

ACC

062/PWU

10000/150/23
(VOL. I)

W
(R
F

10000/150/23
(VOL. I)

WATER, GENERAL
(RATE INCREASES, APPLICATIONS)
FEB. - OCT. 1944

ACC/062/PWU

062/PWU

WATER -- GENERAL

Volume 1

For data, calculations, reports and earlier
correspondence see the undermentioned files:-

Soc. Acquedotto di Napoli

ACC/138/PWU

Soc. Appalti Industria Manifatti
Esercizi (S.A.I.M.E.) Fozzuoli

ACC/139/PWU

Com. Imprese Condotte di Acqua,
Acquedotto Vesuviano, Resine

ACC/136/PWU

MaRATE INCREASES APPLICATIONS"WATER"

(WATER General)

Vol I

Rate Increases Applications

"WATER"

(Water General)

Vol I

OPENED 15 Feb 44.

CLOSED 26 Oct 44.

10000 150 23

THIS FOLDER
CONTAINS PAPERS
FROM FEB 1944
TO OCT 1944
CATALOGUE.

062

31 OCT 1944

062
C/S

180

HEADQUARTERS
ALLIED CONTROL COMMISSION
COMMERCE SUBCOMMISSION
Availability Section
APO 394

STG/JR/ec

Ref. ACC/5201/Commerce

26 October 1944

SUBJECT: Import of Aluminium Sulphate

TO : Regional Commissioner, Lazio-Umbria Region
(Attn. Industry Division)

1. The enclosed copy of letter dated 2 October 1944 which was addressed to Maj. Kaskrey has been passed on to this Sub-Commission.

2. In order to be able to consider the request for a permit for importation of a quantity of aluminium sulphate it is necessary that a list of the undertakings that in the past have placed orders with this firm for the supply of this chemical, be submitted to this Sub-Commission.

3. This list will then be passed on to the Public Works and Utility Sub-Commission of this Headquarters, for their consideration.

As agreed.

For the Acting Chief Commissioner:

W. B. SCOTTEN
Major, M.I.S.
Acting Director
Commerce Subcommission

1 Incl. (as per par. 1)

Copy to: Public Works and Utility Subcommission

244

Noted
3/10

COPY

Rome, October 2, 1944

S.A.T.A.

Public works
Water Supply - Water purification
Consulting, hydraulic and sanitary engineers

A.C.C.
Chemical Office
Col. Maskrey

ROMA

Gentlemen :

OBJECT: Permit for the importation of Aluminium Sulphat from Egypt.

Our Company, grantee, since 1905 of the Jewell Export Filter Company (London and New York), has built almost all the plants for the treatment of drinkable and industrial water of cities, towns Italian great industries, and at present has the charge for the maintenance and the supply of many aqueducts of the liberated provinces. As such our Company used to furnish to great and small aqueducts the necessary quantities of aluminium sulphat for the upkeep of their plants in the treatment of drinkable water.

We have just learned that through the good offices of the British Navy the Municipal Aqueduct of La Maddalena (Sardinia) which at one time was built and managed by us has been authorized to import from Egypt aluminium sulphat. We ask that the same permit should be granted to our Company so that it could be able to import from Egypt 50 (fifty) tons of aluminium sulphat.

This quantity would be distributed by us in fair shares to the various municipal aqueducts of the liberated provinces which, owing to their limited means, would benefit through the services of a company = like ours = which is at full work in the field for the treatment of drinkable water.

Trusting that you will help us in getting the permit to import Aluminium sulphat from Egypt we wish to thank cordially in advance.

Sincerely yours,

S.A.T.A.
Soc. An. Trattamenti acque

2447

3 NOV Read

RESTRICTED

File 062
183
PM 40

RE AC

FOR INFORMATION ONLY

26/03

AC SICILIA REGION

NOV 021710A

ROUTINE

CITE: RSB-613

RESTRICTED. Subject water supply. Reference your 5570 dated 28 October. Requirements for LIPARI Islands are 600 tons monthly in summer, 300 tons monthly in winter. Since August 1, 194 LIPARI Islands supplied by British Naval Base MARINA with old salvaged vessel.

LIST

ACTION: To S/C 2
INFO: A/CC
Sec Sec
Pub Works & E
File 2
Float

Noted
Answer

HEADQUARTERS
7 NOV 1944
A. 2. C.

RESTRICTED

NOV 030930A

31 OCT Recd

062
Oct. 31

Zile

HEDAQUARTERS
AMG. ACC.
ABRUZZI MARCHE REGION
CME.

182

R5/517/15

30 OCT. 1944.

TO : HQ. ACC., P.W. and U. Sub Commission.

SUBJECT : Chieti Reservoir. Repairs.

W/33
W/9
Please note that the project for repairs
to Francavilla al Mare reservoir sent to you on 18 Sept.
was incorrectly designated and was for repairs to Chieti
reservoirs.

Will you please correct the documents in your
possession including the ACC/I (estimated cost L.680.000)
and ACC/2 (Contract let at L.673.179,25 plus 15%.)

For the Regional Commissioner :

J. E. Foden
J. E. FODEN
Major.

Public Works and Utilities Officer
for Regional Engineer.

RECEIVED
31 OCT 1944
A. C. G.

Noted.
Correcting made. The above is an
incorrect statement. See
later correspondence.
J. E. Foden
2145
9901

Tel. 478200

HEADQUARTERS
ALLIED COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/ce

181

28 Oct 44

ACC/062/PWU

SUBJECT: Water Rates (Augmentation), CASERTA.-
Azienda Municipalizzata Acquedotto e
Gazometro, Caserta.

TO : Ministry of Public Works, Italian Government.
(Attention: Comm. Tizzano).

1. We forward herewith for your attention two copies of a letter (No. 908/A), dated 21 Oct. 44, from the above named undertaking.
2. Please review the application and submit to this Sub-Commission your recommendations regarding authorisation of a temporary surcharge.

G.E. Rhodes

2144

B/F 20 NOV.

Enclosure: Copy letter in duplicate.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

G.de CEF/eb

10/11/9

27 OCT Recd

062
Cef

HEADQUARTERS
ALLIED MILITARY GOVERNMENT
LAZIO UMBRIA REGION
(Engineering Division)
APO 394

179 File

26 October 1944

TO : HQ. ACC. (P.W.) ✓
SUBJECT : LITTORIA - Repairs to Acqueduct
IN REPLY QUOTE: R4/ENG/101.135

Your ACC/062/PWU dated 7th October 1944.

This project 101.135 was only transmitted to Minister on 6th
October 1944.

Gravitz

Lt.Col.R.E.

Regional Engineer
Lazio Umbria Region AMG.

Noted
27/10

B/F

20 NOV.

2

Handwritten signature

26 OCT Recd

062
Cels

1st. Ind.

File

178

CU-1401

Hq. Southern Region, ACC., APO 394, U.S. Army, 23 October 1944.

TO: Hq. Allied Control Commission, Public Works and Utilities
Sub-Commission.

1. Basic letter from Azienda Municipalizzata Acquedotto
e Cassometro, Caserta, asking for an increase in water rates,
is forwarded to you for your attention.

LJH/pc.

Lester J. Hensley
LESTER J. HENSLEY

Lt. Col. C.E.
Regional Engr. Officer
Southern Region.

*Copy sent to
Mr. L. J. Paul
for attention
28 Oct*



Azienda Municipalizzata Acquedotto e Gazometro

CASERTA

Prot. N. 908 Alleg.

Risposta alla nota

del 194 N.

To Colonel HANSLY
Office A.C.C.
NAPOLI

The budget of the Provision of water service, approved by the measure n. 45 of December 31st 1943, foresaw the situation before the date of the occupation of the territory of the town by the Allied Forces viz without keeping into account the great economical want of balance after the occupation, and the high prices of the materials and of workmanship.

Such a situation has consequently caused a considerable deficit which this Administration can be resolved only with the increase of the price of water in accordance with what this Command has disposed per other similar corporations.

By this premises, it is very useful to bear the Balance the following variations:

DEBITS BALANCE

Art. Ic - Supports of drawing Caroline water Rise L. 50.000,00
" 6 - Ordinary maintenance and new water service L. 30.000,00

Caserta, 21 Ottobre 1944

Oggetto AUMENTO PREZZO ACQUA

Al Col. HANSLY
Ufficio A.C.C.

NAPOLI

Il Bilancio di Previsione del Servizio Acquedotto, approvato con provvedimento n. 45 del 31 Dicembre 1943, prevedeva la situazione preesistente alla data di occupazione del territorio del Comune da parte delle Truppe Alleate, cioè senza tener conto del forte squilibrio economico conseguente l'occupazione, e gli alti costi dei materiali e della mano d'opera.

Tale situazione ha portato come conseguenza uno sperequaggio rilevante che quest'Amministrazione non può fronteggiare che con un aumento del prezzo dell'acqua in conformità di quanto codesto Comando ha disposto per altri enti similari.

Ciò premesso, si rende indispensabile apportare al Bilancio le seguenti variazioni:

USCITA

Art. Ic - Prelevamento sussidiario acqua Carolino - aumento L. 50.000,00
" 6 - Manutenzione ordinaria e nuovi impianti L. 30.000,00

Indirizzo telegrafico: CASERTA - GAZOMETRO - P. E. Caserta N. 7806

Risposta alla nota

194 N.

TO COLONEL HENSLY
Office A.C.O.C.
NAPOLI

The budget of the Provision of water service, approved by the measure n. 43 of December 31st 1943, foresees the situation before the date of the occupation of the territory of the town by the Allied Forces viz without keeping into account the great economical want of balance after the occupation, and the high prices of the materials and of workmanship.

Such a situation has consequently caused a considerable deficit which this Administration can be resolved only with the increase of the price of water in accordance with what this Command has disposed per other similar corporations.

By this premiss, it is very useful to bear the balance the following variations:

DEBITS BALANCE

Art. 10 -	Supports of drawing	Carolino
" 6 -	water	Rise L. 50.000,00
" 7 -	Ordinary maintenance and new water service	L. 30.000,00
" 8 -	Maintenance charges - water meters and implements	8.000,00
" 12 -	Charges for dug-outs works on account of private-person	L. 80.000,00
" 13 -	Double Christmas wages	L. 12.000,00
	Several contributions on account of the Business	10.000,00

* a fronte 15/11/43

OGGETTO AUMENTO IRREGOLARE

AL COL. HENSLY
Ufficio A.C.O.C.

NAPOLI

Il Bilancio di Previsione del Servizio Acquedotto, approvato con provvedimento n. 43 del 31 Dicembre 1943, prevedeva la situazione preesistente alla data di occupazione del territorio del Comune da parte delle Truppe Alleate, cioè senza tener conto del forte squilibrio economico conseguente l'occupazione, e gli alti costi dei materiali e della mano d'opera.

Tale situazione ha portato come conseguenza uno spavento rilevante che quest'Amministrazione non può fronteggiare che con un aumento del prezzo dell'acqua in conformità di quanto del prezzo dell'acqua ha disposto per altri Enti similari.

Ciò premesso, si rende indispensabile apportare al Bilancio le seguenti variazioni:

USCITA

Art. 10 -	Prelevamento sussidiario acqua
6 -	Carolino - aumento L. 50.000,00
7 -	Mantenimento ordinaria e nuovi impianti.....L. 30.000,00
8 -	Spese manutenzione misuratori ed attrezzi.....L. 8.000,00
12 -	Spese per scavi, opere murarie e carico Privati... L. 80.000,00
13 -	Doppio stipendio natalizio.....L. 12.000,00
	Contributi vari a carico Aziende.....L. 10.000,00

B/F 20 NOV.

Art. 14 - Taxes and duties L. 15.000,00
 15 - Stamps, post marks, writing - materials, etc. L. 50.000,00
 16 - Industrial accident insurance, and.....others L. 20.000,00
 24 - Indemnities, travelling, allowances and repayments of expenses L. 50.000,00
 25 - Indemnities extraordinary work L. 50.000,00
 31 - Purchases of materials for maintenance..... L. 50.000,00
 32 - Purchases of materials for new installations..... L. 50.000,00
 L. 475.000,00
 =====

Since it is only by the Credit that we can provide to such an increase of (expenses) charges and this part of the Balance is in deficit for the diminution of the users on account of the destructions of the buildings by the aer-bombardment;

We beg this Allied Military Command that the increase of the price of the water of L. 0,72 per mc. (as the price of the minimum consumption) and of L. 1,20 of the overplus, may be not less than 120%; and this reason above mentioned; but also for clearing the higher expenses depending either by the increase of the wages and monthly pays (L. 220.000) or for all the works necessary for the maintenance and rebuilding of the existing waterpipings damaged by the intense Military traffic.

Art. 14 - Imposte e tasse L. 15.000,00
 15 - Bolli, Cancellarie, Stampe, Posta, ecc. L. 50.000,00
 16 - Assicuraz. Infortuni e Varie..... L. 20.000,00
 24 - Indennità, trasferte e rimborso spese..... L. 50.000,00
 25 - Indennità lavoro straordinario..... L. 50.000,00
 31 - Acquisto materiali esercizio manutenzione L. 50.000,00
 32 - Acquisto materiali nuovi impianti..... L. 50.000,00
 Lire 475.000,00
 =====

Visto che a tale aumento di spesa non può provvedersi che con la sola entrata, anche perchè questa parte del Bilancio è in diminuzione per riduzione di utenze dipendenti dalla distruzione di fabbricati rimasti sinistrati da bombardamento aereo;

Si chiede a codesto Comando Militare Alleato che l'aumento da apportarsi all'attuale costo dell'acqua di Lire 0,72 al mc. quale prezzo del minimo consumo è L. 1,20 per l'eccedenza, non sia inferiore del 120% da servire oltre che alle ragioni innanzi dette, a far fronte alle maggiori spese dipendenti sia da aumento di salario e stipendi (L. 220.000,00) sia per tutti i lavori necessari alla manutenzione e ricostruzione delle condotture esistenti danneggiate dall'intero traffico Militare.

IL COMMISSARIO STRAORDINARIO
 (Mauro Ferrarese)

25 - Indennità lavoro straordinario
 10..... L.50.000,00

31 - Acquisto materiali esercizio
 manutenzione L.50.000,00

32 - Acquisto materiali nuovi im-
 pianti.....L.50.000,00

Lire 475.000,00

=====

Visto che a tale aumento di spesa non può provvedersi che con la sola entrata, anche perché questa parte del Bilancio è in diminuzione per riduzione di utenze dipendenti dalla distruzione di fabbricati rimasti amministrati da bombardamento aereo;

Si chiede a codesto Comando Militare Alleato che l'aumento da apportarsi all'attuale costo dell'acqua di Lit. 0,72 al mc. quale prezzo del minimo consumo è Lit. 1,20 per l'eccezione, non sia inferiore del 120% da servire oltre che alle ragioni innanzi dette, a far fronte alle maggiori spese dipendenti sia da aumento di salario e stipendi (L.220.000,00) sia per tutti i lavori necessari alla manutenzione e ricostruzione delle condotte esistenti danneggiate dall'intero traffico Militare.

IL COMMISSARIO STRAORDINARIO
 (Luigi Ferraresi)

18

Ferraresi

.....L.50.000,00

25 - Indemnities extraordinary work
L.50.000,00

31 - Purchases of materials for maintenance.....L.50.000,00

32 - Purchases of materials for new installations.....L.50.000,00

L.475.000,00

=====

Since it is only by the Credit that we can provide to such an increase of (expenses) charges and this part of the Balance is in deficit for the diminution of the users on account of the destruction of the buildings by the aer-bombardment;

We beg this Allied Military Command that the increase of the price of the water of Lit. 0,72 per mc. (as the price of the minimum consumption) and of Lit. 1,20 of the overplus, may be not less than 120%; and this reasons above mentioned; but also for clearing the higher expenses depending either by the increase of the wages and monthly pays (L.220.000) or for all the works necessary for the maintenance and rebuilding of the existing waterpipings damaged by the intense Military traffic.

C O P YAZIENDA MUNICIPALIZZATA ACQUEDOTTO E GAZOMETROC A S E R T A

Prot.N.908/A.

Caserta, 21 Ottobre 1943

Oggetto: AUMENTO PREZZO ACQUA

To Colonel HENSLEY
Office A.C.C.
NAPOLI

Al Col. HENSLEY
Ufficio A.C.C.
N A P O L I

The budget of the Prevision of water service, approved by the measure n.49 of December 31 st 1943, foresaw the situation before the date of the occupation of the territory of the town by the Allied Forces viz without keeping into account the great economical want of balance after the occupation, and the high prices of the materials and of workmanship.

Such a situation has consequently caused a considerable deficit which this Administration can be resolved only with the increase of the price of water in accordance with what this Command has disposed for other similar corporations.

By this premiss, it is very needful to bear the Balance the following variations:

DEBITS BALANCE

Art.1c - Supports of drawing Carolino water Rise L.50.000,00
2
6 - Ordinary maintenance and new water service L.30.000,00
5
7 - Maintenance charges - water meters and implements 8.000,00

Il Bilancio di Previsione del Servizio Acquedotto, approvato con provvedimento n.49 del 31 Dicembre 1943, prevedeva la situazione preesistente alla data di occupazione del territorio del Comune da parte delle Truppe Alleate, cioè senza tener conto del forte squilibrio economico conseguente all'occupazione, e gli alti costi dei materiali e della mano d'opera.

Tale situazione ha portato come conseguenza uno spareggio rilevante che questa amministrazione non può fronteggiare che con un aumento del prezzo dell'acqua in conformità di quanto codesto Comando ha disposto per altri Enti similari.

Ciò premesso, si rende indispensabile apportare al Bilancio le seguenti variazioni:

U S C I T A

Art. 1c - Prelevamento sussidiario acqua Carolino - aumento L.50.000,00
6 - Manutenzione ordinaria e nuovi impianti..... L.30.000,00
7 - Spese Manutenz.misuratori ed attrezzi..... L. 8.000,00

AZIENDA MUNICIPALIZZATA ACQUEDOTTO E GAZOMETROC A S E R T A

908/A.

Caserta, 21 Ottobre 1944

Oggetto: AUMENTO PREZZO ACQUA

Colonel HENSLEY
 Vice A.C.C.
NAPOLI

Al Col. HENSLEY
 Ufficio A.C.C.
N A P O L I

The budget of the Provision of water, approved by the measure n.49 of the 31st of December 1943, foresaw the situation at the date of the occupation of the territory of the town by the Allied Forces without keeping into account the great real want of balance after the occupation, and the high prices of the material and of workmanship.

Such a situation has consequently caused a considerable deficit which this situation can be resolved only by an increase of the price of water in accordance with what this Command has decided in other similar corporations.

On this premiss, it is very useful to show the Balance the following variations:

DEBITS BALANCE

Supports of drawing Carolino water Rise L. 50.000,00
 Ordinary maintenance and new water service L. 30.000,00
 Maintenance charges - water meters and implements 8.000,00

Il Bilancio di Previsione del Servizio Acquedotto, approvato con provvedimento n.49 del 31 Dicembre 1943, prevedeva la situazione preesistente alla data di occupazione del territorio del Comune da parte delle Truppe Alleate, cioè senza tener conto del forte squilibrio economico conseguente all'occupazione, e gli alti costi dei materiali e della mano d'opera.

Tale situazione ha portato come conseguenza uno spreco rilevante che quest'Amministrazione non può fronteggiare che con un aumento del prezzo dell'acqua in conformità di quanto codesto Comando ha disposto per altri Enti similari.

Ciò premesso, si rende indispensabile apportare al Bilancio le seguenti variazioni:

U S C I T A

Art. 1c - Prelevamento sussidiario acqua Carolino - aumento L. 50.000,00
 6 - Manutenzione ordinaria e nuovi impianti..... L. 30.000,00
 7 - Spese Manutenz. misuratori ed attrezzi..... L. 8.000,00

Art. 9 - Charges for dug-onts works on
accout of private-person
.....L.80.000,00

" 12 - Double Christmas wages
.....L.12.000,00

" 13 - Several contributions oc accout
of the Business.... 10.000,00

14 - Taxes and duties L.15.000,00

15 - Stampe, post marks, writing -ma-
terials, etc.....L.50.000,00

16 - Industrial accident insurance,
andothers L.20.000,00

24 - Indemnities, travelling, allowan-
ces and repayments of expenses
.....L.50.000,00

25 - Indemnities extraordinary work
.....L.50.000,00

31 - Purchases of materials for mainte-
nanceL.50.000,00

32 - Purchases of materials for new
installations....L.50.000,00

L.475.000,00
=====

Since it is only by the Credit that
we can provide to such an increase of
(expenses) charges and this part of the
Balance is in deficit for the diminution
of the users on accout of the destructions
of the buildings by the aer-bombardment;

We beg this Allied Military Command
that the increase of the price of the water
of L.0,72 per mc. (as the price of the mi-
nimum consumption) and of L.1,20 of the

Art. 9a - Spese per scavi, opere mu-
a carico Privati... L.80.000,00

12 - Doppio stipendio natalizio
.....L.12.000,00

13 - Contributi vari a carico
daL.10.000,00

14 - Imposte e tasse L.15.000,00

15 - Bolli, Cancelleria, Stamp
Posta, ecc..... L.50.000,00

16 - Assicuraz. Infortuni
e Varie..... L.20.000,00

24 - Indennità, trasferte e rin-
so spese..... L.50.000,00

25 - Indennità lavoro straor-
dio..... L.50.000,00

31 - Acquisto materiali esero
manutenzione L.50.000,00

32 - Acquisto materiali nuovi
pianti.....L.50.000,00

Lire 475
=====

Visto che a tale aumento di
non può provvedersi che con la so-
ta, anche perché questa parte del
è in diminuzione per riduzione di
dipendenti dalla distruzione di
rimasti sinistrati da bombardame

Si chiede a codesto Comanda-
tare Alleato che l'aumento da ap-
all'attuale costo dell'acqua di
al mc. quale prezzo del minimo c

charges for dug-outs works on
 account of private-person
L.80.000,00
 double Christmas wages
L.12.000,00
 several contributions on account
 of the Business.... 10.000,00
 taxes and duties L.15.000,00
 stamps, post marks, writing ma-
 terials, etc.....L.50.000,00
 industrial accident insurance,
 andothers L.20.000,00
 indemnities, travelling, allowan-
 ces and repayments of expenses
L.50.000,00
 indemnities extraordinary work
L.50.000,00
 purchases of materials for mainte-
 nanceL.50.000,00
 purchases of materials for new
 installations.....L.50.000,00

 L.475.000,00
 =====

it is only by the Credit that
 provide to such an increase of
 charges and this part of the
 in deficit for the diminution
 on account of the destructions
 buildings by the aer-bombardment;
 by this Allied Military Command
 increase of the price of the water
 per mc. (as the price of the mi-
 nimum) and of L.1,20 of the

Art. 9a - Spese per scavi, opere murarie
a carico Privati... L.80.000,00

- 12 - Doppio stipendio natalizio
.....L.12.000,00
- 13 - Contributi vari a carico Azien-
daL.10.000,00
- 14 - Imposte e tasse L.15.000,00
- 15 - Bolli, Cancelleria, Stampe,
Posta, ecc..... L.50.000,00
- 16 - Assicuraz. Infortuni
e Varie..... L.20.000,00
- 24 - Indennità, trasferte e rimbor-
so spese..... L.50.000,00
- 25 - Indennità lavoro straordina-
rio..... L.50.000,00
- 31 - Acquisto materiali esercizio
manutenzione L.50.000,00
- 32 - Acquisto materiali nuovi im-
pianti.....L.50.000,00

Lire 475.000,00
 =====

Visto che a tale aumento di spesa
 non può provvedersi che con la sola entra-
 ta, anche perchè questa parte del Bilancio
 è in diminuzione per riduzione di utenze
 dipendenti dalla distruzione di fabbricati
 rimasti sinistrati da bombardamento aereo;

Si chiede a codesto Comando Mili-
 tare Alleato che l'aumento da apportarsi
 all'attuale costo dell'acqua di Lire 0,72
 al mc. quale prezzo del minimo consumo e

overplus, may be not less than 120%; and this reasons above mentioned; but also for clearing the higher expenses depending either by the increase of the wages and monthly pays (L.220.000) or for All the works necessary for the maintenance and rebuildings of the existing waterpipings damaged by the intense Military traffic.

L.1,20 per l'eccedenza, non sia inferiore del 120% da servire oltre che alle ragioni innanzi dette, a far fronte alle maggiori spese dipendenti sia da aumento di salario e stipendi (L.220.000,00) sia per tutti i lavori necessari alla manutenzione e ricostruzione delle condotture esistenti danneggiate dall'intero traffico Militare.

IL COMMISSARIO STRAORDINARIO
(Mauro Ferrarese)

(firmato:) Ferrarese

2:37

not less than 120%; and
ve mentioned; but also for
her expenses depending ei-
ase of the wages and mon-
.000) or for All the works
e maintenance and rebuil-
sting waterpipings damaged
ilitary traffic.

L.1,20 per l'eccedenza, non sia inferio-
re del 120% da servire oltre che alle
ragioni innanzi dette, a far fronte alle
maggiori spese dipendenti sia da aumento
di salario e stipendi (L.220.000,00) sia
per tutti i lavori necessari alla manu-
tenzione e ricostruzione delle condotture
esistenti danneggiate dall'intero traffi-
co Militare.

IL COMMISSARIO STRAORDINARIO
(Mauro Ferrarese)

(firmato:) Ferrarese

Tel. 489081

402 062

HWW/mc

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

176

ACC/108/PWU

21 Oct. 1944

Subject: TERNI - Repairs to water distribution system.

To : Ministry of Public Works, Italian Government.
(Attention: Comm. Tizzano)

For your information we enclose a copy of Form ACC/1, approving the expenditure of Lire 2,000,000 on a portion of the above named scheme. You will observe that the estimate submitted to this Sub-Commission amounted to Lire 6,500,000, but we have not seen fit to approve the entire project at this stage.

G.E.R.

Enclosure: Form ACC/1
Copy to File 062

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

2436

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/bb

ACC/062/PTU

20 Oct 44

SUBJECT: FOGGIO BUSTONE (Rieti Province).-
Reconstruction of Aqueduct.

TO : Regional Commissioner, Lazio-Umbria Region,
(Attention: Regional Engineer).

1. Reference your letter RA/ENG/101.272, dated 5 Oct 44.
2. We have examined the scheme carefully. Incidentally, it contains many errors, mostly arithmetical, but they are too numerous and complex to be enumerated and explained in this letter.
3. The project essentially comprises an entirely new scheme which was prepared in 1940. We do not question the desirability of a new water supply system for the town but we doubt whether it should be approved under the guise of war damage repairs. Compensation for war damage is not in principle intended to provide something better than existed before. At the same time we appreciate that if the cost of repairing the existing unsatisfactory system be comparable with that of providing a new and better one, there can be no doubt that it would be common sense economy to adopt the latter.
4. As the project involves expenditure on work other than actual emergency needs it would in any case be desirable to refer it to the Italian Government; but, as the Province of Rieti has lately been 'handed over' to the Italian Government, the scheme must now of necessity be submitted by you through Italian 'channels' in the first place, in accordance with our prescribed procedure. All the documents are, therefore, returned herewith in order that you may do this.
5. In submitting the scheme to the Genio Civile, will you please point out the considerations mentioned in para 3 above.
6. Correction of the errors in computation would reduce the estimate of the unaltered scheme from Lire 2,574,000 to about Lire 2,472,000. In addition to this reduction, however, we think

that it might be possible to effect some actual saving by modifying certain engineering details. These arithmetical errors and technical alterations can better be explained verbally.

G.E.R.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Enclosure: One folder documents.

243

Acting Director, FILE

~~I think you ought
to remove this, please.~~

Read.
Discussed today with ~~Mr. [unclear]~~
Major Bruce - Smart. Comm. 18 Oct.
Cagliari.

They must work out!
their own solution!

File

GER.
18/10

21/10
11/10
23/10

17 OCT 1944

HEADQUARTERS 06 Feb
ALLIED CONTROL COMMISSION
SARDINIA REGION

13th October 1944.

To : Commander, Allied Garrison for Sardinia.

Subject : Water Supply.

Reference : PM/1313.

1. The water situation in CAGLIARI has now become critical and I feel I must represent the facts to you. They are given briefly below.

2. In July the Italian Engineers drew attention to the excessive use of water and, by agreement with Allied Garrison, the 24 hour supply was reduced to 16 hours - water being cut off from 2100 hours to 0500 hours each night as from 6th August. This produced an immediate drop in the water consumption figures from about 18,000 cubic metres to 13,000 cubic metres.

3. By the end of August it was clear that the daily consumption was still too great but the Engineer of the Allied Garrison (Major Romage) was very unwilling to agree to any further restriction in hours.

The Italian Authorities however, pressed for further restriction and the hours were accordingly again reduced to 12 hours daily from 0700 hours to 1900 hours on 10th September.

This had the effect of reducing water consumption to below 10,000 cubic metres per day and by the 21st September the consumption had dropped to below 7,000 cubic metres per day so that prospects were reasonable.

Since that date consumption has gone back (by about 2000 tons) are being supplied with water and that in some cases it has even been suggested that fresh water is used to wash down ships.

4. At the present rate of consumption water will fail altogether. A very serious situation which will affect the health of the population of over 60,000 inhabitants and Allied Troops.

5. I have made several visits to the reservoirs and propose to make another visit with the Prefect on the 15th October and will then, if necessary, put up proposals for a further drastic cut in consumption. The Italian Authorities are not in a position to make such a cut at present.

2. In July the Italian Engineers drew attention to the excessive use of water and, by agreement with Allied Garrison, the 24 hour supply was reduced to 16 hours - water being cut off from 2100 hours to 0500 hours each night as from 6th August. This produced an immediate drop in the water consumption figures from about 18,000 cubic metres to 13,000 cubic metres.
3. By the end of August it was clear that the daily consumption was still too great but the Engineer of the Allied Garrison (Major Romage) was very unwilling to agree to any further restriction in hours.
- The Italian Authorities however, pressed for further restriction and the hours were accordingly again reduced to 12 hours daily from 0700 hours to 1900 hours on 10th September.
- This had the effect of reducing water consumption to below 10,000 cubic metres per day and by the 21st September the consumption had dropped to below 7,000 cubic metres per day so that prospects were reasonable.
- Since that date consumption has gone back (by about 2000 tons) to between 9,000 and 10,000 cubic metres per day and I understand that ships are being supplied with water and that in some cases it has even been suggested that fresh water is used to wash down ships.
4. At the present rate of consumption water will fall altogether, except for the small DOMUSNOVAS supply, between the 7th and 10th of November. A very serious situation which will affect the health of the population of over 60,000 inhabitants and Allied Troops.
5. I have made several visits to the reservoirs and propose to make another visit with the Prefect on the 15th October and will then, if necessary, put up proposals for a further drastic cut in hours of supply which the Italian Authorities are quite willing to face. Rain so far has not begun to fill the reservoirs at all.
6. I have been informed by Captain Pates, Engineer of the Allied Garrison, that the requirements in water for ships, which is a military necessity, has resulted in the Italian Engineer being ordered from time to time (in particular on the night of the 11/12 October) to leave the water on all night to supply ships.
- The point is, however, that if water is turned on when it is supposed to be off, on the plea of military necessity, there may soon be no water at all.
- Until rain comes in large quantity we are powerless to produce water and a serious military and civil situation may therefore arrive very shortly if the Cagliari supply becomes exhausted.

W. M. D. DIV.	
DATE	17 Oct. 44.
REF. No.	WMD

/ Continued
HEADQUARTERS

17 OCT 1944

A C C

7. The Italian people are quite willing to face a further cut in hours of water, but this method of saving is not likely to be fully effective, as is shown by the figures I have quoted, unless the military necessity for economy in water is also fully recognised. May orders please, therefore, be issued to warn all concerned that a dangerous water situation is now arising.

JAMP/ajs.

J. A. O. Pennyquix
Colonel

J. A. O. PENNYQUIX,
Colonel,
Regional Commissioner.

Copy to :- Port Authority, CAGLIARI.

H.Q. A.C.O. /

Noted
11/11/50

Tel. 489081

HWW/mc

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

173

ACC/108/PWU

18 Oct. 1944

Subject: Pettorano sul Gizio.- Repair of water supply.

To : Ministry of Public Works, Italian Govt.
(Attention: Comm. Tizzano)

For your information we enclose a copy of Form ACC/1,
approving the above named scheme for execution at an estimated
cost of Lire 400,000.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Copy to File 062

Enclosure: Form ACC/1.

2131

MC/gb

10 OCT Recd

062 CEB

C 591

HEADQUARTERS
ALLIED MILITARY GOVERNMENT
LAZIO-UMBRIA REGION
(Engineering Division)
APO 394

File 72

10 October 1944

TO : HQ.ACC. (Public Works and Utilities Sub-Commission) ✓

SUBJECT : TERNI - repairs to water distribution system.

IN REPLY QUOTE: R4/ENG/101.291

W/39

1. Enclosed is form ACC/1 in triplicate, please return in duplicate with approval (£. 6,500.000).
2. Enclosed is copy of complete scheme (6 elaborates) and list of controlled materials, for retention by you.

A.G. Evans

A.G. EVANS, Major R.E.
for Regional Engineer
Lazio-Umbria Region AMG.

Enclosures 10

£2,000.000 only approved.

See letter.

[Signature]

22.9.44

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

171
HWW/bb

ACC/093/PWU

18 Oct 44

SUBJECT: Services by Italian Government.- Supply of
RE Stores.

TO : HQ., AAI.

1. Ref. your letter 2073/4/1/02 of 25 Sep 44. and
your reminder, of same reference, dated 13 Oct.

2. This HQ is in agreement with your proposed to
notify the FA, AFHQ, of the details of RE Stores supplied to
the Azienda Municipalizzata Acquedotto e Gasometro, for use in
carrying out essential repairs to the water supply system of
CASERTA town. Your list of the said stores has been noted.

3. This HQ would be glad to know, please, whether
you are able to quote the voucher numbers in accordance with
para 3 of GKO 479/43.

For the Chief Commissioner,

G.E.R.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Copy to File 062.

Tel. 489081

HWW/mc

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

170

ACC/062/PWU

18 Oct. 1944

Subject: Pettorano sul Gizio. - Repair of water supply.

To : Regional Commissioner, Abruzzi-Marche Region.
(Attention: Regional Engineer).

1. Reference your letter RS/517/15 dated 14 Oct. 44.
2. The scheme is approved. One copy of Form ACC/1, duly counterbigned, is returned herewith.
3. Please submit Form ACC/2, in triplicate, as soon as practicable.

 MAJOR R.E.
WESTWOOD

 G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Enclosure: Form ACC/1

ENGINEERING DIVISION
HEADQUARTERS
AMG

15 OCT 1944

062
14 Oct. 1944

R5/5I7/I5

To :HQ,ACC,PW and U. Sub_Commission.

Subject :Pettorano sul Gizio .repairs to water Supply System

Relazione,estimate and form ACC/I covering
the above project is forwarded for your consideration
and approval.

W/37

FOR THE REGIONAL COMMISSIONER :

HEADQUARTERS
15 OCT 1944
A. C. G.

J. E. Foden

J. E. FODEN
Major,

PUBLIC WORKS and UTILITIES OFFICER
for REGIONAL ENGINEER.

*For (Cm)
18 Oct.*

17-1

18 Oct. 2:27

7436

- 8 burned 062
~~100~~ 062

AGE/gb

CO 500
168HEADQUARTERS
ALLIED MILITARY GOVERNMENT
LAZIO-UMBRIA REGION
(Engineering Division)
APO 394

5 October 1944

TO : HQ.ACC.(Public works and Utilities Sub-Commission) ✓

SUBJECT : RIETI Province - reconstruction of the ~~ac~~queduct for the Commune of Poggio Bustone.

IN REPLY QUOTE: R4/ENG/101.272

W/38

1. Enclosed is form ACC/1 in triplicate, please return in duplicate with approval (£. 2,574.000).

2. Enclosed is copy of following for retention by you:

- a) relazione e calcoli
- b) planimetria
- c) " agglomerati rurali
- d) profilo longitudinale
- e) opere d'arte
- f) computo metrico e stima
- g) capitolato speciale d'appalto.

3. Controlled materials required: original demand (see ACC/1 para f.) of 66 Tons Cement, is to be reduced to 35 Tons; the proposed construction of new reservoir having been deleted (the estimate has thus been reduced from £. 3.065.000 to 2,574.000).

All other materials are available locally.

* All documents
returned without letter
062 of 20 Oct., in order
that they might be submitted
to the Genio Civile first.

20 Oct.

A.G. Evans.
A.G. EVANS, Major R.E.
for Regional Engineer
Lazio-Umbria Region AMO.

2428

167

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 994

HWW/bb

ACC/093/PWU

18 Oct 44

SUBJECT: CAMBRIA Water Supply. - Issue of Stores from
Royal Engineer Stocks.

TO : Regional Commissioner, Southern Region.
(Attention: Regional Engineer).

1. We enclose two copies of letter 2073/4/1/02 of
25 Sep 44, from HQ. AAI to HQ. ACC. We also enclose two copies
of the list referred to.

2. We have replied that this HQ. is in agreement with
the proposal to notify the FA, AFHQ, but we have asked whether
HQ AAI is in a position to quote the voucher numbers in accordance
with para 3 of GPO 479/43.

3. Para 3 of GPO 479/43 also states: ".....care must
be taken that AMGOT retains one copy of such vouchers". Are copies
of the relevant vouchers retained in your office? We are anxious
to have details of them, please, in order that the transaction
may be checked.

G.R.
G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Copy to File 062

Enclosures: Two copies of letter referred to.
" " " list " "

2:25

Tel: 189081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HTW/60

ACC/062/P&U

17 Oct 44

SUBJECT: Ente Autonomo per l'Acquedotto Pugliese.

TO : The Minister of Public Works, Italian Government.

In regard to certain difficulties which are understood to have been experienced in the management of the above named undertaking, especially concerning the appointment of a President and the replacement of the Technical Director, we should be interested to know what developments have taken place and what is the present state of the matter.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director

See folios
131, 148
+ 165.
then
folios
12 in
new
file

B/F
See folio
12
next
volume
ob2.
30 Oct
12/12

Ref. attached. —

062

FILE

After discussion with the
Acting Director, I drafted a Brief
Letter to the Minister of Public Works.

Folio
166

Thompson

17 Oct.

Folios 131 and 148
also refer. 2123

15 OCT 1944 062

SOUTHERN REGION
ALLIED CONTROL COMMISSION
BARI PROVINCERef. BZ/PWU 2/13
6. October 1944Subject: ENTE AUTONOMO PER L'ACQUEDOTTO PUGLIESETo : DIRECTOR, PUBLIC WORKS & UTILITIES, SUB COMMISSION

Reference your letter ACC/062/PWU dated 4. Sept. 1944.

It appears that the position to be filled in the Ente Autonomo per l'Acquedotto Pugliese is that of President. The person now filling that position is Ing. De Romanis, who is Inspector General of the Genio Civile. He was appointed to fill vacancy temporarily by the Italian Government, until such time as a permanent appointment was made.

The President and the Vice President are appointed by the Italian Government, they are responsible for the General Administration on the Ente Autonomo per l'Acquedotto Pugliese, in collaboration with a commission composed of the Provincial Administrations and include four members of the following Italian Ministries.

2	members from the Public Works Ministry
1	" " Finance Ministry
1	" " Interior Ministry
1	" " Agriculture Ministry

These are appointed by the Ministry to which they belong to attend all meetings that take place.

The technical side is controlled by a Chief Engineer (Direttore dell'esercizio e manutenzione dell'Acquedotto Pugliese e fognatura), who has full control.

I have seen Ing. De Romanis, and he informs me that there are four candidates for the Post of Chief Administrator. Their names are as follows.

ADMIRAL PANUNZIO who lives in Bari, and belongs to no political party.
Sig. CAPACCHIONE a Lawyer, lives in Barletta and is a Socialist.
Sig. LA VOLPE, a lawyer, lives in Bari and is a Liberal.
Sig. LATERZA a Printer, lives in Bari, and is a Liberal.

It seems that the last three are not very much in favour. Ing. De Romanis states that Admiral Panunzio is a very respected man, and considers that he is the right man to fill the vacancy. This in view of the fact that he belongs to no political party, and has therefore an

HEADQUARTERS
15 OCT 1944

The President and the Vice President are appointed by the Italian Government, they are responsible for the General Administration on the Enge Autonomo per l'acquedotto Pugliese, in collaboration with a commission composed of the Provincial Administrations and include four members of the following Italian Ministries.

2 members from the Public Works Ministry
1 " " Finance Ministry
1 " " Interior Ministry
1 " " Agriculture Ministry

These are appointed by the Ministry to which they belong to attend all meetings that take place.

The technical side is controlled by a Chief Engineer (Direttore dell'esercizio e manutenzione dell'Acquedotto Pugliese e fognatura), who has full control.

I have seen Ing. De Romanis, and he informs me that there are four candidates for the Post of Chief Administrator. Their names are as follows.

ADMIRAL PANUNZIO who lives in Bari, and belongs to no political party.
Sig. CAPACCHIONE a Lawyer, lives in Barletta and is a Socialist.
Sig. LA VOLPE, a lawyer, lives in Bari and is a Liberal.
Sig. LATERZA a Printer, lives in Bari, and is a Liberal.

It seems that the last three are not very much in favour. Ing. De Romanis states that Admiral Panunzio is a very respected man, and considers that he is the right man to fill the vacancy. This in view of the fact that he belongs to no political party, and has therefore an open mind politically.

The Ing. Celentani who was Direttore dell'esercizio e manutenzione dell'acquedotto was reputed to have fascists leanings. His case is coming up now for reconsideration.

The man who was appointed in his place is Ing. Palazze, who was Genio Civile Rome. He was appointed to the vacancy by the Ministry of Public Works. Ing. De Romanis states, has, taken over, and is running things now satisfactorily.

The below mentioned are the Chiefs of their Departments.

1. Ing. Bassi, vice director dell'esercizio
2. Ing. Gavaliere, Capo della Segreteria dell' direttore dell'esercizio
3. Ing. Di Lonardo, Ispettore Servizi esterni
4. Ing. Dorrucchi, Ispettore Servizi interni
5. Ing. De Salvia Capo Divisione Servizi Esterni
6. Ing. Nanni, Capo Divisione Fognatura.
7. Ing. Carabellese, Capo Divisione impianti elettrici e di sollevamento (opere di presa e di adduzione).

- . Ing. Fera Capo Divisione, reti distribuzio e utenze.
- . Ing. Orabona Capo Divisione Studi e progetti.

The number of employees dismissed were 38, five of whom were Engineers. Ing De Romanis states that things are working smoothly and that there are not difficulties.

M

W. Knight
Major W. Knight
P.U. Engineer
ACC&(LO)ROADS
Southern Region

P.S. I have discussed the matter with the Zone Commissioner, and he states he does not know any of the applicants for the vacancy, and he has no suggestions.

2121

8 OCT Recd
062
CEB

HEADQUARTERS
ALLIED CONTROL COMMISSION
SARDINIA REGION

PW + 164

2nd October 1944

To : H. C. , A. C. C. , Public Works and Utilities
Sub-Commission.

Subject : Electricity Report, Sardinia

Reference: Tptn/1610

White
File
R

Reference your ACC/052/PWU dated 26 Sept. 44.

Receipt is acknowledged of the three copies
of the map of the Sardinian Electric System for which we
thank you.

For the Regional Commissioner,

G. F. T. WAGSTAFF

G. F. T. WAGSTAFF
Captain

Secretary

HEADQUARTERS
3 OCT 1944
A C C

GFTW/cjm

Major Penton

make
sent
me
white

HEADQUARTERS
ALLIED CONTROL COMMISSION
SARDINIA REGION

2nd October 1944

To : H. Q., A. C. C., Public Works and Utilities
Sub-Commission.

Subject : Electricity Report, Sardinia

Reference: Tptn/1610

Reference your ACC/052/PWU dated 26 Sept. 44


Receipt is acknowledged of the three copies
of the map of the Sardinian Electric System for which we
thank you.

For the Regional Commissioner,

G. F. T. Wagstaff

GFTW/cjm

G. F. T. WAGSTAFF
Captain
Secretariat

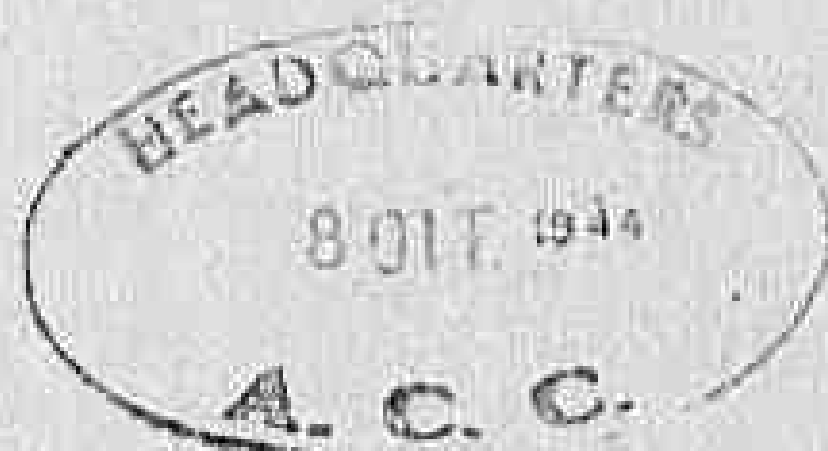

2419

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWB/bb

ACC/062/PWU

7 Oct 44

SUBJECT: LITIORIA - Repairs to aqueduct.

TO : Regional Engineer, Lazio Region.

1. Ref. your letter RA/ENG/101.35 of 12 Sep 44, to Genio Civile; copy to us.

2. We are writing to inform you that we have heard nothing further of this scheme.

*See reply dated 26 Oct.
Scheme not sent
to Minister until
6 Oct.*

G.E. RHODES .
Lieut-Colonel, R.E.,
Acting Director.

2417

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/bb

161

ACC/062/FWU

9 Oct. 44

SUBJECT: SIMBRIVIO Water Supply.- Form A CC/2.

TO : Regional Engineer, Lazio and Umbria Region.

1. Ref. your letter RA/ENG/101.5, dated 7 Oct. 44.
2. One copy of form ACC/2, duly countersigned, relating to the sum of Lire 2,500,000 (being a portion of Part 2 of the complete project), is returned herewith.
3. Your explanation regarding the expenditure of the balance of Lire 3,100,000 is noted.


MAJOR P.F.

for Acting Director.

HEADQUARTERS
ALLIED MILITARY GOVERNMENT
LAZIO-UMBRIA REGION
(Engineering Division)
APO 394

AGE/gb

FILE

Co 524

262060

7 October 1944

TO : HQ./ACC. (P.W.U. Sub-Commission) ✓

SUBJECT : SIMBRIVIO - Water Supply

IN REPLY QUOTE : R4/ENG/101.5

90

Reference your letter ACC/062/PWU of 5 August 1944.

1. Forms ACC/2 in triplicate in the sum of £. 2,500.000 are forwarded for approval.
2. These relate to the approval for expenditure of £. 5,600.000 given in your letter under reference.
3. The balance of £. 3,100.000 is to be used for payment for materials purchased direct from Stocks and for payment of bills for sundry small portions of the work executed direct by a number of Comunes sewed by the ~~ab~~queduct.

A.G. Evans

A.G. EVANS, Major R.E.
for Regional Engineer
Lazio-Umbria Region AMG

Enclosures: 3

2115

~~Handwritten~~
9/10

Tel. 489081

HW/mc

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

159

ACC/064/PWU

6 October 1944

Subject: Adjustment of Utility Rates.

To : Ministry of Public Works.
(Att. Comm. Tizzano)

1. Reference your letter No. 50 of 20 Sept. 44.

2. You state that you have not received certain of the communications enumerated in our letter of 12 Sep. 44. Two of them (both dated 28 July 44, reference ACC/065/PWU, and relating to gas rates of Castellammare, Bari and Nocera) were subsequently referred to in our letter ACC/065/PWU of 13 Aug. 44, regarding gas rates of Salerno, which letter has already received your attention. If on receipt of the last mentioned letter you had not received the two letters of 28 July, we cannot understand why you did not say so. Furthermore, the application of the Soc. An. Idroelettrica di Castelbottaccio, Campobasso, was forwarded together with the application of the Prefettura di Foggia (see paragraphs 4 and 5 of our covering letter, reference ACC/064/PWU, dated 27 July 44). You say that you have not received the former and yet you acknowledge that you are dealing with the latter. Surely you have made an error.

3. In view of the above, will you please make a further thorough search for the communications which you say you have not received. As all the letters in question were delivered by our own messengers we find it difficult to believe that they have gone astray.

4. We should appreciate an early reply.

GER.
G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Copies to Files 062 and 065.

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/lam

158

ACC/108/PWU

5 October 1944

Subject: Pescara - Repairs of two aqueducts.

To : Ministry of Public Works, Italian Govt.
Att. Comm. Tizzano.

For your information we send with this letter a copy of Form ACC/1, approving a project for repairing the two aqueducts of Pescara at an estimated cost of Lire 928,000.-

G. E. RHODES
Lieut-Colonel, R.E.
Acting Director

Copy to file 062.

2412

Del. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/cc

157

ACC/O62/PWU

5 Oct. 44

SUBJECT: Pontecagnano -- Montecorvino Pugliano.-
Water Supply.

TO : Regional Engineer, H.Q., Southern Region.

1. The enclosed forms ACC/1, relating to a scheme in connexion with the above named water supply and estimated to cost Lire 3,761,000 appear to have been received from you direct. They are, therefore, returned in order that the prescribed procedure may be followed.

2. 'Civil' schemes over Lire 1,000,000, after approval by the Regional Engineer, should be submitted 'through Italian channels' to this HQ. for final approval.

G.E.

G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

Encl.

File 062

156

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

CCG/bb

ACC/108/PWU

4 October 1944

SUBJECT: Capetrano - Repair of the water supply.

TO : Ministry of Public Works.
Att. of Comm. Tizzano.

For your information we forward herewith a signed copy of form ACC/1, approving a supplementary estimate for the repairs to the water system of Capetrano.

C.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director. 211

Copy to File 062.

Tel: 489081

2.6-062
HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

GC/lam 55

ACC/108/PWU

4 October 44

Subject: Water Supply of Navelli.
To: Ministry of Public Works
Att. of Comm. Tizzano.

The enclosed copy of form ACC/1, approving the scheme for repair of the Navelli water supply at an estimated cost of Lire 33,000, is forwarded for your information.

G.E. RHODES
Lieut-Colonel, R.E.
Acting Director.

Copy to file 062 —

2109

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

GC/lan

154

ACC/108/PWU

4 October 1944

Subject: Castelvechio Subegno - Repairs to
water supply system.

To : Ministry of Public Works
Att. of Comm. Tizzano.

For your information we forward herewith a signed copy
of form ACC/1, approving a scheme for the repair of the water
supply system in Castelvechio Subegno, at an estimated cost
of Lire 44.000.-

get.
G.E. RHODES
Lieut-Colonel, R.E.
Acting Director

Copy to file 062

2108

HEADQUARTERS
LAZIO REGION A.M.G.
(Engineering Division)
APO 394

28 SEP 1944
062
al

AM/ph

153
CO-224

27th September 1944

TO : HQ. ACC. Public Works and Utilities - Sub-Commission
APO 394

SUBJECT : Weekly water reports

IN REPLY QUOTE : R4/ENG/90.1

1. Further reference your letter ACC/063/PWU dated Sept. 7th 1944.
2. Herewith copies of water reports for weeks ending August 6, 13, 19, 26, 21.
3. Copies of later weekly water reports are being sent to you direct by Maj. Michel Public Works (RC) - Section of this Division.

Lt. Col. R.E.

Regional Engineer
Lazio Region A.M.G.

Enclosures : 5

Unsigned and no enclosures.

After telephone request
by me, a further copy, signed
and accompanied by enclosures,
has now been received.

May 9/45

843240 27.
Seen by
Major Westwood
file

2407

Ref: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

G.C./lam

ACC/062/PWU

4 October 1944

SUBJECT: Frosinone Province - Repair of Water
Supply of S. Apollinare.

TO : Regional Engineer H.Q. Lazio Region.

1. Ref. your letter R4/ENG/101.67 dated 21 Sept.44.
2. One copy of form ACC/2 is returned herewith, duly approved and counter signed.-


H. W. WESTWOOD

MAJOR R.E.

~~W.M. LAPPER~~

~~Lieut-Colonel~~

 Chief Electrical Division

Enclosure:

Form. ACC/2

2108

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
AFD 394

151
HWW/bb

ACC/062/PWU

4 Oct. 44

SUBJECT: CAPESTRANO.- Repair of water supply.
Supplementary Estimate.

TO : Reg. Engineer, HQ. Abruzzi-Marche Region.

1. Ref. your letter R5/517/15 of 26 Sep 44.
2. One copy of your form ACC/1, signed and countersigned, is returned herewith.
3. Please note that as this scheme involves the use of critical materials the approval of this Hq. was necessary. Latest instructions on this matter, dated 15 Sep 44, refer.
4. Please submit form ACC/2 as soon as possible.

 MAJOR R.E.

 ~~W.M. LARTER~~
Lieut-Colonel,
Chief Electrical Division.

2405

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

GC/bb

150

ACC/062/PWU

4 Oct. 44

SUBJECT : Castelveccchio Subegno - Repairs to water supply system.
TO : Regional Engineer, HQ. Abruzzi-Marche Region, AMG/ACC

1. Ref. your letter R.5/517/15 dated 28 Sept. 44.
2. Approval having been given to the Castelveccchio Subegno Scheme for repairs to the water supply system, we return to you herewith one copy of form ACC/1, duly signed and countersigned, approving the scheme at an estimated cost of lire 44,000.
3. As soon as possible please submit form ACC/2 in triplicate.

MAJOR. RE

~~W.M. LATTER~~

Lieut-Colonel
Chief Electrical Div 2402

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

CC/bb


ACC/062/PWU

4 Oct 44

SUBJECT: Water Supply, Navelli.

TO : Regional Engineer, HQ. Abruzzi-Marche Region A.M.G./ACC.

1. Ref. your letter R5/517/15 dated 27 Sep 44.
2. Approval having been given to the scheme for repair of the Navelli water supply, we return to you herewith one copy of form ACC/1, duly signed and countersigned, approving the project at an estimated cost of Lire 33,000 .
3. Please submit form ACC/2 in triplicate as soon as possible.


MAJOR. RE.


~~W.M. LAFER,~~
Lieut-Colonel,

Chief, Electrical Div.

2403

File 148

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/db

ACC/062/FWU

3 October 1944

SUBJECT: Acquedotto delle Puglie.

TO : Major Knight, BARI.

1. Ref. our letter ACC/062/FWU of 12 Sep. 44. *(131)*
2. We should be glad to know the present position, please.

*See 165.
Also see 166
and new volume
12*

G.E.R.

G.E. RHODES 2102
Lieut-Colonel, R.E.,
Acting Director.

CONFIDENTIAL

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWB/ob

ACC/062/PWU

3 October 1944

SUBJECT: BOLOGNA Water Supply.

TO : Regional Engineer, EMILIA Region.

The attached two copies of Intelligence Report D-133
(CONFIDENTIAL), dated 21 Sept. 44, are forwarded for your information.

G.E.R.
G.E. RHODES,
Lieut-Colonel, R.E.,
Acting Director.

CONFIDENTIAL

2102

29 SEP Recd 062
108 sub. File

146

To : HQ, ACC, PW and U. Sub_Commission.
From : Engineering Division, HQ, AMG, Region 5.
Subject : Castelveccchio Subequo. Repairs to water supply system.
Ref : R5/517/I5.
Date : 28 Sept 1944.



Forms ACC/I in triplicate, relations and estimate for repairs to the water Supply system at Castelveccchio Subequo (Aquila) at a cost of L 44,000 are forwarded for your approval.

FOR THE REGIONAL COMMISSIONER :

*Letter drafted
Mw
3/10*

J.E. Foden

J. E. FODEN
Major.

UTILITIES OFFICER
for REGIONAL ENGINEER

2100

6171

28 SEP Recd

File 062

145

To : HQ, ACC, P. W. U. and Sub Commission.
From : Engineering Division, HQ, AMG, Region 5.
Subject : Water Supply, Navelli.
Ref : R5/5I7/I5.
Date : 27 Sept. 1944.

W/35

Forms ACC/I in triplicate, relazione and estimate for repairs to the water supply system at Navelli are forwarded for you consideration

Lire 33,000

FOR THE REGIONAL COMMISSIONER :

HEADQUARTERS
28 SEP 1944
A. C. C.

J. E. Foden

J. E. FODEN
Major,

UTILITIES OFFICER
for REGIONAL ENGINEER

*Approved
Letter drafted
Mason
11/10*

2393

6124

To :HQ,ACC,P.W. and U. Sub_Commission.

From :Engineering Division,HQ,AMG,Region 5.

Subject :Capestrano ~~Water~~ Water System. Supplementary Estimate.

Ref :R5/5I7/I5.

Date ::26 Sept 1944.

Herewith two copies of form ACC/I in respect of a
supplementary estimate for L. 65,000 approved by the Regional Engi-
neer in connection with repairs to the Capestrano water system.

FOR THE REGIONAL COMMISSIONER :



J. E. Foden

J. E. FODEN
Major,

UTILITIES OFFICER
for REGIONAL ENGINEER

Notes: As this involves critical
materials, the approval
of HQ is necessary.
Letters drafted.

W. W. W.

3/10

6065

TRANSLATION

MINISTRY OF PUBLIC WORKS
Electricity, Gas and Water Section

Filo 062
Rome 21 September 1944
143

to : Ufficio Idrografico - Ispettorato Generale E.A.G.
per l'Italia Meridionale - NAPOLI and for information

HQ. ALLIED CONTROL COMMISSION P.W. & U. S.C.

I am forwarding for your examination the enclosed documents regarding the application N° 6 made by the Società Meridionale Acquedotti for rate increase. I'd appreciate a prompt reply.


In the examination a sur-charge for the current year must be considered.

THE INSPECTOR GENERAL

Ing. Visentini

Noted
11/23/44
2/13

May Barry



27 SEP Recd

*cel
062*

Roma 21 Settembre 1944

Ufficio Idrografico - Ispettorato Generale E.A.G. per l'Italia meridionale

NAPOLI

Ministero dei Lavori Pubblici
Ufficio Centr. Elett. - Acqua-Gas

72 52

e p.c.

Headquarter's Allied Control Commission-Subcommission

Public Works and Utilities

A.P.O. 394 - Via Veneto

ROMA

Oggetto Domanda per aumento tariffe.
Società Meridionale Acquedotti
(Torre Annunziata).

Trasmetto per l'istruttoria e perchè mi venga poi riferito al riguardo con cortese sollecitudine gli atti relativi alla domanda 6 c.m. della Società Meridionale Acquedotti per aumento di tariffe agli utenti dell'acquedotto di Torre Annunziata.

Nell'esame, dovrà essere tenuto conto della opportunità di fissare un sopraprezzo che possa essere ritenuto valido per tutto l'anno in corso.

L'ISPETTORE GENERALE

W. Venturi

p.s.

*Copy sent
Please have translated
and ready for Monday 2*

*Noted
1/10/44
2/9/44*

Si prega di inviare per ogni lettera, solo argomenti e conclusioni nella risposta

L'Ufficio Idrografico è a disposizione per ogni informazione

MC/gb

22 SEP Recd

062

P. W & U

142

FILE 062

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

21 September 1944

TO : HQ.ACC. (Public works & Utilities Sub-Commission) ✓
SUBJECT : FROSINONE PROVINCE - Repairs of water supply of S. Apollinare.
IN REPLY QUOTE: R4/ENG/101.67

1. Reference your letter of 21 August 1944 (under N° ACC/062/PWU) approving expenditure of £. 4,000.000 on this project.
2. Forms ACC/2 in triplicate are forwarded herewith for approval and distribution (one copy to this office).
3. Genio Civile has been authorised to accept this tender and work is in hand.

A. G. Evans

A.G. EVANS, Major R.E.
for Regional Engineer ACC.IV.

Enclosures: 3 copies ACC/2 form.

Major Westwood

*Letter drafted
11/10
3/10*

GER

22/9

239

ob2 Major Westerman R/40
 To: Lt. Col. C.A. Latimer, C.E. Eng. Sect. Reg. 5
 From: Major J.S. Bennett, Eng. Sect. Reg. 5.
 Subject: Accomplishments in Chieti, Pescara, Teramo and Ascoli Provinces
 Date: 15 September 1944.

When A.M.G. came in the areas around Chieti and Pescara practically every Commune was without water and there was no electricity in any Commune because the Germans had destroyed the plants, lines and reservoirs.

W A T E R.

The most pressing problem was to get water for the people.

- 1./ Ninety-seven (97) Communes have been given water. See attached list.
- 2./ Two concrete reservoirs are being constructed for the city of Chieti and other small Communes in the area.
- 3./ Planes and forms have been prepared and sent in to build a concrete reservoir for Francavilla al Mare. Contracts have been received and the work will begin as soon as the project is approved.
- 4./ Water was secured for Ortona, Orsogna and other Communes after several meetings with the local Authorities and Army Engineers in that area.
- 5./ Water has been given to a large part at Pescara and the second supply will be finished in two weeks so the whole city should have water then. Much work has been done and much more is to be done in the city because practically all buildings have their plumbing broken and these must be shut off or repaired before water can be turned on in any area.
- 6./ A survey was made of Agnone Water Supply and the Officials were shown how they could restore the water. All material was on hand so this should have been completed without delay.
 Practically all water supplies are used by several Communes so when a system is repaired it supplies several Communes.

E L E C T R I C I T Y.

- 1./ See attached report on Central Stations.
- 2./ In Chieti Provinces electricity (in limited quantity) has been restored in 108 Communes. In Pescara Province electricity has been restored in 65 Communes. See attached list.

lines and reservoirs.

W A T E R.

The most pressing problem was to get water for the people. 1./ Sixty-seven (97) Communes have been given water. See attached list.

2./ Two concrete reservoirs are being constructed for the city of Chieti and other small Communes in the area.

3./ Pipes and forms have been prepared and sent in to build a concrete reservoir for Francavilla al Mare. Contracts have been received and the work will begin as soon as the project is approved.

4./ Water was secured for Ortona, Orsogna and other Communes after several meetings with the local Authorities and Army Engineers in that area.

5./ Water has been given to a large part at Pescara and the second supply will be finished in two weeks so the whole city should have water then. Much work has been done and much more is to be done in the city because practically all buildings have their plumbing broken and these must be shut off or repaired before water can be turned on in any area.

6./ A survey was made of Agnone Water Supply and the Officials were shown how they could restore the water. All material was on hand so this should have been completed without delay.

Practically all water supplies are used by several Communes so when a system is repaired it supplies several Communes.

E L E C T R I C I T Y.

1./ See attached report on Central Stations.

2./ In Chieti Provinces electricity (in limited quantity) has been restored in 108 Communes. In Pescara Province electricity has been restored in 65 Communes. See attached list.

3./ An oil engine at Pescara has been repaired and is in operation (110 K.V.A.)

4./ Power line from Chieti to Popoli is being repaired ²⁷⁹ to ~~263~~ to furnish power to Aquila.

5./ Assisting in getting materials and transport for the repairs of several power stations in the area shown on the list of Central stations.

6./ Rationing of electricity to mills as there is a much greater demand than there is electricity. When the power line from Lanciano to Pescara is finished this should be relieved.


The power line from Lanciano to Pescara should be finished Oct. 1st.

-2-

7./ In securing water and electricity for these places it has been necessary to meet with Officials and engineers and make plans and secure materials and transport. In most cases it was necessary to convince them that they must use materials on hand even though it was not the most desirable; we could not get but small quantities of certain materials. In most all cases we have gotten good cooperation. In some cases I have had to show the engineers how the work could be done with local materials. We have gotten repairs made and materials in local and Army repair shops. It has required lots of patience following up otherwise the job would stop.

M I S C E L L A N E O U S.

- 1./ The Cement plant at Bomba was stopped because the Germans took all the Belts from the plant. These belts have been approved and are on their way to the plant. This plant should be in operation within five days. This will relieve the cement situation in this area. Cement is needed on almost all jobs and there is practically none in this area. This plant has enough material including coal to produce 800 tons of cement.
- 2./ We expect to get the asphalt plant at Scaffa San Valentino going soon. The power line to this plant is being repaired. Some other material is needed and we are trying to secure that as soon as possible.
- 3./ The old steel railroad bridge at Pescara has been repaired and even though it is not finished it is being used for light traffic. This will relieve traffic over the Bailly bridge.
There have been many problems in this area but in most all cases they have been solved and the people satisfied. The area has been taken care of fairly well and will be in good condition when the electricity begins to flow from Lanciano to this area about Oct. 1st.

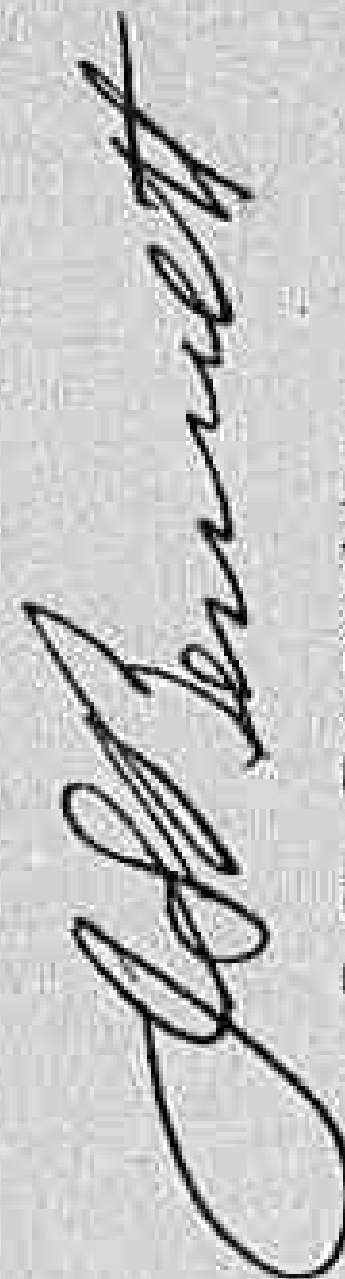

J.S. Bennett
Major Eng. Sect. Reg. 5

Copy to:
Lt. Col. Lapper
A.C.C.

2394

MINISTERO DEI LAVORI PUBBLICI
UFFICIO DEL GENIO CIVILE DI CHIETI

=====

ELENCO DEI COMUNI DELLA PROVINCIA DI CHIETI FORNITI DI

ACQUEDOTTI.

*Communes that have been supplied with
Water since A.M.G. moved in.*

N°	COMUNI	Note
1	ALTINO	In riparazione
2	ARCHI	
3	ARI	
4	ARIELLI	
5	ATESSA	
6	BOMBA	
7	BORRELLO	
8	BUCCHIANICO	
9	CANOSA SANNITA	
10	CARPINETO SINNELLO	
11	CARUNCHIO	
12	CASACANDITELLA	
13	CASALANGUIDA	
14	CASALBORDINO	
15	CASALINCONTRADA	
16	CASOLI	
17	CASTELPRENTANO	
18	CASTELGUIDONE	
19	CASTIGLIONE MESSER MARINO	
20	CELENZA SUL TRIGNO	
21	CHIETI	

239

Communes that have been supplied with
water since A.M.G. moved in.

N°	COMUNI	Note
1	ALTINO	In riparazione
2	ARCHI	
3	ARI	
4	ARIELLI	
5	ATESSA	
6	BOMBA	
7	BORRELLIO	
8	BUCCHIANICO	
9	CANOSA SANNITA	
10	CARPINETO SINNELLO	
11	CARUNCHIO	
12	CASACANDITELLA	
13	CASALANGUIDA	
14	CASALBORDINO	
15	CASALINCONTRADA	
16	CASOLI	
17	CASTELFRENTANO	
18	CASTELGUIDONE	
19	CASTIGLIONE LESSER MARINO	
20	CELENZA SUL TRIGNO	
21	CHIETI	
22	CIVITALUPARELLA	
23	CIVITELLA M. RAIMONDO	
24	COLLEDIMACINE	
25	COLLEDIMEZZO	

2393

N°	COMUNI	Note
26	CRECCHIO	In riparazione
27	CUPELLO	
28	DOGLIOLA	
29	PARA FILIORUM PETRI	
30	PARA S. MARTINO	
31	FILETTO	
32	FOSSACESIA	
33	FRATINE	
34	FRANCAVILLA A MARE	
35	FRESAGRANDINARIA	
36	FRISA	
37	FURCI	
38	GAMBERALE	
39	GESSOPALENA	
40	GISSI	In riparazione
41	GIULIANO TEATINO	
42	GUARDIAGRELE	
43	GUILMI	
44	LAMA DEI PELIGNI	
45	LANCIANO	
46	LENTELLA	
47	LISCIA	
48	MIGLIANICO	
49	MONTAZZOLI	
50	MONTERRANTE	
51	MONTENERODOMO	
52	MONTEODORISIO	
53	MOZZAGROGNA	
54	ORSOGNA	

In riparazione

30	FARA S. MARTINO
31	FILETTO
32	FOSSACESIA
33	FRAINE
34	FRANCIVILLA A MARE
35	FRESAGRAN DINARIA
36	FRISA
37	FURCI
38	GAMBERALE
39	GESSOPALENA
40	GISSI
41	GIULIANO TEATINO
42	GUARDIAGRELE
43	GUILMI
44	LAMA DEI PELIGNI
45	LANCIANO
46	LENTELLA
47	LISCIA
48	MIGLIANICO
49	MONTAZZOLI
50	MONTERRANTE
51	MONTENERODOMO
52	MONTEDORISIO
53	MOZZAGROGNA
54	ORSOGNA
55	ORTONA A MARE
56	PAGLIETA
57	PALENA
58	PALMOLI

In riparazione

N°	C O M M U N I	Note
59	PALOMBARO	
60	PENHADOMO	
61	PENNAPIEDIMONTE	
62	PERANO	
63	PIZZOFERRATO	
64	POGGIOFIORITO	
65	POLLUTRI	
66	PRETCRO	
67	QUADRI	
68	RAPINO	
69	RIPATEATINA	
70	ROCCAMONTEPIANO	
71	ROCCA S. GIOVANNI	
72	ROCCASCALLEGNA	
73	ROCCASPINALVETI	
74	ROIO DEL SANGRO	
75	ROSELLO	
76	S. BUONO	
77	S. GIOVANNI LIPIONI	
78	S. GIOVANNI TEATINO	
79	S. MARTINO S. MARRUCINA	
80	S. SALVO	
81	S. MARIA IMBARO	
82	S. EUSANIO DEL SANGRO	
83	S. VITO CHIETINO	
84	SCERNI	
85	SCHIAVI DI ABRUZZO	

63	PIZZOFERRATO
64	POGGIOFIORITO
65	POLLUTRI
66	PRETORO
67	QUADRI
68	RAPINO
69	RIPATEATINA
70	ROCCAMONTEPIANO
71	ROCCA S. GIOVANNI
72	ROCCASCALLEGNA
73	ROCCASPINALVETI
74	ROIO DEL SANGRO
75	ROSELLO
76	S. BUONO
77	S. GIOVANNI LIPIONI
78	S. GIOVANNI TEATINO
79	S. MARTINO S. MARRUCINA
80	S. SALVO
81	S. MARIA IMBARO
82	S. EUSANIC DEL SANGRO
83	S. VITO CHIETINO
84	SCERNI
85	SCHIAVI D'ABRUZZO
86	TARANTA PEGIGNA
87	TOLLO
88	TORINO DI SANGRO
89	TORNARECCIO
90	TORREBRUNA
91	TORREVECCIA TEATINA

In riparazione

2392

N°	COMUNI	Note
92	TORRICELLA PELIGNA	
93	TREGLIO	
94	TUFILLO	
95	VACRI	
96	VASTO	
97	VILLALFONSINA	
98	VILLAMAGNA	
99	VILLA S. MARIA	

CUNETI 12 SET 1944

I comuni che ebbero danneggiati gli acquedotti in Provincia di Pescara al momento dell'allontanamento dei tedeschi sono:

Bussi (officine)

Cappelle sul Tavo

Montesilvano

Pescara

Popoli

Torre de' Passeri

In tutti gli acquedotti dei predetti comuni sono state eseguite subito riparazioni, sicchè sono state ripristinate le forniture d'acqua a:

Bussi (Officine)

Cappelle sul Tavo

Montesilvano (in linea provvisoria, essendo in corso riparazioni organiche)

Pescara

(limitatamente all'acquedotto di Pescara Centrale, essendo in corso le riparazioni all'acquedotto della Val di Foro in Prov. di Chieti)

Popoli

(riparato con alcune varianti rispetto all'acquedotto preesistente)

Torre de' Passeri.

Nota - A Bussi (Paese) non vi è attualmente l'acqua perchè manca

2391

Pescara

Popoli

Torre de' Passeri

In tutti gli acquedotti dei predetti comuni sono state eseguite subito riparazioni, sicchè sono state ripristinate le forniture d'acqua a:

Bussi (Officine)

Cappelle sul Tavo

Montesilvano (in linea provvisoria, essendo in corso riparazioni organiche)

Pescara

(limitatamente all'acquedotto di Pescara Centrale, essendo in corso le riparazioni all'acquedotto della Val di Foro in Prov. di Chieti)

Popoli

(riparato con alcune varianti rispetto all'acquedotto preesistente)

Torre de' Passeri.

Nota - A Bussi (Paese) non vi è attualmente l'acqua perchè manca l'energia elettrica per il pompaggio).

Pescara,

13 SET 1944

E. Ingennere Bussone

m. Lavaggi

2391

Tel: 489081

file 139
HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/lam

AGC/062/PWU

23 Sept. 1944

SUBJECT: CHIETI Water Supply - Cement.

TO : Regional Engineer, Hq. Region V, AMG/ACC

If you have not yet obtained release of the cement which you requested on Form MAT/10 for the above named scheme, will you please inform us.

[Signature]
H.W. WESTWOOD
Major, R.E.
for Lieut-Colonel
Chief, Electrical Division

2393

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWH/lmb

228

ACC/062/PWU

22
22 Sept. 1944

SUBJECT: Francavilla a Mare Water Supply. Repair of
Reservoirs.

TO : Regional Engineer, Hq. Region V, AMG/ACC

1. The above named scheme having been approved for execution, at an estimated cost of 580,000 Lire, we return to you herewith one copy of form ACC/1, duly signed and countersigned.

2. Please submit form ACC/2 in triplicate in due course.

Hwy
H. F. WESTWOOD
Major, R.E.
for Lieut-Colonel
Chief, Electrical Div.

Copy to File ACC/108/P.W.U.

138
HWW/db

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 994

ACC/108/PWU

22 September, 1944

SUBJECT: Francavilla a Mare Water Supply.- Repair of
Reservoirs.

TO : Ministry of Public Works, Italian Government
(Attn. Comm. Tizzano).

For your information we send to you with this letter a copy
of form ACC/1, approving the above named scheme for execution at an
estimated cost of Lire 680,000.

GER.

G.E. PHOENIX,
Lieut-Colonel, R.E.,
Acting Director.

Copy to File 062. 

238

UC/80

File 062

16 SEP 1944

16 SEP 1944

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
ATO 394

12 September 1944

TO : Ispettore Generale Compartimentale
del Comando Civile per il Lazio & Umbria,
R O M A, Via Montenapoleone 10

SUBJECT : LITTORIA - repairs to aqueduct.

IN REPLY QUOTE : RA/ENG/101,135

Reference to your letter 1948 of 9 September 1944.

1. Approval in principle is given to this scheme in the sum of

W/32 £. 5,449,500.-

in accordance with the following summary:

- a) riparazione della condotta adduttrice e della rete di distribuzione. £. 150,000
- b) installazione provvisoria di due pompe in località Littoria - Scalo e Ninfa " 58,000
- c) installazione provvisoria di un gruppo elettropompe nella centrale di Ninfa " 18,000
- d) riparazione del muro di ritenuta della centrale elettrica di Ninfa " 56,000
- e) sistemazione definitiva della condotta adduttrice da Ninfa e Littoria. " 1,100,000
- f) fornitura e installazione di due nuove elettropompe e sistemazione definitiva della centrale di Ninfa 2,750,000
- g) ricostruzione definitiva delle installazioni elettriche nella centrale di Ninfa " 30,000

Dr. Col. G. G. G.

This should be

reviewed carefully

D. J. 179

TO : Ispettore Generale Compartimentale
del Genio Civile per il Lazio & Umbria,
Roma, Via Manzoni 10

SUBJECT : LITTORIA - repairs to aqueduct.

IN REPLY QUOTE : RA/ENC/101.135

Reference to your letter 1948 of 9 September 1944.

1. Approval in principle is given to this scheme in the sum of

£. 5,449,500.--

in accordance with the following summary:

- | | |
|--|------------|
| a) riparazione della condotta adduttrice e della rete di distribuzione. | £. 150,000 |
| b) installazione provvisoria di due pompe in località Littoria - Scalo e Ninfa | 58,000 |
| c) installazione provvisoria di un gruppo elettropompe nella centrale di Ninfa | 12,000 |
| d) riparazione del muro di ritenuta della centrale elettrica di Ninfa | 56,000 |
| e) sistemazione definitiva della condotta adduttrice da Ninfa e Littoria. | 1,100,000 |
| f) fornitura e installazione di due nuove elettropompe e sistemazione definitiva della centrale di Ninfa | 2,750,000 |
| g) ricostruzione definitiva delle installazioni elettriche nella centrale di Ninfa | 30,000 |
| h) riparazione del vecchio serbatoio di Littoria. | 1,287,500 |

in totale. £. 5,449,500

2. After approval has been given from Ministry, final approval of HQ. ACC. (P.W.U.) will be necessary.

B/P to me
26 Sep
[Signature]

1.
[Signature]

11/11/49

the Col. Cooper
This should be reviewed carefully
11/9

- 2 -

3. Remarks:

- 1) These works are all deemed necessary some time.
- 2) An explanation should be obtained with regard to Item 1. (150,000 as this work was done in June under 5. Army and should have been regularised 2 months ago. No request for such regularisation has been submitted and it was assumed that it had been financed by 5 Army at the time.
- 3) I would direct attention to the many outstanding Water Supply problems in South LITTORIA for which full reports (in absence of any action by Capo del Genio Civile) by Prof. COLOMBINO were obtained and sent to you early in August. - The position of these towns is much worse than that of LITTORIA which appears to me to be receiving an undue share of attention. -

Enclosures:

Copy to:

Mr. ACC. Public Works & Utilities Sub-Commission
 Provincial Commissioner of LITTORIA Province
 Ingegnere Capo del Genio Civile di LITTORIA

G. Goldsmith

Lt. Col. R.E.
 Regional Engineer ACC. IV.

2382

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

G.de CEF/ph

18 September 1944

TO : HQ. ACC. Public Works & Utilities Sub-Commission, (Util. and Adm. Div.).
SUBJECT : Water supply Schemes General.
IN REPLY QUOTE : RA/ENG/101.36

In reply to your ACC/362/FWS dated 13 September 1944 (Util. and Adm. Div.).

ACC/1 The final solution of Gaeta, Itri, Terracina, Fondi - are all dependent on final house rebuilding policy. The temporary solutions are as under.

RA/ENG/101.36. GAIETA. Approved for £. 1,000,000 on firm holding Maintenance contract on 12th August and work is in hand. Hastener for ACC/2 sent 24 August.

RA/ENG/101.40. ITRI. MAT 10 submitted 3 August for 7,000 mtrs. 2" piping - no result yet. Instructions issued to act at once on 7th August. ACC/1 hastened on 17th August. Received for £. 2,950,000 on 7 September. Original estimate was £. 1,800,000.-

A possible cheaper and quicker solution is being investigated and approval (in absence of materials) has been withheld.

RA/ENG/101.37 TERRACINA. ACC/1 approved for £. 980,000 on 14th August ACC/2 demanded not yet received. I gave verbal instruction to Ing. Capo del Genio Civile on 19th July after visiting job and delay had and has been unwarrantable. Water has been reported running at a fountain.-

RA/ENG/101.39. FONDI. Military Pump was removed without notice leaving town without water and orders were given on 3 August to act on report by Prof. COLCHI-MO. Hastener on 25 August as a report had been received from Comune that work was in hand - again delay.

ACC/2
RA/ENG/101.5 SIMBREVIO Aqueduct (Part 2)

ACC/1 approved by ACC. (F.W.U.) on 14th August for £. 5,600,000

ACC/2 not yet received.-

INTERAMNA AQUEDUCT OF S. APOLLINARE

RA/ENG/101.67 ACC/1 approved from ACC (FWU) for 4,000,000 on 21 August and forwarded same day for action.- No action yet.

Regional Engineer ACC. IV

Lt.Col.R.E.

C O P Y

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

C.de CRF/ph

18 September 1944

TO : HQ.ACC. Public Works & Utilities
Sub-Commission, (Util. and Adm.Div).

SUBJECT : Water supply Schemes General.

IN REPLY QUOTE : R4/ENG/101.36.

In reply to your ACC/062/PWU dated 10 September 1944 (Util. and Adm.Div).

ACC/1 The final solution of Gaeta, Itri, Terracina, Fondi - are all dependent on final house rebuilding policy. The temporary solutions are as under.

R4/ENG/101.36. GAETA. Approved for L.1.000.000 on firm holding Maintenance contract on 12th August and work is in hand. Hastener for ACC/2 sent 24 August.

R4/ENG/101.40. ITRI. R4/1 submitted 3 August for 7.000 mtrs. 2" piping - No result yet. Instructions issued to act at once on 7th August. ACC/1 hastened on 17th August. Received for L.2.950.000 on 7 September. Original estimate was L. 1.800.000.-

A possible cheaper and quicker solution is being investigated and approval (in absence of materials) has been withheld.

R4/ENG/101.37. TERRACINA. ACC/1 approved for L. 980.000 on 14th August ACC/2 demanded not yet received. I gave verbal instruction to Ing. Capo del Genio Civile on 19th July after visiting job and delay had and has been unwarrantable. Water has been reported running at a fountain.-

R4/ENG/101.39. FONDI. Military Pump was removed without notice leaving town without water and orders were given on 3 August to act on report by Prof. Colosimo. Hastener on 25 August as a report had been received from Comune that work was in hand - again delay.

ACC/2

R4/ENG/101.5. BIKERIVIO Aqueduct (Part 2)

ACC/1 approved by ACC. (P.W.U.) on 14th August for L.5.600.000

ACC/2 not yet received.-

238

INTERAMNA ACUEDUCT OF S. APOLLINARE

R4/ENG/101.67. ACC/1 approved from ACC (PWU) for 4.000.000 on 21 August and forwarded same day for action.- No action yet.

(sgd) C.E. FINDLAY Lt.Col.R.R.
Regional Engineer ACC.IV

C O P Y

/cc

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

C.de CBF/ph

18 September 1944

TO : HQ.ACC. Public Works & Utilities
Sub-Commission, (Util. and Adm.Div).

SUBJECT : Water supply Schemes General.

IN REPLY QUOTE : R4/ENG/101.36.

In reply to your ACC/062/PWU dated 10 September 1944 (Util. and Adm.Div).

ACC/1 The final solution of Gaeta, Itri, Terracina, Fondi - are all dependent on final house rebuilding policy. The temporary solutions are as under.

R4/ENG/101.36. GAETA. Approved for L.1.000.000 on firm holding Maintenance contract on 12th August and work is in hand. Hastener for ACC/2 sent 24 August.

R4/ENG/101.40. ITRI. MAT 10 submitted 3 August for 7.000 mtrs. 2" piping - No result yet. Instructions issued to act at once on 7th August. ACC/1 hastened on 17th August. Received for L.2.950.000 on 7 September. Original estimate was L. 1.800.000.-

A possible cheaper and quicker solution is being investigated and approval (in absence of materials) has been withheld.

R4/ENG/101.37. TERRACINA. ACC/1 approved for L.980.000 on 14th August ACC/2 demanded not yet received. I gave verbal instruction to Ing. Capo del Genio Civile on 19th July after visiting job and delay had and has been unwarrantable. Water has been reported running at a fountain.-

R4/ENG/101.39. FONDI. Military Pump was removed without notice leaving town without water and orders were given on 3 August to act on report by Prof. Colosimo. Hastener on 25 August as a report had been received from Comune that work was in hand - again delay.

ACC/2

R4/ENG/101.5. SIMBRIVIO Aqueduct (Part 2)

ACC/1 approved by ACC. (P.W.U.) on 14th August for L.5.600.000.

ACC/2 not yet received.-

INTERAMNA AQUEDUCT OF S. APOLLINARE

R4/ENG/101.67. ACC/1 approved from ACC (PWU) for 4.000.000 on 21 August and forwarded same day for action.- No action yet.

(sgd) C.E. FINDLAY Lt.Col.R.E.

Regional Engineer ACC.IV

HEADQUARTERS
SOUTHERN REGION, ALLIED CONTROL COMMISSION
APO 394, U.S. Army

14 September 1944

CU-1140

SUBJECT : Cast Iron and Steel Water Pipes and Fittings.
TO : Advanced Headquarters Public Works and Utilities,
Sub-Commission.
(Attn. Lt. Col. Lapper)

1. This material was requisitioned by P.B.S. Engineer Supply Section, and was not available to this office.

2. Your letter dated 5 July 1944, ACC/062/PWU was forwarded to P.B.S. for direct reply to your office.

LJH/dp.

Lester J. Hensley
LESTER J. HENSLEY
Lt. Col. C.E.,
Regional Engineer Officer
Southern Region.

Lt Col Lapper
Recd 18/9

Maj Greenwood
after to Maj Porei
Recd

2383

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 3 94

HWB/bb

ACC/062/PWU

15 Sept. 44

SUBJECT: Request for augmentation of Water Rates -
Societa' Meridionale Acquadotti
(TORRE ANNUNZIATA).

TO : Ministry of Public Works
(Attn. Comm. Tizzano).

The attached application, dated 6 Sept. 44, from the above named Company, is forwarded for examination by you, please, and for submission of your recommendations to this Sub-Commission.

W.M. LAFER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

Enc : Letter and Report from a/m Societa'.

2382

12 SEP Recd

062
C.B.

FILE

133

HEADQUARTERS
SOUTHERN REGION, ALLIED CONTROL COMMISSION
APO 394, U.S. Army

11 September, 1944

CU-1116

SUBJECT : Increase in Water Rates.

TO : Advanced Headquarters Public Works and
Utilities Sub-Commission ACC.

We forward to you a request for increase in Water
Rates from the Società Meridionale Acquedotto of Torre
Annunziata, for your information and attention.

LJH/dp.

Lester J. Hensley
LESTER J. HENSLEY
Lt. Col. C.E., *sup*
Regional Engineer Officer
Southern Region.

W. Col. Dapper

W. J. 13/9

Maj. Westwood

W. J. C.

*Letter to main
drafted 10/9
238
sent 15 Sep.*

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/mc

132

ACC/064/PWT

12 Sept. 1944

Subject: Adjustment of Utility Rates.

To : Ministry of Public Works.
(Att. Comm. Tizzano)

Appended hereto is a list of applications for augmentation of Utility Rates which have been forwarded to you by this Sub-Commission and in respect of which your recommendations are awaited. Some of them have been passed to you very recently but we think you will agree that others have been in your hands for a very long time. Your expeditious attention to these applications would be appreciated.

In the following list we quote the references and dates of our covering letters to you.

<u>Name of Undertaking</u>	<u>Our reference</u>	<u>Date of our letter</u>
- Prefettura di Foggia	064	27 Jul 44
- Società Anonima Idroelettrica di Castelbottaccio, Campobasso	064	27 Jul 44
- Bari (Gas) (Compagnia)	065	28 Jul 44
- Nocera Inferiore (Gas) (Meridionale)	065	28 Jul 44
- Castellammare (Gas) (del Gas)	065	28 Jul 44
- Azienda Idro-Elettrica, Calabritto	064	12 Aug 44
- Unione Esercizi Elettrici	064	16 Aug 44
- Società Elettrica Sarda, Sardegna	064	19 Aug 44
- Esercizio Acquedotto di Salerno	062	28 Aug. 44
- Foro (d'Ischia) (Elettricità)	064	3 Sept 44
- Esercizio Romana Gas	065	4 Sept 44

Copies to: File 062 —
" " File 065

L.A. JENNY,
Lt-Colonel, 223
Director.

Tel. 489081

131 LAJ/mo
file

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

AGC/062/PWU

12 Sept. 1944

Subject: Acquedotto delle Puglie.

To : Major Knight, Bari.

I have been advised that there has been considerable difficulty in the management of the above named company; that politicians were trying to place some political head over the affairs of that company but can not come to an agreement on the choice; that Admiral PANUNZIO, who lives in Bari, was highly regarded and was acceptable as a compromise appointee.

Will you please look into the management of this company and advise me who the present head is, ^{who} and the principal officials are and what their difficulties are.

When you have the proper background please discuss the above matter with ^{our} Provincial Commissioner to see if he has any suggestions before I take the matter up with the Minister; then write me fully so I may take proper action.

c.c. Lt.Col. Lapper.

L.A. JENNY,
Lt-Colonel, C.E.,
Director.

*Remian sent
3 Oct.
Jolis 148.*

*See Jolis
166*

2379

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/aa

130

ACC/062/PWU

10 Sept. 44

Subject: Cast Iron and Steel Water Pipes and Fittings.

To : Regional Engineer, HQ ^{Southern} Region ~~ACC~~, AMG/ACC.

1. Reference our letter ACC/062/PWU of 5 July 44.
2. We cannot trace having received a reply from you yet.
3. Kindly attend to the matter without further delay.

W. M. LAPPER,
Lt. Colonel,
Chief, Util. & Admin. Div.

2378

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

FILE
129
HWW/bb

ACC/062/PWU

10 Sept, 44.

SUBJECT: Water Supply Schemes.-
Forms ACC/1 and ACC/2

TO : Regional Engineer, H.Q., Region IV, AMG/ACC
(Attn. Lt.Col. Findlay).

1. Will you please note that we are awaiting your
Submission of forms ACC/1 and ACC/2 in connection with water
supply schemes as indicated below.-

ACC/1

GAETA
ITRI
TERRACINA
FONDI

ACC/2

SIMBRIVIO (PART 2)
ACQUEDOTTO INTERAMNA
(S. APOLLINARE).

for reply
see letter of
18 Sept 44
Reg Eng. IV
this file
136
24/9

W.M.
W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

B/H 20 Sep
2377

HEADQUARTERS
ALLIED MILITARY GOVERNMENT
REGION IV
APO 394
TCU DIV.

12 AUG Recd

062

al

CRB/mp

10 August 1944

5A/TCU/1500/90.2

SUBJECT: Report on Rome Region
Water Section

TO : Pub. Wks. Sub Commission ACC
Thru Regional Commissioner, Region IV

1. Forwarded herewith is information requested at
last regional meeting, as regards the Water Section -
Rome Region.

HEADQUARTERS
12 AUG 1944

C. R. Birchett

C. R. BIRCHETT
Lt. Col. C.E.
Dir. TCU Div.

Copy to:
Pub. Wks. Sub Commission ACC

By Col. Laffer
12/8

Have discussed this
with Col. Laffer, and also
with Capt. Dwyer.

FILE 2378

Handwritten signature
7 Sept.

90

Director Engineering Division
Subject A.C.C. Sub Commission/sg
128B
24 July 1944

1) Report Rome Region Water Section

2)

(a) Number of vehicles

	Cars	Trucks	Small Trucks	M/Cycles
Marcia Coy	5	2	3	8
Metano Coy	3	4	2	2
AGEA	10	8	21	5

and 2 Mobile Overhead wire repair platforms

Rome Region 3. (Supervision)

(b) Estimated tyres for three month

Both covers and tubes

130 x 40	3 N.
140 x 40	3 "
150 x 40	5 "
300 x 19	3 "
400 x 15	20 "
400 x 17	6 "
425 x 17	50 "
500 x 15	39 "
550 x 15	16 "
550 x 17	6 "
600 x 16	4 "
14 x 45	4 "
42 x 9	4 "
25 x 2.75	6 "

Italian Engineers engaged on highways

(c) None on highways - one on hydraulics

(d) List of Contractors

None directly employed

AGEA Employ on water works

S.A.Lavori Idraulici Travaglia Augusto - Via del boschetto 13

Impresa Acidaro Arturo - Via S.Gallicano

Metano Roma

Impresa Ing. Di Penta - Via del Babuino % 50

Marcia employ on water works

Ditta Meloni - Via Assisi 29

Ditta Santini - Via S.Andrea delle Fratte 28

Travaglio Augusto - Via del Boschetto 13

(e) List of Sources and of construction materials

Cemento - Cementificio di Guidonia

Timber - Via Nicola Passeri 4

Pipes - Azienda del Governatorato di Roma

Coke Gas - Officine Gas S.Paolo Roma

Coke metallurgico Spolettificio

1) Via Flaminia- Ingresso Via Guido Reni.

2) OfficinaContini Via Tiburtina

BARS ROUND REINFORCING

can be obtained from the two new buildings being constructed on Via Elena.
Via Venti Settembre

THESE ARE URGENTLY REQUIRED

3) GASOLINE DUMP

Suggest taking over a filling Station

2375

128A

Exterior Gas point (was previously used by French Army)
Garage Via Margutta partly damaged, probably the two pumps are could be made serviable.

- 4) DINSTINCTIVE TRUCK MARKINGS
No Comments.

signed; Buckley - Major

2374

~~NOT
draft 29/8~~

~~FILE
062~~

~~Major Hodgkinson 20/8
passed to you please
ack~~

~~Col Dapper~~

~~Pls handle & advise
Col Rhodes 21/8~~

~~FILE
062~~

Director

See letter

FILE 062

49 -

17.5.44.

1. Because 100% is being paid to supplier, Co. - it does not follow, & all that 100% should be added (Consumers).

It is a specious argument.

2. I take it that Gen. Civ. one dealing with these now; in first instance.

3. To Lt. Col. Laffan, to frame a reply, to Property Control.

GER.

21/8.

18 AUG Recd

062 ccb.

PW & U
127
478

HEADQUARTERS

~~ALLIED MILITARY GOVERNMENT~~

REGION NO. 3.

ALLIED CONTROL COMMISSION
APO 394, US. ArmyOFFICE OF CONTROLLER OF PROPERTY
122, VIA FRANCESCO CRISPI

CP-3N17B

NAPLES,

15 August 1944

Subject : Compagnia Imprese Condotte di Acqua

To : Public Work & Utilities Sub-commission
HQ. A.C.C.

1. Reference your letter ACC/062/PWO dated 17 May 1944, copy to this office, subject Company has informed us that they consider that as the cost of its water supply is being surcharged 160% by the Acquedotto di Napoli, from whom all its water supply is obtained, the surcharge to its own consumers for the quarter ended 4 August 1944 should also be 160% instead of the 150% surcharge authorized for the preceding quarter in your letter.

2. In order not to delay sending out the bills, and because the company is badly in need of funds, this office has instructed the Company to prepare consumer's bills on the same basis as for the prior period, with the same safeguards as outlined in your letter above referred to.

3. May surcharges in future be made in respect of a period bases upon operating costs of the prior period, rather than delaying the sending out of bills until the actual running costs are determined.

4. Public Work & Utilities Section, Region 3, who has been contacted by this office, is of the opinion that the circumstances warrant application of the previous surcharge in order to avoid delay.

5. Confirmation by your Sub-commission is requested regarding immediate application of the previous

2373

HEADQUARTERS

~~ALLIED MILITARY GOVERNMENT~~

REGION No. 3.

ALLIED CONTROL COMMISSION
APO 394, US. Army

OFFICE OF CONTROLLER OF PROPERTY
122, VIA FRANCESCO CRISPI

NAPLES,

continued

rates and opinion is requested regarding the feasibility of adopting for the future a plan which would base current water rates upon operating costs of the period proceeding.

NHS/CdF

E.M. Gard
E.M. GARD
Lt. Colonel, R.A.
Controller of Property
Region 3



2372

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

OWA/BO

126

062
ACC/138/PWU

4 July 1944

Subject: Requisition of Calcium Hypochlorite for the
Acquedotto di Napoli.

To : Regional Engineer, Region III.

Ref. the attached copy letter AG 671 BPRNG dated
30 Jun 44 from P.B.S.

Please submit the requisition to P.B.S. as
requested in Para. 2.

GER.

Enc. c. letter 30 June.

G.E. RHODES,
Lieut. Colonel, R.E.,
Deputy Director.

~~31 F 11/7~~ File
4800
95


2371

125

FILE 062.1 Sept. 44.

Capt. Bender of "War Materials" Dept.,
Room 6, 3rd Floor, H.R. Acc., (Tel. Ext. 481),
informed me recently that about
500 cast iron, spigot and socket, pipes,
approx 5 ins. dia. and 5 metres long,
were lying near the Lago di Albano
at Map Ref. Sheet 17 - 1:200,000 - F8948.

They were probably put there for
laying a water main to the estate
of Conti Vannutelli.

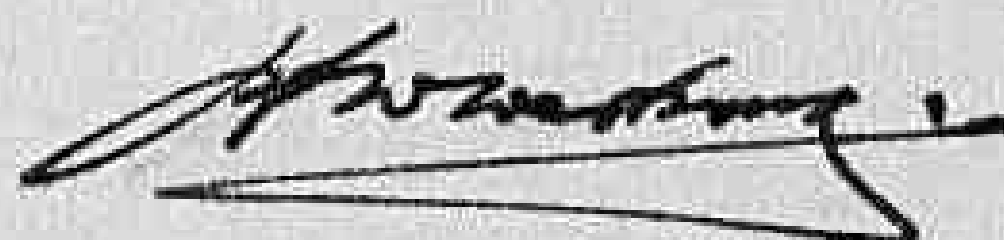

H. W. WESTBROOK
MAJOR, R.E.

2370

I gave the above info to Capt. Austin
of Commerce Sub-Commission on 1st Sep.



Tel. 489081

HW/ce

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
AFO 394

31 AUG 44

ACC/062/RHU

SUBJECT: Compagnia Imprese Condotte di Acqua.

Venizia - RESINA.

TO : Controller of Property, Region 3, A.C.C.

1. Ref. your letter CP-3N 17 B of 15 Aug 44.

2. It does not follow that the company should need to apply to its sales of water a surcharge at the same percentage as that which has been added to the purchase price paid by the company for the water that it distributes. The surcharge of 150% authorized in our letter of 17 May was determined after a careful examination of the operating expenses for the previous three years, and after special consideration of its accounts for the period Oct. 1943 to Mar. 1944. The surcharge allowed was a generous one and was made so with the object of enabling the company to build up a little surplus to cover unforeseen contingencies.

3. If the company desire a revision of the authorized provisional rate of surcharge it should submit to us a complete sworn statement of its operating expenses from 1st April until as recent a date as may now be practicable (probably 30 June).

4. We entirely agree that surcharges should be computed and authorized on the basis of operating costs in the preceding period. This is the principle that we have followed and it conforms to the statutory basis of billing. The surcharge authorized in our letter of 17 May was made retrospective to 4 Feb. 44 on the basis of operating expenses up to 31 March. The bills issued by the company on 4 May were calculated according to meter readings for the period 1 Nov. 1943 to 3 Feb. 1944, although those bills are regarded by the citizens as applying to the period 4 Feb. to 3 May 44. For the purpose of computing the surcharge, however, it was necessary to make use of the latest available data.

5. We confirm that in the absence of a further application and statement of operating expenses from the company, it was reasonable and quite in order to apply the existing rate of surcharge, viz. 150%, to the recent billing period. However, the company should submit a further application without delay.

6. Applications for adjustment of Utility rates are now technically examined in the first place by the Ministry of Public Works, which is required to submit its recommendations to this Headquarters for approval.

W.M. JAFFE

TO : Controller of Property, Region 3, A.C.C.

1. Ref. your letter CP-3N 17 B of 15 Aug 44.

2. It does not follow that the company should need to apply to its sales of water a surcharge at the same percentage as that which has been added to the purchase price paid by the company for the water that it distributes. The surcharge of 150% authorized in our letter of 17 May was determined after a careful examination of the operating expenses for the previous three years, and after special consideration of its accounts for the period Oct. 1943 to Mar. 1944. The surcharge allowed was a generous one and was made so with the object of enabling the company to build up a little surplus to cover unforeseen contingencies.

3. If the company desire a revision of the authorized provisional rate of surcharge it should submit to us a complete sworn statement of its operating expenses from 1st April until as recent a date as may now be practicable (probably 30 June).

4. We entirely agree that surcharges should be computed and authorized on the basis of operating costs in the preceding period. This is the principle that we have followed and it conforms to the statutory basis of billing. The surcharge authorized in our letter of 17 May was made retrospective to 4 Feb. 44 on the basis of operating expenses up to 31 March. The bills issued by the company on 4 May were calculated according to meter readings for the period 2 Nov. 1943 to 3 Feb. 1944, although these bills are regarded by the citizens as applying to the period 4 Feb. to 3 May 44. For the purpose of computing the surcharge, however, it was necessary to make use of the latest available data.

5. We confirm that in the absence of a further application and statement of operating expenses from the company, it was reasonable and quite in order to apply the existing rate of surcharge, viz. 150%, to the recent billing period. However, the company should submit a further application without delay.

6. Applications for adjustment of Utility rates are now technically examined in the first place by the Ministry of Public Works, which is required to submit its recommendations to this Headquarters for approval.

W.M. JAFFER,
Lieut-Colonel,
Chief, Util. & Adm. Div.
2369

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWB/bb

ACC/062/PWU

31 Aug, 44

SUBJECT: CHIETI Water Supply.

TO : Regional Engineer, HQ. Region V.

1. Documents relating to the above scheme were delivered to this office by Maj. Bennett.

2. The scheme having been examined and approved at the estimated cost of Lire 800,000 (involving the use of controlled materials), one copy of form ACC/1 is returned herewith duly countersigned.

3. Please submit form ACC/2 in triplicate as soon as practicable.


W. WESTWOOD MAJOR. R.E.


W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

Copy to file 108/PWU

2363

29 AUG Recd 062 *P.V.+U*

To : HQ ACC, Public Works and Utilities
Sub_Commission

From : Engineering Division, HQ AMG Region 51

Subject : Repairs to Castello, L'Aquila

Ref : R5/516/9

Date : 25 Aug. 1944

122

The n/m documents relating to this project
are enclosed:

- (a) Genio Civile's Estimate N3021 dated
19 Aug. 44.
 - (b) ACC/I (in triplicate)
 - (c) Letter dated 25 Aug. 44 authorising Genio
Civile to proceed.
- Retained by
me. 31/8*

The total value of the work is L. 24.000 and
no controlled materials are required.

FOR THE REGIONAL COMMISSIONER :

J. E. Foden
J. E. FODEN
Major
PUBLIC WORKS OFFICER
for REGIONAL ENGINEER.

2367

3180

ALLIED CONTROL COMMISSION
PUBLIC WORKS AND UTILITIES SUB-COMMISSION

Form ACC/I
(Estimate
Revised
7 June 44)

Estimate of Work to be carried out

Note: This form to be filled in triplicate; one copy to be retained in Sub-Comm. H.Q., File, one to be returned to the Regional Engineer when approved, and one to be sent to the Minister of Public Works.

ESTIMATES - CAPITAL EXPENDITURE

(APPROVALS)

- I. (a) Building, Bridge, Road, Power
Stn, Pumping Stn etc, and location Aquila: Building "Castello"
Repair of the hydraulic plan. (B 510168). Plumbing & Drainage)

(b) By contract or direct labour by contract

(c) Amount of approximate estimate L. 24.000

(d) Urgency of project very urgent

(e) Probable time for completion one month

(f) Special remarks No controlled materials required.

2. Certificates:

- (a) Certified that the attached approximate estimate amounting to
Lire 24.000,00 (twentyfour thousand)
has been prepared by me; it covers the full requirements of the project,
and is reasonable in amount.

Italian
Engineer

Signature

Official designation Chief Engineer

Compartimental Inspector

Date, and place 19 August 1944

23 August 1944

- (b) I agree with the preceding certificate and recommend approval.

Date

(APPROVALS)

I. (a) Building, Bridge, Road, Power
Stn, Pumping Stn etc, and location Aquila: Building "Castello"
Repair of the hydraulic plan. (B 510168). Plumbing & Drainage

- (b) By contract or direct labour by contract
- (c) Amount of approximate estimate L. 24,000
- (d) Urgency of project very urgent
- (e) Probable time for completion one month
- (f) Special remarks No controlled materials required.

2. Certificates:

- (a) Certified that the attached approximate estimate amounting to
Lire 24,000,00 (twentyfour thousand)
has been prepared by me; it covers the full requirements of the project,
and is reasonable in amount.

Italian Engineer	{	Signature	<u>Bruno</u>
		Official designation	<u>Chief Engineer</u>
		Date, and place	<u>19 August 1944</u>
			<u>23 August 1944</u>

- (b) I agree with the preceding certificate and recommend approval.

3. Approved.

(Highway Fund)
(Other funds)

W. 308

2368
Chief, Public Works Div. P.W.D. U. Sub-Comm. ACC.

4. Approved.

Director, P.W.D. U. Sub-Commission A.C.C.

Approved by [Signature] 23/8/44

MC/gb

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

22 August 1944

TO : Ispettore Generale Compartimentale
del Genio Civile per il Lazio & Umbria,
ROMA, Via Monzambano 10

SUBJECT : Roma Province - works at Grottaferrata and Valmontone.

IN REPLY COUTE: RA/ENG/101.90, 96

1. Reference to your letters 1847 and 1861 dated 14th August 1944
2. Approval in principle of this Division is given to expenditures as follows:

GROTTAFERRATA - repair sewerage system	L. 330,000
VALMONTONE - repair civil houses	L. 504,000
3. ACC/1 copy signed in triplicate and all documents forwarded with are returned in duplicate.
4. After approval has been given from Ministry, final approval of E.C. ACC; (P.W.U.) will be necessary.

A.S. Evans

A.S. Evans, Major R.E.

22 August 1944

TO : Ispettore Generale Compartimentale
del Genio Civile per il Lazio & Umbria,
ROME, Via Montebello 10

SUBJECT : ROMA Province - works at Grotteferrata and Valmontone.

IN REPLY COURTES: 24/ENG/101.90, 95

1. Reference to Your letters 1847 and 1861 dated 14th August 1944
2. Approval in principle of this Division is given to expenditure as follows:

GROTTAFERRATA - repair sewerage system	L. 330,000
VALMONTONE - repair civil houses	L. 504,000
3. ACC/1 duly signed in ~~duplicate~~ and all documents forwarded with are returned in duplicate.
4. After approval has been given from Ministry, final approval of H.Q. ACC: (P.W.U.) will be necessary.

A. G. Evans

A.G. EVANS, Major R.E.
for Regional Engineer ACC IV. (PW)

Enclosures : 2 forms ACC/1.

Copy to:

→ H.Q. ACC (Public Works and Utilities Sub-Commission)
Provincial Commissioner of Rome Province.

2365

*Noted (a)
ACC/1
1/10/44
24/8*

EC/63

HEADQUARTERS REGION IV
Allied Control Commission
APC 324

22 August 1944

TO : Ispettore Generale Compartimentale
del Genio Civile per il Lazio e l'Umbria,
R o m a , Via Marmadamo 10

SUBJECT : Repair acqueducts in Rome Province.

IN REPLY QUOTE : 24/EMC/101.97, 98

1. Reference to your letters 1859 and 1862 dated 14th August 1944.
2. Approval in principle of this Division is given to expenditures as follows:

ALBAIO - GINEZANO - ARICCIA - allacciamento sorgenti "fasciato di Mami" 1,000,000	L.
ROCCA DI BARI - ripristino dell'acquedotto	440,000
3. ACC/1 duly signed in triplicate and all documents forwarded with are returned in duplicate.
4. After approval has been given from Ministry, final approval of H.Q. ACC. (P.W.U.) will be necessary.

A. G. Lano.

A. G. Lano, Major R. E.

SUBJECT: Repair acquedotto in Rome Province.

IN REPLY QUOTE: R4/ACC/101.97, 98

1. Reference to your letters 1859 and 1862 dated 14th August 1944.

2. Approval in principle of this Division is given to expenditures as follows:

ALBANO - GRYZANO - ARICCIA - allacciamento sorgenti "facciate di Nemi" 1,000,000 E.
ZOCOLA DI PAPA - ripristino dell'acquedotto 440,000

3. ACC/1 duly signed in triplicate and all documents forwarded with are returned in duplicate.

4. After approval has been given from Ministry, final approval of H.C. ACC. (P.M.U.) will be necessary.

A. G. Evans

A.G. EVANS, Major R.L.
for Regional Engineer ACC IV(PW)

Enclosures: ~~2~~ 2 forms ACC/1

Copy to:

→ HQ2ACC (Public Works and Utilities Sub-Commission)
Provincial Commissioner of Rome Province.

2364

*Recd
21/8*

Tel :489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

file
119
HWW/bb

ACC/062/PWU

Aug 30th 1944

SUBJECT : SIMBRIVIO Water Supply.

TO : Regional Engineer, HQ. Reg. IV
(attn: Maj. Evans)

1. Ref. your letter R4/ENG/101.1 dated 24 Aug. 44.
2. One copy of each of the forms ACC/2 enumerated in your letter is returned herewith, duly approved and countersigned.

W.M. Lapper
W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

Enc: 2 forms ACC/2

2363

Tel: 489081

HEADQUARTERS

ALLIED CONTROL COMMISSION

Public Works and Utilities Sub-Commission

APC 394

HWU/tr

ACC/062 / PWU

29 AUG, 44

SUBJECT : CAPESTRANO : Repair of water works.

TO : Ministry of Public Works .
(Attn: Comm. Tizzano.)

Forwarded herewith for your information is a copy of Form ACC/1, approving the above named scheme of an estimated cost of Lire 205,000.--

L.A. JENNY,
Lt. Colonel C.E.
Director

Copy to File ~~ACC~~ 108

Encl : Form ACC/1

Tel: 489081

HEADQUARTERS

ALLIED CONTROL COMMISSION

Public Works and Utilities Sub-Commission

APC 394

HWW/tr

ACC/062 / DWU

29 Aug, 44

SUBJECT : CARPESIRANO : Repair of water works.

TO : Ministry of Public Works .
(Attn: Comm. Tizzano.)

Forwarded herewith for your information is a copy of Form ACC/1, approving the above named scheme of an estimated cost of Lire 205,000.-

L.A. JENNY,
Lt. Colonel C.E.
Director

Copy to File ~~ACC~~ 108

Encl : Form ACC/1

2361

Tel: 489081

HEADQUARTERS

ALLIED CONTROL COMMISSION

Public Works and Utilities Sub-Commission

APO 394

HWH/tr

ACC/062/PWU

28 Aug 44

SUBJECT : CAPESTRANO- repair of water works.

TO : Regional Engineer, HQ. Region V.

1. Ref. your letter R5/516/9 of 21 Aug 44 .

2. The above named scheme has been reviewed and approved at the estimated cost of Lire 205,000 . One copy of the Form ACC/1 and one copy of the Form ACC/2 are accordingly returned to you herewith, duly counter-signed.

3. It is presumed that you approve of the decision of the Genio Civile to execute the work by Direct Labour.

4. We note that the small amount of controlled materials necessary can be found and released locally.

5. Your explanation why the works ~~are~~ ^{were} started without the approval of this HQ. is also noted and accepted. Moreover, we appreciate the action that you have taken to regularise the matter.

W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

Enclosures : ACC/1

List of Controlled Materials

ACC/2

26 AUG 1944

PW4 U.

1380

File 062

115

HEADQUARTERS REGION IV
Allied Control Commission
Engineering Division
APO 394

24 August 1944

TO : ACC HQ, Public Works and Utilities ✓

SUBJECT: Simbrivio - Water Supply

FILE N°: R4/ENG/101.1

Reference my R4/ENG/101.5 of 14 August 1944.

1. In accordance with your Instruction N° 4 following ACC/2 are forwarded in triplicate:-

Construction of steel trussed gated across River Aniene	£ 590.000
Repairs to aqueduct	£ 800.000
	<u>£ 1390.000</u>

2. These two contracts are placed under your original authority for expenditure of £ 1.775.000 -

Enclosures:- 6 ACC/2



A.G. Evans
A.G. EVANS, Major R.E.
for Regional Engineer ACC.IV.

By Col. Dapper
where is the steel coming from.
Reg. Engineers should leave
space for our signatures

Maj Westwood

The contractor was set to work on
this urgent project because he had the
steel available.

26/8

29/8

2359

22 AUG Recd

1st. Ind. *062*

CU-966

Regional Engineer, Region Three. A.P.O. 394. 21 August, 1944

TO : Public Works and Utilities Sub-Commission.

1. Basic request of the

Società Italiana per Condotte d'Acqua

at Salerno, is attached hereto for review and approval.

LJH/dp.

LESTER J. HENSLEY

Lt. Col. C.E.,

Regional Engineer Officer
Region 3.

For necessary action

23/8

*May' bestwood**Pass to Ministry P.P.W.
at Sci. Team, phase**may*

2353

Società Italiana per Condotte d'Acqua
at Salerno, is attached hereto for review and approval.

LJH/dp.

Lester J. Hensley
LESTER J. HENSLEY
Lt. Col. C.E.,
Regional Engineer Officer
Region 3.

Col. C. E. Hensley

For necessary action
23/8

Chas. Kentwood

*pass to Ministry of P. & W.
at Sir Edmund, please*

hnd

I have written a letter accordingly.

2353

27 Aug.

Chas. Clark

File - 062

ALLIED CONTROL COMMISSION

SALERNO PROVINCE

Salerno, 18/8/1944.

SUBJECT :- Water Prices

ANG/S/17/1

TO :- Public Works and Utilities H.Q. A.C.C. Region 3

From :- Public Works and Utilities Salerno Province

Enclosed is a request for authority to increase water prices. The situation is such that this office has authorised a provisional increase of 100 % as from 1st August 1944 subject to eventual approval from Higher Authority.

The Water Company have been advised that in the event of non-approval or approval of an increase of less than 100% they will have to make the necessary re-adjustments.-

L.R. Denning

L.R. DENNING

Major R.A.

i/c Public Works and Utilities
Salerno Province

2357

Società italiana per condotte d'acqua



Anonima fondata nel 1880 - Capitale sociale ^{L. 5.000.000} ~~L. 10.000.000~~ versato

SEDE IN ROMA - VIA DI PROPAGANDA 3

DIPLOMI D' ONORE
ESPOSIZIONI

*Torino 1884 - Palermo 1892
Roma 1894 - Perella 1913 - Roma 1921*

Indirizzo telegrafico: CONDOTTE - ROMA -

Telefono interpret: N° 60-203

Salerno, 18/8/1944

N° 371

AL SIGNOR MAGGIORE DENNING
Ufficio Servizi Pubblici A.M.G.

S A L E R N O

Con riferimento al nostro colloquio di ieri, ci preghiamo rimetterVi in copia la pratica da noi avanzata al Ministero dei Lavori Pubblici fin dal 7 aprile c.a. per ottenere l'adeguamento dei prezzi di vendita dell'acqua al maggior costo della mano d'opera e dei materiali per l'esercizio e la gestione dell'Acquedotto di Salerno.

Poichè nonostante le nostre continue premure non siamo ancora riusciti ad ottenere l'aumento richiesto, date le nostre disagiate condizioni finanziarie, che non ci consentono di far fronte ulteriormente alle forti passività di bilancio, Vi preghiamo vivamente di volerci autorizzare con la maggiore possibile sollecitudine, ad applicare, sia pure in via provvisoria, l'aumento richiesto del 189.39% su tutti i prezzi contemplati dal Regolamento in vigore per la distribuzione dell'acqua nel territorio amministrativo della Città di Salerno, regolamento che pure alleghiamo in copia.

Restiamo in attesa di Vostre comunicazioni in merito ed ossequiamo distintamente.

Allegati: 4

UFFICIO ESERCIZIO ACQUEDOTTO DI SALERNO

Il Capo dell' Ufficio
(Ing. Lorenzo Spila)

2356

Spila

Tel: 489081

HEADQUARTERS
 PUBLIC UTILITIES COMMISSION
 Public Utilities Sub-Commission
 APO 334

11/13/44

28 AUG, 44

ACC/062/PWU

SUBJECT : Water Rate Adjustment - Esercizio Acquedotto
 di Salerno (Società Italiana per Condotte
 d'Acqua).

TO : Ministry of Public Works
 (Attn: Comm. Tizzano).

1. For your attention, we send to you with this letter the following documents: -

- (a) A copy of the letter which the above named company addressed to the Ministry of Public Works on 11 May, 44.
- (b) Ditto, dated 15 June, 44.
- (c) Completed "questionnaire".
- (d) A copy of the forecast of the Company's Balance sheet for 1944.

2. Will you please review this renewed application and submit your recommendations to this Sub-Commission without delay.

3. Owing to the urgency of the matter, our Public Works Officer at Salerno has provisionally authorized an increase of 100% with effect from 1st Aug '44, on the understanding that should the eventually authorized surcharge be less than 100% the Company will be required to make appropriate adjustments in its subsequent bills.

TO : Ministry of Public Works
(Attn: Comm. Ticeano).

1. For your attention, we send to you with this letter the following documents: -

- (a) A copy of the letter which the above named company addressed to the Ministry of Public Works on 11 May, 44.
- (b) Ditto, dated 15 June, 44.
- (c) Completed "questionnaire".
- (d) A copy of the forecast of the Company's Balance sheet for 1944.

2. Will you please review this renewed application and submit your recommendations to this Sub-Commission without delay.

3. Owing to the urgency of the matter, our Public Works Officer at Salerno has provisionally authorized an increase of 100% with effect from 1st Aug '44, on the understanding that should the eventually authorized surcharge be less than 100% the Company will be required to make appropriate adjustments in its subsequent bills.

L.A. JANNI,
Lt-Colonel, C.E.
Director

Copy to Reg. Eng. HQ. Reg. III.
(Ref. his CU-966 of 21 Aug).

2355

To: HQ.ACC.PW. and U Sub-Commission
From: Eng. Div. HQ. AMG. Region 5
Subject: Water-Supply Ancona Pesaro and Perugia
Ref: R5/510/3
Date: 14 Aug. 1944

Ref: your ACC/062/PWU dated 10 Aug. 44.

The application of Dr. Ing. Francesco Mazzuca to circulate in Perugia, Ancona and Pesaro Provinces should be referred to AMG 8 Army and is returned accordingly.

FOR THE REGIONAL COMMISSIONER

J. E. FODEN

MAJOR


PUBLIC WORKS OFF.

FOR REGIONAL ENGINEER

Act Col Rapper

For action

Dec. 20/8

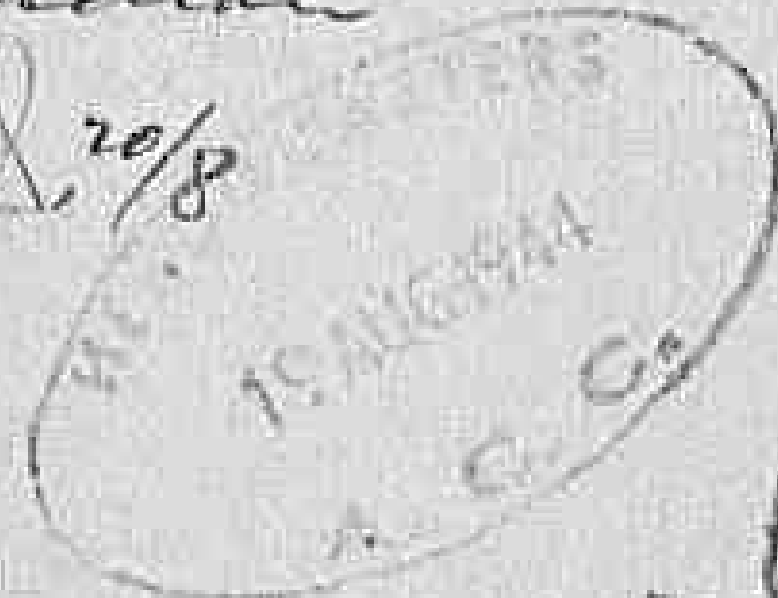

*Action taken
Col. Rapper
instructions.*

22 Aug

235/1973

MATERIALI SPECIALI PER L'EDILIZIA

DR. ING. FRANCESCO MAZZUCA

MILANO U. P. C. N. 253047

August, 4th 1944

C/C POSTALE N. 1/23920

ROMA
TEL. 44062 - VIA FIRENZE 50

Mr. Findlay

HQ

ACC APO 394

room 73

ROMA

25 c.d'Italia

Subject: Municipal or Genio Civile-potable water pipe
lines-our maintainance & construction service.-

Please kindly note that we are responsables of
the service, maintainance & construction of the munici-
pal or Genio Civile potable water pipe lines in the
towns as shown in herewith enclosed Map & List.-

We stopped all above mentioned works on September
8th, 1943 and we left this country; but now we think our
duty to report immediately - as soon as possible - to
Municipal and Genio Civile Authorities.-

Therefore, in order to save time, we are asking
you for giving us a circulating permit to travel from
Rome to the towns as shown in herewith enclosed Map &
List, when occupied by Allied Forces. (It. l Valfabbrica (w)
was already occupied).-

We think that journey purpose is of direct benefit
to the allied cause.-

Yours faithfully

Encls: Map
List
References
Return envelope

Dr. Ing. FRANCESCO MAZZUCA
VIA FIRENZE 50 - ROMA.

Mazzuca 2353

Vs. RIF.

Ns. RIF.

Impermeabilizzazioni
Terrazzo - Pareti
Dighe - Serbatoi
Feltre - Mastici - Idrofughi
Protezioni jgnanti

Vetrocemento
Mattoni diafani
Lucernari
Portavetri in cemento

Strutture acustiche isolanti
Assorbenti - Riverberanti
Placche percolanti
per schermi acustici
Guarnizioni antivibranti

Isolazioni termiche
Ignifughi

Vernici luminescenti

M A P

Encl :

For tick numbers in red circles, see LIST encl.



Progr. int. artistico letteraria

ISTITUTO GEOGRAFICO DE AGOSTINI-NOVARA
di Cesare Rossi e dott. A. Marco Biondi

Dr. Ing. FRANCESCO MAZZUCCA

PESARO

CASELLA POSTALE N. 79

MATERIALI SPECIALI PER EDILIZIA

DR. ING. FRANCESCO MAZZUCA

MILANO U. P. C. N. 253647

C/O POSTALE N. 1123926

ROMA
TEL. 44062 - VIA FIRENZE 30

L I S T

Water pipe lines.- Our construction & maintainance .-
(for items, see MAP encl.)

Municipal (m) , Genio Civile (gc) water pipe lines in
service (s) or under construction (c) , up to September
8th , 1943.- Warehouse(w) .-

Impermeabilizzazioni

Terrazze - Pareti

Dighe - Serbatoi

Feltre - Mastici - Idrofughi

Protezioni sogname

Vetrocemento

Mattoni d'isanti

Lucernari

Portaveltri in cemento

Strutture acustiche isolanti

Assorbenti - Riverberanti

Placche percolanti

per schermi acustici

Guarnizioni antivibranti

Isolazioni termiche

Ignifughi

Vernici luminescenti

- | | |
|-------|---------------------------------|
| It. 1 | Valfabbrica (w) |
| " 2 | Serra S. Abbondio (w) |
| " 3 | Frontone (w) |
| " 4 | Cagli (w) |
| " 5 | Belforte all'Isauro (m) (c) |
| " 6 | Piandimeleto (gc) (c) |
| " 7 | Lunano (gc) (s) |
| " 8 | Farneto (gc) (c) |
| " 9 | Scavolino di Pennabilli (m) (c) |
| " 10 | Mercatino Conca (gc) (s) |
| " 11 | Montegrimano (gc) (s) |
| " 12 | Sasso Feltrio (gc) (s) |
| " 13 | Pesaro (w) |
| " 14 | Rimini (w) |

Vs. RIF.

Ns. RIF.

Encl :

2353

MATERIALI SPECIALI PER EDILIZIA
DR. ING. FRANCESCO MAZZUCA

MILANO U. P. C. N. 253047

C/C POSTALE N. 123020

ROMA
TEL. 44002 - VIA FIRENZE 50

REFERENCES

Impermeabilizzazioni

Terrazze - Pareti

Dighe - Serbatoi

Feltri - Mastici - Idrofughi

Protezioni segnami

Francesco Mazzuca - Tommaso & Ferranti Giulia son -
Single- Age 37 -

Adresse : Roma , 50 v. Firenze.-

Vetrocemento

Mattoni diafani

Lucernari

Portaveltri in cemento

1930 - graduated Civil Engineer
1931 - 1934 - Standard Elettrica Italiana Milano
associated of the INTERNATIONAL

STANDARD ELECTRIC Co. NEW YORK

: employed

1935-1943 - MINISTERO LAVORI PUBBLICI

: contractor

Strutture acustiche isolanti

Absorbenti - Riverberanti

Piacche percolanti

per schermi acustici

Guarnizioni antivibranti

French or English correspondence

Isolazioni termiche

Ignifughi

Further informations at your disposal.-

Vernici luminescenti

VS. RIF.

NS. RIF.

2350

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
AFU 394

L.A.J/ee.

ACC/062/PWU

24 Aug 44

SUBJECT: Extension of Water Supply for
Clampino Airport.

20 : Regional Engineer, Region IV.

1. I am forwarding to you correspondence received from Lt. Col. Birchett regarding water requirements in the vicinity of the Clampino Airport, submitted by Capt. McClearn. This report should have gone to you for investigation and recommendation to this office as we do not accept any request for any work, unless passed on by the Regional Engineer.

2. After looking into this matter, and if you are satisfied that this extension to the water system should be made, will you please prepare the necessary forms to be submitted to this Headquarters for approval through Italian channels. This is a territory controlled by the Italian Government and all projects, except military highways, must go through Italian Channels.

encl.

L.A. JENNY,
Lt-Colonel, C.E.,
Director.

Copy to: Lt. Col. C.R. Birchett, Rome.

2379

8 24 AUG 1944 062
P.W. + U.
110-

TO : HQ, AOC; Public Works and Utilities
Sub-Commission.

From : Engineering Division, HQ, AMG Region 5.

Subject : Capestrano; Repair of Water Supply System

Ref : R5/516/9.

Date : 21 Aug. 1944.

AMG Territory

By Col. Happer
His review and
act *25/8*

The m/m documents which relate to the above project are enclosed:

- (a). Description of project dated 14 July 44.
- (b). Estimate dated 14 July 44.
- (c). Forms AOC/I and AOC/2 (in triplicate) with covering letter dated 14 Aug. 44.

The total value of the project is L 205,000 and work was commenced on instructions of the Provincial Commissioner, Aquila, before this Division moved in. His action is approved and the scheme is now submitted to you to regularise the position.

The requisite cement was ^{un}formed locally and released by the P.C. The remaining controlled materials are very small; in quantity and can also be formed locally.

FOR THE REGIONAL COMMISSIONER:

J. E. Foden
J. E. FODEN
Major.

PUBLIC WORKS OFFICER 2348
for REGIONAL ENGINEER.



Maj. Greenwood

Mr. L

25/8

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWG/tr

ACC/052/PWU

21 Aug, 44

SUBJECT : Rosinone Province- Repair of water supply
of S. Apollinare .

TO : Regional Engineer, HQ. Region IV, ANG/ACC.
(Attn: Lt. Col. Findlay.)

1. Ref. your letter R4/ENG/101.67, of 14 Aug 44.
2. The scheme having been reviewed and approved by this HQ. at the estimated cost of Lire 4,000,000, one copy of Form ACC/1 is returned herewith, duly countersigned.
3. We also enclose one copy of the list of controlled materials, as requested. Necessary action to obtain release of these materials will, of course, be initiated by you in accordance with the prescribed procedure.
4. There are a few errors in the estimate but we do not consider that they are of sufficient magnitude to warrant an alteration in the "rounded" total.
5. Please submit Form ACC/2 in triplicate as soon as possible.

W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

2347

FILE 062

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

AGE/sc.

14th August 1944.

TO : HQ. ACC. (Public Works & Utilities Sub-Commission). ✓
SUBJECT: FROSINONE Prov. - repair aqueduct of S. APOLLINARE
FILE NO: R4/ENG/101.67

1. Enclosed is Form ACC/1 in triplicate, please return in duplicate with approval (£. 4.000.000.-).
2. Enclosed is list of controlled materials two copies please return one.
3. Enclosed is copy of following for retention by you:
Relazione.
Stima.
Plans.
4. Remarks: Some of the rates in estimate are recognizably high. In general, however, the work is scattered in small pieces over a wide area and the estimate in toto is not considered excessive.
In view of the urgency of the situation in this area work is already in hand as a Single Tender.

A. S. Egan

Maj. R.E.
for Regional Engineer ACC IV (P.W.)

Number of Enclosures: 8.

Copy to Genio Civile FROSINONE for information.

Office record
of zone ACC/1
data, notations
by me. 21 Aug.

Deal 2348
1/11/44
21 Aug.
FILE

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission

ACC/tr

ACC/062/PWU

21 Aug. 44

SUBJECT : Frosinone Province-Repair of water supply of
S. Apollinare .

TO : Ministry of Public Works .
(Attn:Comm.Fizzani).

1. We send to you with this letter a copy of
Form ACC/1 , approving the above named scheme at an esti-
mated cost of Lire 4,000,000.

2. Will you please arrange to make available the
necessary funds.

L.A.JENNY,
Lt-Colonel C.E.,
Director .

Copy to Regional Engineer, HQ.Region IV.
(Attn:Lt.Col.Findlay.)

2345

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WML/cc

ACC/062/PWH

21 Aug 44

SUBJECT: Supply of water to Lipari Islands.

TO : AFHQ G-5 Sec. Economics & Supply Division.

1. Ref. Your letter P 15, dated 17 August 1944 and attachments thereto.
2. The supply of water to Lipari Islands has been discussed with Lt. Col. Ramsey who was until recently Provincial Commissioner and made all arrangements for the water supply of these islands.
3. He states that the "Laguna", a 300-ton boat was raised out of the Messina harbour about a month ago for the express purpose of carrying water to these islands.
4. The boat takes about 300 tons of water every 2 weeks and this is pumped into storage tanks from which the water is issued on a rationed basis to the 20,000 inhabitants of these islands.
5. Lt. Col. Ramsey is quite emphatic that the matter could not be dealt with by using water cans and that the main body of the water is used for domestic drinking and cooking purposes.
6. It is suggested that some release be made by the boat making a trip once a month instead of once every 2 weeks if sufficient quantity of water can be carried to meet the islands' requirements. The storage tanks on the islands have a capacity of 600 tons which would meet the monthly consumption.

W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div.

2344

SECRET 19 AUG Recd

ALLIED FORCE HEADQUARTERS
G-5 Section
APO 512

062
CCB
P. Works & Utilities

FHL/jm

Ref. P-15

17 August 1944

SUBJECT: Supply of Water to Lipari Islands

TO : Headquarters, Allied Control Commission, APO 394
(Attn: Executive Director, Economic Section)

Your reply to the attached is requested urgently.

Fred K. H. Lewis
FRED K. H. LEWIS
Lt. Colonel, AUS

Economics & Supply Division

2 Incls:

1. Letter from G-4(M&Tn) to Q(Maint) dated 11 Aug 44
2. Buckslip from Q(Maint) to G-5 dated 15 Aug 44

Col Rapp

WAS, 17/8/44

*Suggest Col Bolick
look into this as there
are just 11 of Sicily and
he may be familiar with
this*

234

SECRET

SECRET

ALLIED FORCE HEADQUARTERS
G-5 Section
APO 512

FHL/jm

107c

Ref. P-15

17 August 1944

SUBJECT: Supply of water to Lipari Islands

TO : Headquarters, Allied Control Commission, APO 394
(Attn: Executive Director, Economic Section)

Your reply to the attached is requested urgently.

FRED'K. H. LEVIS
Lt. Colonel, AUS
Economics & Supply Division

2 Incls:

1. Letter from G-4(MAIn) to
Q(Maint) dated 11 Aug 44
2. Buckslip from Q(Maint) to
G-5 dated 15 Aug 44



2342

SECRET

SECRET

COPY

COORDINATING ROUTE SLIP
Staff Minute Sheet
ALLIED FORCE HEADQUARTERS

SECRET

107B

File No. AFHQ/3002/Q(Maint).SUBJECT: Supply of Water to LIPARI ISLANDS.

No. From To Date

1 Q(Maint) G-5 15/8

Reference attached copy letter G-4(M&Tn) 5/47/GDM dated 11 Aug 44 received from G-4 (Mov & Tn).

1. It is understood that the supply of water to the LIPARI Islands is a commitment primarily in respect of the civil population.

2. To enable the present water carrier to be released for Naval and Merchant Naval requirements elsewhere, palliccans (4 gallon petrol cans) no longer fit for the carriage of petrol can be made available to meet the above-mentioned commitment for water to the LIPARI Islands. These cans would not be suitable for the carriage of drinking water owing to rust and petrol contamination. A limited number of 2 gallon water cans could, however, be released but not in sufficient quantity to meet the demand of 25 tons of water per day.

3. It is requested, therefore, that you state the minimum daily requirement of drinking water and whether, if the whole of the 25 tons per day was transported in palliccans, arrangements could be made for the purification of the water for drinking purposes on arrival in the Islands.

/s/

W.J. BARNISH, Major,
for Major-General,
G-4(B).

every 2 weeks

Logbook 300 Tons per day
of water of drinking water and the
need during the past month

Tanks 2341

SECRET

SECRET

107
A

C O P Y

ALLIED FORCE HEADQUARTERS
(G-4 MOV & TN)

S E C R E T

G-4 (M&Tn) 5/47/GDM

11 Aug 44.

Subject:- Supply of Water to
LIPARI Islands.

TO : Q (Maint).

1. The supply of water to the LIPARI Islands (approx 25 tons per day) is now being undertaken by a water carrier based on MESSINA. This water carrier is considerably larger than is necessary, and is urgently required to assist with Naval and Merchant Naval water requirements elsewhere.
2. In order to release this vessel for such service, it is urgently requested that water containers be provided from Military sources to enable this commitment to be met by schooners.
3. Please treat this matter as urgent.

(Sgd.) D.A. GREENHILL, Col.
for Brigadier,
D.Q.M.G. (M)

DAG/vw

Copy to: D.O.S.
D. Works
Pet Sec
F.E.O.
D.O.H.C.
M.W.T.R.
P.S.T.O. Med.

2348

SECRET

18 AUG 1944
062 C.

106-

HEADQUARTERS
ALLIED CONTROL COMMISSION FOR SARDINIA
REGIONAL OFFICE OF TRANSPORTATION AND PUBLIC WORKS

Cagliari, 15 August 1944.

Subject: CAGLIARI Water Supply.

To : HQ/PWU Sub-Commission, A.P.O. 394.

(Attention Lt. Col. Lapper, Chief, Util. & Adm. Div.)

Ref : ACC/O62/PWU, 9 August 1944

1. A complete report on the water situation at Cagliari was prepared for the Regional Commissioner, Region VI, as of date of 20 July, 1944.
2. A copy of the above-mentioned report is enclosed, with comment made subsequent to date of report, and with calculations completed to 14 August, 1944.
3. A recent complication to the situation as outlined in the report has been occasioned by a demand for more hours of service to the 60th Station Hospital, which is on the Corongiu service. The importance of water to the Hospital has been intensified by the results of operations in Southern France. It seems probable that, to compensate for additional water to be made available to the Hospital, greater restrictions will be necessary elsewhere.
4. Upon receipt of figures of water elevations of reservoirs, (usually received Wednesdays), further tabulated information will be forwarded to HQ/PWU.

For the Regional Commissioner,

Edward E. Smith
Edward E. Smith
Captain, S.R.
Regional Engineer

2339

X much too detailed, but
Major Westwood should
see
signed the letter
9/8

CRB
18/8

*may be forwarded
by post
19/8*

①
LV. Col. Jones

noted the 19/8

②
LV. Col. Lapper

HEADQUARTERS
ALLIED COMMISSION FOR SARDINIA
REGIONAL OFFICE OF TRANSPORTATION AND PUBLIC WORKS

Cagliari, 20th July 1944.

To : Regional Commissioner.

Subject : Report on Shortage of Water Supply to City of Cagliari.

Reference: DR/1313.

1. Chronological Sequence of Actions.

11 July - Letter from Sindaco requesting water conservation addressed to all units of consumption. (received by Cagliari's Province sometime after 12 July)

11 July - Publication of notice in "Unione Sarda" of order of Sindaco confirmed by Giunta that water be shut off daily beginning 11 July between 2000 and 0600 hours. Capt. Smith, notified by Brig. Carr of such notice, requests and obtains delay in effective date of order. On orders from Brig. Carr, notifies Major Smith, Adjutant of A.G.S. who states that Major Roumage, Engineer for A.G.S. will consult with Capt. Smith.

12 July - Major Roumage takes up matter directly with Ing. Crespi. Capt. Smith learns from Municipio that shut-off order has been rescinded. Capt. Smith attempts repeatedly to talk or see Major Roumage (out of office and does not call back.) Lt. Col. Price expects to talk with Sindaco and Prefetto.

13 July - Capt. Smith again attempts to get in touch with Major Roumage who apparently is out of touch with his office making inspections of A.G.S. and other installations, and giving instructions for water conservation. A.G.S. Bulletin 24 issued, noting that water will be shut-off between 2000 and 0600 hours daily, effective 14 July 1944. A call to Ing. Crespi provides information that complete agreement has been reached between Major Roumage and Ing. Crespi and the High Commissioner according to Bulletin 24, A.G.S. Brig. Carr notes that A.G.S. were not consulted.

14 July - Capt. Smith visited by Major Roumage who discusses accomplished actions. Lt. Col. Price and Brig. Carr informed. Letter written by Prefetto to A.G.S. urging water conservation. Brig. Carr orders similar conservation by civil

1. Chronological Sequence of Actions.

- 14 July - Letter from Sindaco requesting water conservation addressed to all units of consumption. (Received by England Province sometime after 12 July)
- 11 July - Publication of notice in "Unione Carda" of order of Sindaco confirmed by Giunta that water be shut off daily beginning 11 July between 2000 and 0600 hours. Capt. Smith, notified by Brig. Carr of such notice, requests and obtains delay in effective date of order. On orders from Brig. Carr, notifies Major Smith, Adjutant of A.S.S. who states that Major Rounge, Engineer for A.S.S. will consult with Capt. Smith.
- 12 July - Major Rounge takes up matter directly with Ing. Crespi. Capt. Smith learns from Municipio that shut-off order has been recommended. Capt. Smith attempts repeatedly to talk or see Major Rounge (out of office and does not call back.) Lt. Col. Price expects to talk with Sindaco and Prefetto.
- 13 July - Capt. Smith again attempts to get in touch with Major Rounge who apparently is out of touch with his office making inspections of A.S.S. and other installations, and giving instructions for water conservation. A.S.S. Bulletin 24 issued, noting that water will be shut-off between 2000 and 0600 hours daily, effective 14 July 1944. A call to Ing. Crespi provides information that complete agreement has been reached between Major Rounge and Ing. Crespi and the High Commissioner according to Bulletin 24: A.S.S. Brig. Carr notes that A.C.C. were not consulted.
- 14 July - Capt. Smith visited by Major Rounge who discusses accomplished actions. Lt. Col. Price and Brig. Carr informed. Letter written by Prefetto to A.S.S. urging water conservation. Brig. Carr orders similar conservation by civil consumers to be directed by Prov. Commissioner to Municipal authorities. Letter written by Prefetto to Sindaco suggesting 4 steps to be taken by the City to conserve water other than shut-off.
- 15 July - A call to Ing. Crespi by Capt. Smith provides information that water was not shut-off as indicated in A.S.S. Bulletin 24 as of 14 July and will not be shut off until further notice. Ing. Crespi states that all leaks observed by Maj. Rounge have been corrected. An appointment at office of Ing. Crespi with Maj. Rounge and Capt. Smith set for Monday 17th July.
- 17 July - At conference between Ing. Crespi, Maj. Rounge, Capt. Price and Capt. Smith, it was agreed that a full discussion of water conservation would be called by the Sindaco at a later date. Maj. Rounge provides Ing. Crespi with 10 Itel's

soldier for waste and leak survey. Sindaco writes letter to Prov. Commissioner setting date for water conference Wednesday 19th July at 1100 hours.

- 18 July - Capt. Smith writes letter to Prefetto informing him that the A.G.S. has issued orders for water conservation detailed memorandum given to Meeting at office of Sindaco (detailed memorandum in Regional Commissioner by Capt. Smith.) Publication in "L'Unione Sarda" of regulations directing that water supply may be at full volume between 0800 and 1000 hours and be reduced by 25% between 1000 and 0800 hours. No indication provided as to methods of reduction.
- 19 July - Garden sprinkling forbidden but no inspection provided or penalties for non-compliance mentioned.

2. Factual Description of Water Supply of Cagliari.

There are two sources of water supply, both of excellent sanitary quality, both chlorinated at present.

- a) Domusnovas supply is derived from a large spring in rock of Grotta S. Giovanni thru 46 km of pipe of 275 mm diameter. Cagliari terminus in any of three super imposed head reservoirs in Castello. Delivery is - to high-head reservoir 1800 m c.d., to medium-head reservoir 3000 m c.d., to low-head reservoir 4200 m c.d. No restriction of flow is practicable for water conservation by valve closing or throttling as flowing spring water would spill to waste over entrance to conduit. Delivery at present to low-head reservoir for maximum use.
- b) Corongiu supply is derived from three storage reservoirs located on dammed Corongiu River, received to head reservoirs of Castello thru 26km of 600 m.m. pipe. Also supplies suburbs of Quartu, Monserrato, Pirri etc. Capacities and recent consumptions have been supplied by the City. As they are based on displacement measurements they are probably acceptable.

Capacity in m c.	First Lake	Second Lake	Third Lake	Total
790,440	550,000	3,600,000	4,940,440 (x)	

(x) Daily mean supply of 13,500 c.m. for 365d.

Holding	First Lake	Second Lake	Third Lake	Total
11 May 1944	790,000	500,000	1,700,000	2,990,000 (y)
7 July 1944	705,000	500,000	700,000	1,905,000 (z)

(y) At existing daily mean consumption of 16,800 will provide 183 days or until 7 Nov.

(z) At existing daily mean consumption of 22,000 will provide 87 days or until 2 Oct.

The city claims that the peak daily consumption of 22,000 observed by them as of 7th July has been reduced by 4,000 c.m.d. justification for the reduction by

2. Factual Description of Water Supply of Cagliari.

There are two sources of water supply, both of excellent sanitary quality, both chlorinated at present.

a) Domusnovas supply is derived from a large spring in rock of Grotta S. Giovanni thru 46 km of pipe of 275 mm diameter Cagliari terminus in any of three super imposed head reservoirs in Castello. Delivery is - to high-head reservoir 1800 m c.d., to medium-head reservoir 3000 m c.d., to low-head reservoir 4200 m c.d. No restriction of flow is practicable for water conservation by valve closing or throttling as flowing spring water would spill to waste over entrance to conduit. Delivery at present to low-head reservoir for maximum use.

b) Corongiu supply is derived from three storage reservoirs located on dammed Corongiu River, received to head reservoirs in Castello thru 26km of 600 m.m. pipe. Also supplies suburbs of Quartu, Monserrato, Pirri etc. Capacities and recent consumptions have been supplied by the City. As they are based on displacement measurements they are probably acceptable.

Capacity in m c.	First Lake	Second Lake	Third Lake	Total
	790,440	550,000	3,600,000	4,940,440 (x)

(x) Daily mean supply of 13,500 c.m. for 365d.

Holding	First Lake	Second Lake	Third Lake	Total
11 May 1944	790,000	500,000	1,700,000	2,990,000 (y)
7 July 1944	705,000	500,000	700,000	1,905,000 (z)

(y) At existing daily mean consumption of 16,800 will provide 180 days or until 7 Nov.

(z) At existing daily mean consumption of 22,000 will provide 87 days or until 2 Oct.

The city claims that the peak daily consumption of 22,000 c.m.d. observed by them as of 7th July has been reduced by 4,000 c.m.d. to 18,000 c.m.d. not giving any justification for the reduction by activities on their part. Major Roumange claims that such reduction in consumption has been entirely due to his efforts and by those of the City. If the present consumption rate of 18,000 c.m.d. is not reduced the Corongiu supply will fail by 19 October. The city states that it is necessary to reduce the daily mean draw from Corongiu to 12,000 c.m.d. to prolong the supply to 4 Dec. around which time rain and run-off collection might begin to increase the amount of water in storage.

3. Comment by Capt. Smith

Action by the city in publishing notices without consultation with A. C. C. has created confusion and embarrassment. The Allied Garrison of Sardinia has done its share in direct and considerable water conservation. The City has not attempted, of its own initiative, to obtain the slightest saving in water consumption by dealing directly with civilian or Italian Military water consumers. It is recommended that a short period be permitted the City to correct its own abuses among non-Allied consumers, following which the Regional Commissioner should decide proper further action.

Edward E. Smith

EDWARD E. SMITH
Captain S.R.
Regional Engineer

21/7/44

Questions on above by Regional Commissioner:-

- a) Do you agree that if these efforts do have this result we shall have a safe margin?
- b) When should a careful review of the situation again be made, i.e. how long can we effort to give the present efforts a trial?

MC

22/7/44

Answers to question by Regional Commissioner

- a) A safe margin will be provided if the average daily consumption is reduced to 12,000 c.m.d. as of 19 July. At the rate of 12,000 c.m.d. supply will last to 6 December.
- b) A ten day trial period should be sufficient to demonstrate the sufficiency of present methods of conservation. If daily consumption is not reduced to about 12,000 c.m. then restriction of hours is recommended. A review of the situation should be made not later than 28 July. Other suggestions by Regional Commissioner have already (21 July) been effected.

1. The Commanding General of the Presidio has issued orders to all Italian Units requiring:
 - a) Supervision of use of water by unit commanders
 - b) Prohibition of all vehicle washing
 - c) Prohibition of all irregularities in tapping of waterlines

The City of Cagliari is now making daily inspections of all irrigation use of water and shutting off all such as found. Reports of actions will be sent to A.C.C. daily.

Edward E. Smith
 EDWARD E. SMITH
 Captain S. R.
 Regional Engineer

21/7/44

Questions on above by Regional Commissioner:-

- a) Do you agree that if these efforts do have this result we shall have a safe margin?
- b) When should a careful review of the situation again be made, i.e. how long can we afford to give the present efforts a trial?

MC

22/7/44

Answers to question by Regional Commissioner

- a) A safe margin will be provided if the average daily consumption is reduced to 12,000 c.m.d. as of 19 July. At the rate of 12,000 c.m.d. supply will last to 6 December
- b) A ten day trial period should be sufficient to demonstrate the sufficiency of present methods of conservation. If daily consumption is not reduced to about 12,000 c.m. then restriction of hours is recommended. A review of the situation should be made not later than 28 July. Other suggestions by Regional Commissioner have already (21 July) been effected.

1. The Commanding General of the Presidio has issued orders to all Italian Units requiring:

- a) Supervision of use of water by unit commanders
- b) Prohibition of all vehicle washing
- c) Prohibition of all irregularities in tapping of waterlines

The City of Cagliari is now making daily inspections of all irrigation use of water and shutting off all such as found. Reports of actions will be sent to A.C.C. daily

2. The City of Cagliari has published in "L'Unione Sarda" of 21 July an ordinance providing penalties, limiting use of water to 21 litre per person and setting price for water consumed above lights, set at 10 times the normal price.

14. August. 1944.

EES/

1. By agreement between Brig. Carr at a meeting in the office of the Regional Commissioner on 3 August a letter (copy attached) was sent to the City of Cagliari authorizing daily suspension of water service between 2100 and 500 hours, effective 6 August.

2. Recent regular tabulation (copy attached) seem to demonstrate the efficacy of such water conservation methods as are now being practised. Further restrictions in water service may be found necessary at a later Date.

EES/

COMMISSIONE ALLEATA PER LA SARDEGNA
Ufficio Trasporti e Opere Pubbliche
=====

Cagliari 4/8/1944.

Ing. CRESPI
Ingegnere Capo del Comune di Cagliari
Servizio Acquedotti

- CAGLIARI -

e p.c.

Allied Garrison of Sardinia
(Att. Capt. PATES)

1. A seguito del colloquio scambiato il 3 Agosto con il Commissario Regionale - Commissione Alleata di Controllo - il Comune di Cagliari è autorizzato ad effettuare la chiusura dell'acqua potabile dalle ore 21 alle ore 5 a decorrere da domenica 6 Agosto.
2. Nessun rallentamento o sospensione dei provvedimenti in atto o in corso di attuazione, per la conservazione dell'acqua potabile potrà essere permesso.
3. Il rapporto giornaliero sulle perdite riparate sulla chiusura di diramazioni per orti e giardini, e sospensione di ogni eventuale consumo non legalmente autorizzato, dovrà continuare a pervenire a questo Ufficio, conforme a quanto già fatto nelle due precedenti settimane? Dovrà pure essere continuato a questo Ufficio, l'invio del rapporto settimanale sulla situazione invaso dei laghi di Corongiu e sul consumo medio giornaliero. E' stata considerata la necessità di dover in futuro, apportare ulteriori limitazioni alle ore di distribuzione in città mentre per quanto si riferisce alle frazioni di Cagliari, tale provvedimento potrà essere immediatamente attuato.

Per il Commissario Regionale

Edward E. Smith
EDWARD E. SMITH.
Captain S.R.
Ingegnere Regionale

CC. A.G.S.

Lt. Col. DOROS.

2335

**ESTIMATES OF WATER STORAGE AND CONSUMPTION
CORONGIU SUPPLY CITY OF CAGLIARI
CONSUMPTION**

Date	Total Storage	(Quantities in cubic metres)		
		Est. daily consumption	Supply sufficient for	or until
Capacity	4,940,440	13,500	365 days	continuous
11 May	2,990,000	16,800	180	7 Nov.
7 July	1,905,000	22,000	87	2 Oct.
27 July	1,417,638	17,500	81	16 Oct.
1 August	1,324,412	18,400	72	12 Oct.
7 August	1,110,114	19,050	60	6 Oct.
8 August	1,091,064	12,840	85	1 Nov.
14 August	1,011,264	13,300	76	30 Oct.
				233

[illegible]

105

Folio 0105 has been transferred in
File 063

2333

ALLIED MILITARY GOVERNMENT
INTER OFFICE MEMO

From:

SUBJECT:

FILE No.

TO:

194

P.W. & U.
062
C.C.B.
0-3/428
104
9946
AGE/sc.

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

14th August 1944

TO : ACC. Public Works & Utilities (Sub-Commission. ✓)
SUBJECT: SIMBRIVIO - Water Supply.
FILE NO: R4/ENG/101.5

90

Reference your ACC/062/PWU of 5th August 1944.

1. One copy of drawing showing general layout of this system is attached.
2. Completed Forms ACC/2 have been demanded and will be forwarded as soon as possible.

A.G. Evans
A.G. Evans, Maj. R.E.
for Regional Engineer ACC IV (P.W.)

Enclosures: 1 tracing. ✓


Key Eng. Regt

to Col Raper

That system covers a considerable distance.

232
Chief Clerk
Please file; and in to
doing with; please cross-ref.
with; in view of correspondence
16 Aug

CON/ORTIAL AQUEDUCT OF SIMBR
ACQUEDOTTO CONFORZIALE DEL SIMBRI
SOCIETA' ITALIANA PER CONDOTTE D'ACQUA
- ROMA -

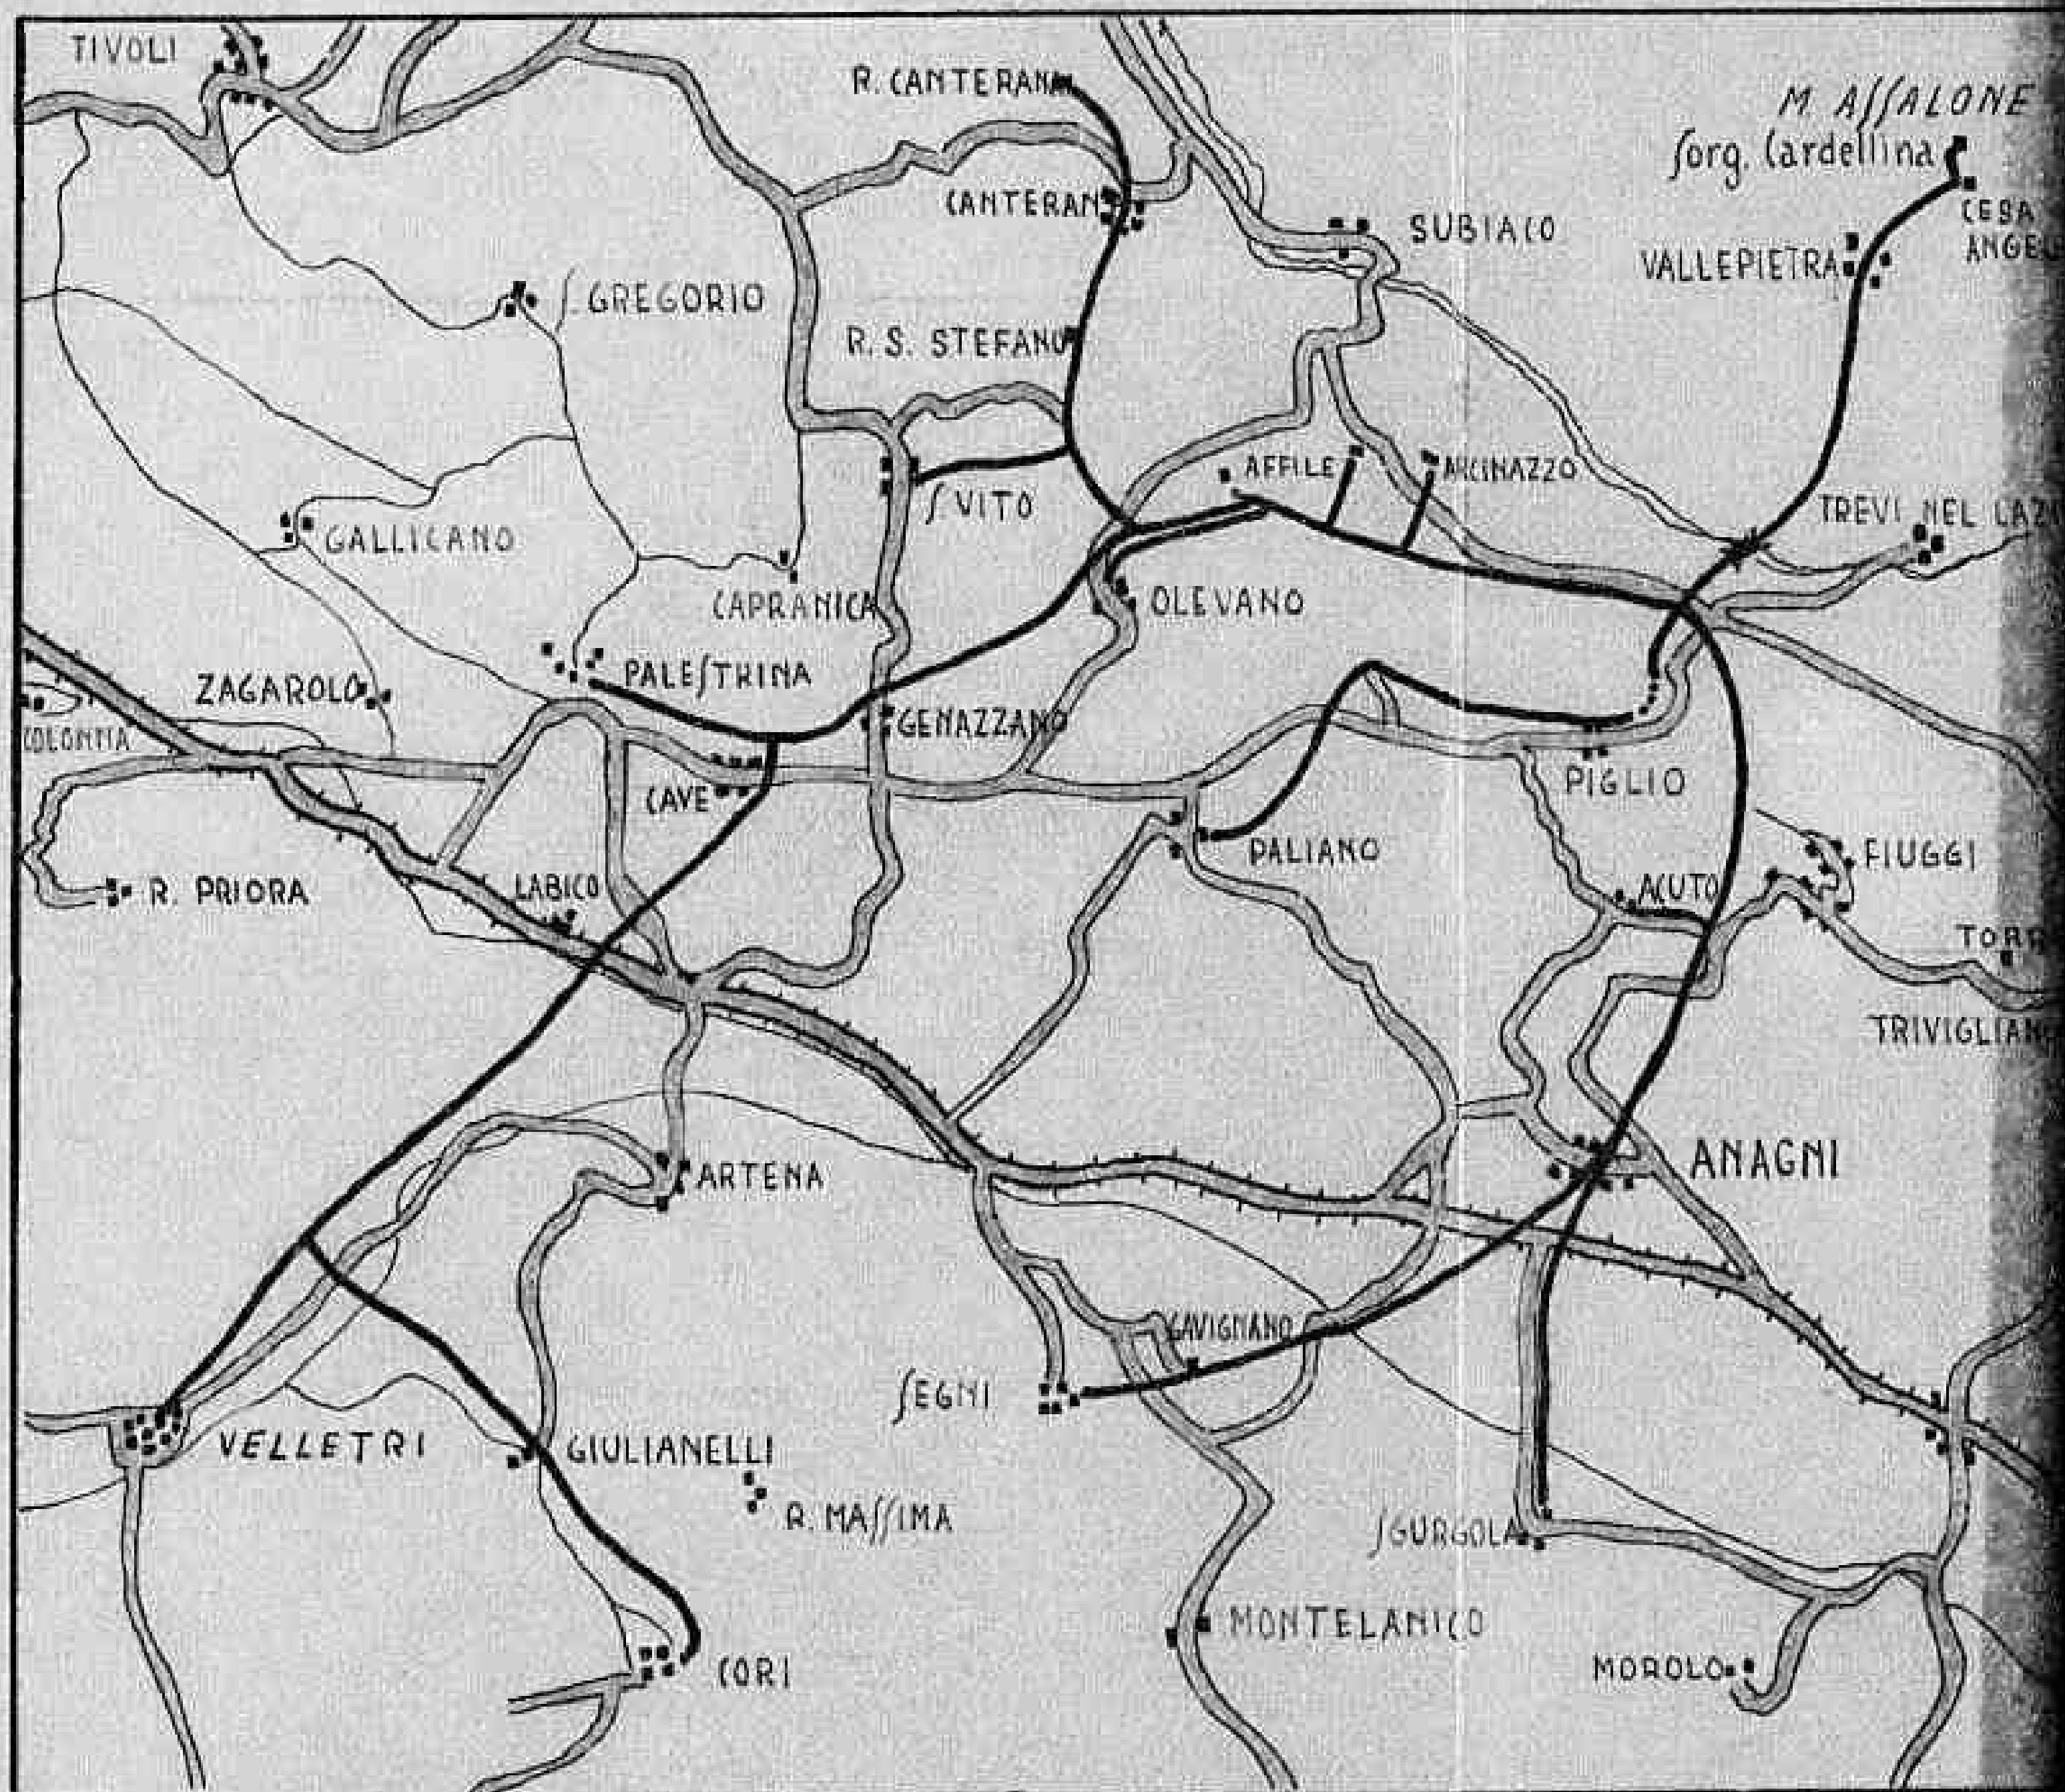


SCALA 1:250.000

ENGINEERING
DIVISION

PARTIAL AQUEDUCT OF SIMBRIVIÓ

DOTTO CONSORZIALE DEL SIMBRIVIO

SOCIETA' ITALIANA PER CONDOTTE D'ACQUA
- ROMA -

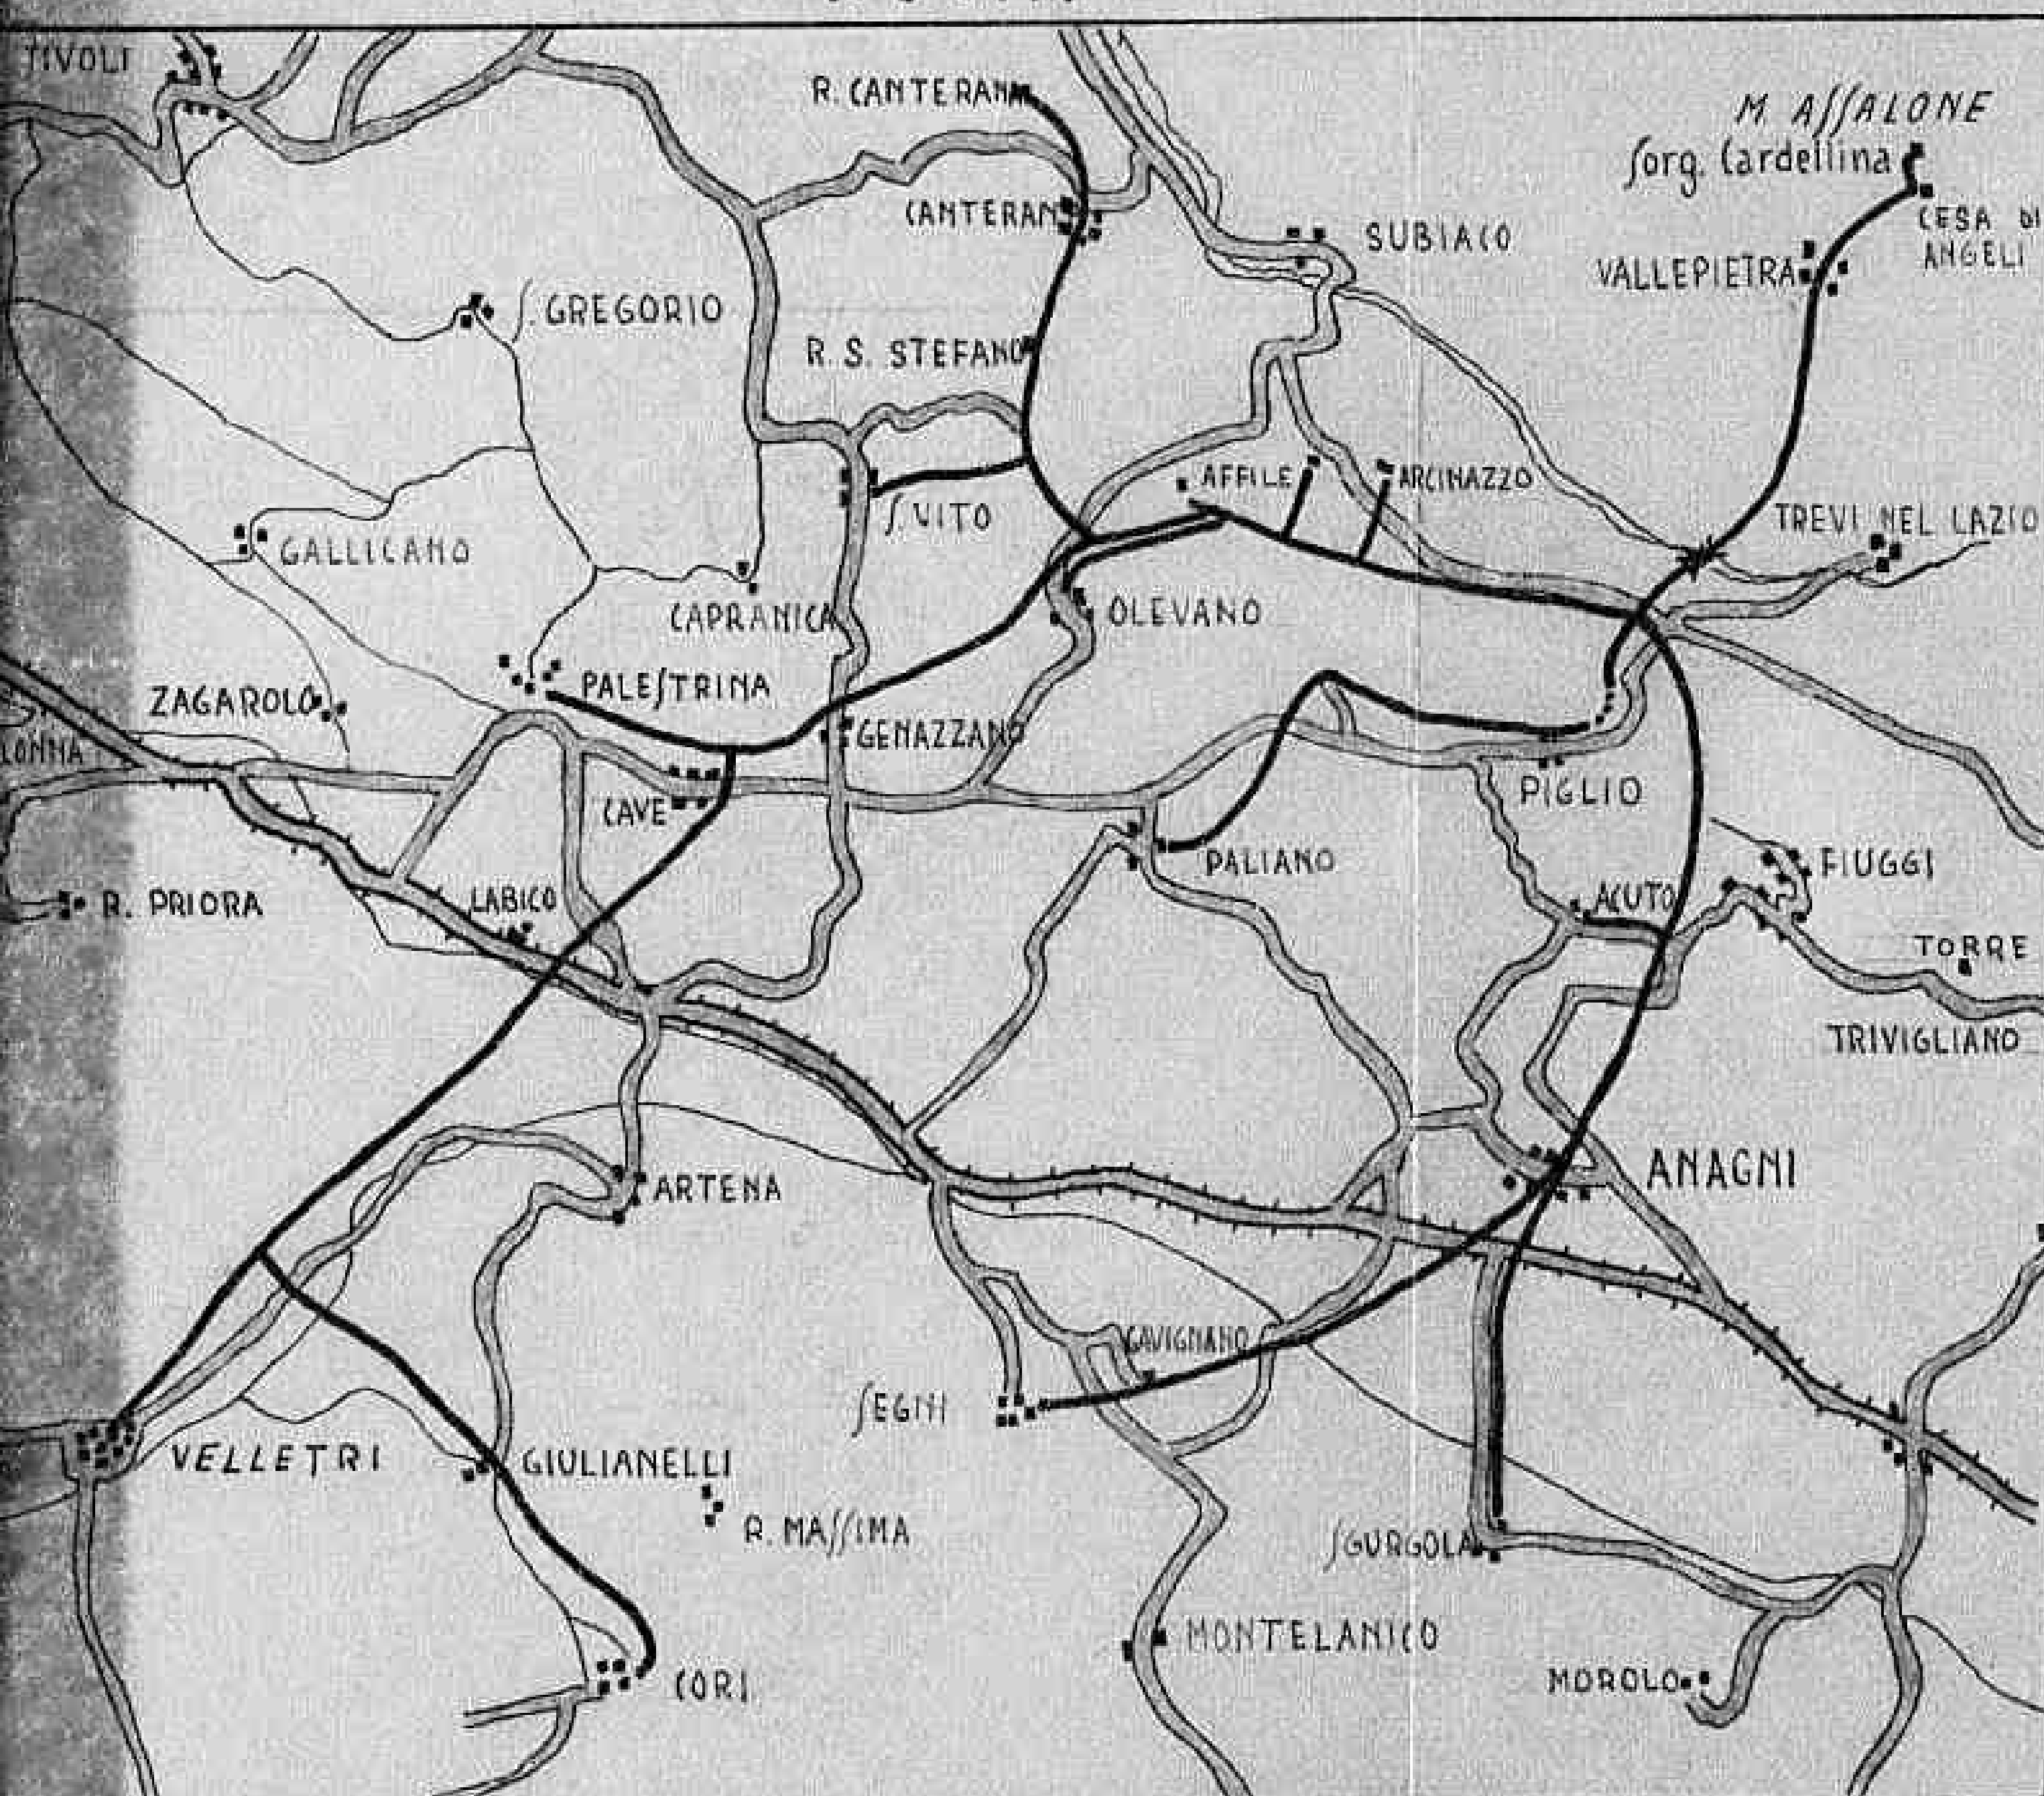

SCALA 1:250.000

A.C.C.

REGION IV

DRAUGHTSMAN

De Micheli G.

DATE _____

August 12-'44

DRAWING N°

WS/14

Tel:489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWU/tr

ACC/108/PWU

17 Aug, 44

SUBJECT : Frosinone - Sewerage and Water Supply .

TO : Regional Engineer, H.Q. Reg.IV. AMG/ACC
attn: Maj. Evans .

1. Ref. your letter R4/ENG/101.7 (a&b) dated
8 Aug.44.

2. One copy of each of the two forms ACC/2 is re-
turned herewith. Both are approved .

W.M.LAPPER
Lieut-Colonel,
Chief, Util. & Adm. Div.

Copy to file 062 (Water Supplies) ✓

11 AUG Recd 0600

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

CdeCER/sc.

9th August 1944.

TO : Ing. A. Alicata - Ispettore Generale Compartimentale
del Genio Civile per il Lazio & Umbria. (2 copies)
Roma, Via Mennambano 10.

SUBJECT: GASTA - Water Supply.

IN REPLY QUOTE: R4/ENG/101.36

1. One copy of report by Prof. COLOSIMO was handed to you to-day.

2. From the report it is clear that:

- a) Concrete pipes are of bad quality.
- b) Joints inferior type of construction.
- c) Perhaps inadequate for higher pressure.
- d) Water losses will occur as I understand they did before the war.
- e) Danger of infiltration of sewage into pipes.

Generally the pipe is fundamentally unsound and should eventually be replaced in any final scheme.

Further it is clear that he is of opinion that the Ente Acquedotto has underestimated the damage that may have occurred throughout the length of pipe to poor type of joint and pipes by earthquakes causes by nearby explosions.

It is clearly doubtful whether repairs contemplated in the estimate submitted will be successful.

3. Estimate submitted 10 Tempo

It is therefore necessary to limit the expenditure on this work and watch it very carefully and if the initial excavations indicate that the damage is more extensive than expected by Ente Acquedotto the work must be immediately stopped as it is a type of work that might prove much more extensive and costly than anticipated and result in a gross waste of money.

Against this has to be balanced the cost of carting water which in 6 months will be around 1,600,000.- (to be verified) and the fact that GASTA has a considerable number of habitable houses and in vicinity there is a complete lack of winter accommodation.

I send approval for scheme up to L. 1,000,000.- only and that is on clear understanding that work is inspected frequently and stopped if damage is found after opening up to be greater than anticipated.

1. One copy of report by Prof. COLOSIMO was handed to you to-day.

2.

From the report it is clear that:

- a) Concrete pipes are of bad quality.
- b) Joints inferior type of construction.
- c) Perhaps inadequate for higher pressure.
- d) Water losses will occur as I understand they did before the war.
- e) Danger of infiltration of sewage into pipes.

Generally the pipe is fundamentally unsound and should eventually be replaced in any final scheme.

Further it is clear that he is of opinion that the Ante Acquedotto has underestimated the damage that may have occurred throughout the length of pipe to poor type of joint and pipes by earthquakes causes by nearby explosions.

It is clearly doubtful whether repairs contemplated in the estimate submitted will be successful.

3. Estimate submitted 10 Tempo

It is therefore necessary to limit the expenditure on this work and watch it very carefully and if the initial excavations indicate that the damage is more extensive than expected by Ante Acquedotto the work must be immediately stopped as it is a type of work that might prove much more extensive and costly than anticipated and result in a gross waste of money.

Against this has to be balanced the cost of carting water which in 6 months will be around 1,600,000.-- (to be verified) and the fact that GAZTA has a considerable number of habitable houses and in vicinity there is a complete lack of winter accommodation.

I send approval for scheme up to L. 1,000,000.-- only and that is on clear understanding that work is inspected frequently and stopped if damage is found after opening up to be greater than anticipated.

(Annexed are detailed observations on Estimate).

4.

Meanwhile an alternative 10 Tempo must be considered.

On a rough calculation if the pipe could be taken round (near sea) the two high points a 4" pipe laid temporarily on surface would give without pumping 24 lit/sec or 14 lit/head/day for 10,000 people.

With pump contemplated by Prof. COLOSIMO and avoiding ~~high points~~ a 2" pipe would give 14 lit/head/day and a 3" pipe 11 lit/head/day and 4" 22 lit/head/day.

W/L

I think

Please examine this and cost which should not exceed 3 million Lire and pipe might be sold later or dug up from Concentration Camp FUMONE near FERENTINO (Frosinone Province), and reused - Sizes 150mm, 100mm, 70mm.

If a gravity feed was used the available water could be doubled by making reservoir of 500 mc. which might be cheaper combined with smaller pipe.

5. 2° Tempo. Final scheme likely to cost about 12 to 18 million Lire and therefore must be carefully considered NOW as if deemed to be prohibitive to undertake by Italian Government the 1° Tempo scheme should be sufficiently good to last for say 3 years.

The costs, new piping, all indicate using the MAZOCOLO Spring and NOT the CONCA Spring. It is therefore worth considering whether in 1° Tempo scheme the large pipe should not be laid from that spring.

Chlorination would appear better at GAETA end of pipe if cement pipe remain as ~~collection~~ ^{pollution} on the way is likely.

Lt. Col. R.E.

Regional Engineer ACC IV (P.W.).

Copy to:

→ HQ. ACC. P.W. for information.

(I have copy of scheme and translation available if required).

Requester. See
on 14 Aug.
circa 14 Aug.
[Signature]

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HW/ow 100

ACC/32/PWU

13 Aug. 44.

Subject: Water Supply of ITHI.

To : Regional Engineer, HQ, Region IV AFG/ACC.
(For attention of Lt. Col. Findlay.)

1. Ref. your letter R4/ENG/101.40 of 3 Aug. 44. addressed to Genio Civile, copy to us (received 9 Aug).

2. Your proposal to adopt solution 4(b) (viz. laying a temporary 2" pipe from the Civita springs, at an estimated cost of Lire 1,800,000) as an immediate measure to provide an interim supply, pending execution of solution 1 (or solution 3), is hereby provisionally approved; but please submit Form ACC/1, and in due course Form ACC/2, in order that the prescribed procedure may be followed.

W.M. LAPPER.
Lieut-Colonel.
Chief, Util & Admin Div.

W/27
B/F
21 Aug
Was not
brought
forward

Revised 2327.
circa 7 Sept 44

U R G E N T 19 AUG 1944

HEADQUARTERS

Allied Control Commission

APO 394

GdeCEP/sec.

0620

C.R.

Dated
8-8-44

3rd August 1944.

TO : Ispettore Generale del Genio Civile per il
Lazio & Umbria.
Roma, Via Monzambano 10.

SUBJECT: ITRI - Water Supply.

IN REPLY QUOTE: R4/ENG/101.40

1. Enclosed is report of Prof. Colosimo dated 27th July and you, I understood, have also received a report from Ing. Domenicus dated 22nd July in which he suggested as an emergency solution the laying of a temporary 2nd pipe.

2. Normal population about 7000 at present believed about 1000. Remainder are believed to be scattered round mostly country and it is said that this country is waterless and it was the habit in dry weather for many people to come into the town to get water.

At present the town is without any potable water except what is carted from Formia 9 kilometer distance.

The medical officer of health and an army officer both visited Littoria on 18th July and told me that epidemics were starting which they blamed on water.

Water is being carted daily and there is not even a tank into which to empty the tank on lorry.

An immediate SOLUTION is ESSENTIAL.

The repair of acquedotto is a 6 months job.

3. There are 4 solutions suggested

1) Repair of old acquedotto Say 1,000,000.- Time 6 months.

2) New aqueduct from Formia springs Time 3 months

Say 2,500,000.-

3) Continuation of bore hole started by American Army Engineers and stated locally to be 80 m. deep without finding water - Night or might NOT be successful.

4) Taking water by gravitation from Olivita springs

Ad Col Rappier
May 9/1944
10/1/44

1. Enclosed is report of Prof. Colonino dated 27th July and you, I understood, have also received a report from Ing. Domenicus dated 22nd July in which he suggested as an Emergency solution the laying of a temporary 2nd pipe.

2. Normal population about 7000 at present believed about 1000. Remainder are believed to be scattered round mostly country and it is said that this country is waterless and it was the habit in dry weather for many people to come into the town to get water.

At present the town is without any potable water except what is carried from Formia 9 kilometer distance.

The medical officer of health and an army officer both visited Littoria on 18th July and told me that epidemics were starting which they blamed on water.

Water is being carted daily and there is not even a tank into which to empty the tank on lorry.

An immediate solution is essential.

The repair of acquedotto is a 6 months job.

3. There are 4 solutions suggested

1) Repair of old acquedotto Say 7,000,000.- Time 6 months.

2) New aqueduct from Formia springs Time 8 months

Say 2,500,000.-

3) Continuation of bore hole started by American Army Engineers and stated locally to be 80 m. deep without finding water - Might or might NOT be successful.

4) Taking water by gravitation from Civita springs

a) By repairing old aqueduct

b) by laying a temporary 2" pipe which will carry the winter yield. Cost say 1,800,000.-

4. Solution No 3 if successful would probably be cheapest but as level of water in Formia "falda" is about 10 m. above sea level and Itri stands at 176 m. water may NOT be found if at all above say 150 m. depth, and geologically Professor Colonino considers water might NOT be found at all in calcareous rock.

Investigations are being made by well boring firm but report not yet received.

Meanwhile it cannot be considered it is also doubtful if a suitable deep well pump or airlift pump could be obtained.

W/27

B/F 21 Aug

5. Solution No 1 & 2 too long to wait with no water but Professor Colosimo definitely recommend No 1 for present final solution both in cost and because water is better quality.
6. Solution No 3. Both Ing. Domenicus a Water Engineer and contractor and Professor Colosimo consider that the initial suggestion of repairing the old masonry aqueduct would be costly, use much cement and with the small summer yield of springs no water might arrive.

Solution No 4. This appears the only solution that will give a quick result.

Say a month, if ^{2" pipe} laid on top of ground except when necessary to avoid airlocks or damage when crossing tracks.

The present yield of ≈ 2 litres per sec. will give about 27,000 litres a day sufficient for drinking and cooking provided a cistern of at least 20 mc. is provided. I recommend 2 suitably placed of that size so as to allow more in winter.

The yield may drop in September.

The winter yield of 3 lit/sec should ^{be} ample supply till next June or July. *

The water is reported to get turbid after rain; the cisterna should help in this or perhaps a ^{supply} tank near ^{baffle} source would reduce further, and manual chlorination could be used if tests ^{show} to be necessary.

After ~~Cons.~~ ^{denig} views of both Ing. Domenicus and Prof. Colosimo independently I consider ~~this~~ ^{* Solution 4 (C)} should be undertaken at once as Emergency work dictated for health.

A rough comparison of costs between carting and this temporary scheme is in favour of the scheme over a 6 months period.

Please take action accordingly.

Demand for release of 7000 m. of 2" pipes is being made by me. Inform me should you know where obtainable locally.

7. 2° Tempe. Final scheme. (Solution No. 1). The relaying of ~~old~~ aqueduct project should in opinion of Prof. Colosimo be undertaken. With the temporary solution done this work should be done carefully and thoroughly under competent supervision as the Sindaco reported that the cost of maintenance and upkeep of the old one was 100,000 lire per month due to faulty initial construction and bad design e.g. the pump given 18 l/sec. ^{max} the gravitation pipe only carries 6 l/sec. and no reservoir.

necessary to avoid airlocks or damage when crossing tracks.

The present yield of 22 litres per sec will give about 27,000 litres a day sufficient for drinking and cooking provided a cistern of at least 20 mc. is provided. I recommend 2 suitably placed of that size so as to allow more in winter.

The yield may drop in September.

The winter yield of 3 lit/sec should ^{be} ample supply till next June or July. X

The water is reported to get turbid after rain; the cisterns should help in this or perhaps a supply tank near source would reduce further, and manual chlorination could be used if tests ^{prove} it to be necessary. *boffe*

After *Cons. design* views of both Ing. Domenicus and Prof. Colosimo independently I consider ~~this~~ ^{a supply} should be undertaken at once as Emergency Work dictated for health. ** Solution 4 (C).*

A rough comparison of costs between carting and this temporary scheme is in favour of the scheme over a 6 months period.

Please take action accordingly.

Demand for release of 7000 m. of 2" pipes is being made by me. Inform me should you know where obtainable locally.

7. 2^o Tempo. Final scheme. (*Solution No. 1*).

The relaying of ~~old~~ aqueduct project should in opinion of Prof. Colosimo be undertaken. With the temporary solution done this work should be done carefully and thoroughly under competent supervision as the Sindaco reported that the cost of maintenance and upkeep of the old one was 100,000 lire per month due to faulty initial construction and bad design e.g. the pump given 18 l/sec. ^{over} the gravitation pipe only carries 6 l/sec. and no reservoir.

These scheme are fully set out in Prof. Colosimo report. Arrangements should be made to prepare this scheme.

When completed the temporary pipes could be picked up and sold or left in to reduce costs of pumping.

8. ~~best~~ Please let me know if you concur in these solutions, and ~~that~~ the matter is very urgent, as Doctors are afraid of typhoid ~~break~~ out, and confirm that orders for immediate execution have been given.

** Solution 4 (C)*

Grillone

Lt. Col. R.E.
Regional Engineer ACC IV (P.W.)

Enclosures: 1 copy of report.

Copy to:

Capo del Genio Civile Littoria with copy of Report by Prof.

Provincial Commissioner LITTORIA for information. Colosimo.

ACC. PW. requesting provisional approval for temporary solution. (One copy of Report is available in my office to see).

18 AUG 1944

062
vis.

HEADQUARTERS

Allied Control Commission

APO 394

GdeCEP/so.

3rd August 1944.

TO : Ispettore Generale del Genio Civile per il
Lazio & Umbria
Roma, Via Monzambano 10.

SUBJECT: TERRACINA - Water Supply.

IN REPLY QUOTE: R4/ENG/101.37

1. Enclosed are two copies of report by Prof. Colosimo.
Please return one with the estimate for "1° tempo" work.

2. Please order immediate action on the whole of
"1° tempo" work and include provision for temporary distribution
pipe to 3 or 4 fountains as near habitable portions of town as
the level will allow.

On 18th July I visited TERRACINA with Ing. ZOPPI and
told him I wished work on getting the water by gravity to a
fountain placed as near the town as the water would rise. I hope
this work is complete and that the inhabitants have at least one
fountain fairly near as the present Mineral Spring is far away
at the other end.

3. A scheme of about 6.4 million was prepared about 3rd
June but NOT received by me till about 5th July. It had no
recommendation from any responsible person and was sent to Genio
Civile for report.

A further report was received on 14th July was handed
to Prof. Colosimo on 18th July and was by Ing. Mangoni to which
he refers. Then has been seen by Genio Civile Littoria and
proposed what is clearly defined under "1° tempo" by Prof.
Colosimo.

It is unfortunate that this simple solution did NOT
come in first instead of a large scheme of doubtful wisdom and
certainly NOT justified at the time.

4. As regards "2° tempo" until the whole question of
rebuilding the town on the same or another site has been settled

1. Enclosed are two copies of report by Prof. Colosimo. Please return one with the estimate for "1° tempo" work.

2. Please order immediate action on the whole of "1° tempo" work and include provision for temporary distribution pipe to 3 or 4 fountains as near habitable portions of town as the level will allow.
On 18th July I visited TERRACINA with Ing. ZOPPI and told him I wished work on getting the water by gravity to a fountain placed as near the town as the water would rise. I hope this work is complete and that the inhabitants have at least one fountain fairly near as the present Mineral Spring is far away at the other end.

3. A scheme of about 6.4 million was prepared about 3rd June but NOT received by me till about 5th July. It had no recommendation from any responsible person and was sent to Genio Civile for report.

A further report was received on 14th July was handed to Prof. Colosimo on 18th July and was by Ing. Mengoni to which he refers. Then has been seen by Genio Civile Littoria and proposed what is clearly defined under "1° tempo" by Prof. Colosimo.

It is unfortunate that this simple solution did NOT come in first instead of a large scheme of doubtful wisdom and certainly NOT justified at the time.

4. As regards "2° tempo" until the whole question of rebuilding the town on the same or another site has been settled I do not consider that the execution of "2° tempo" a matter of 5 or 6 million lire should be done; but it seems most desirable to carry out the investigations suggested by Prof. Colosimo; if you concurred will you please arrange accordingly so that the data on which to base a definite scheme is available well before the time a decision is made about the town of TERRACINA.
Please send me your view on this.

Enclosures: 2
and spare copy of letter.

Copy to:

→ ACC. (P.W.) for information.

A copy of the proposals are available in my office.

Carlucci Lt. Col. R.S.
Regional Engineer ACC PW (P.W.)

W/28

Tel. 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

AEP/ce

10 Aug 44

ACC/062/PST.

SUBJECT: Water Supply Perugia Province.

TO : H.Q. Region V.
att. Regional Engineer.

1. The attached letter from Dr. Ing. Francesco MAZZUCA is forwarded for information.

encl.

C.E. RHODES,
Lieut-Colonel, R.E.,
Deputy-Director.

2323

0621 8 AUG Recd

RUC 2494

95
8872

HEADQUARTERS REGION IV
Allied Control Commission
(Engineering Division)
APO 394

GdeCEF/sc.

7th August 1944.

TO : HQ. ACC. (Public Work).
SUBJECT: Water Supply Perugia Province.
FILE N^o: R4/ENG/600(n)

1. Enclosed is letter dated 4th August 1944 from Dr. Ing. Francesco MAZZUCA, ROMA, Via Firenze, 50. Tel: 44062. I know nothing about him.
2. I suggest that this information might be of interest to the Regional Engineer concerned. Will you please pass on to him.
3. I am dealing with VALFABBRICA (warehouse).

Callahan

Lt.Col. R.E.

Regional Engineer ACC IV (P.W.)

Enclosures: 1.

Dr. Mazzuca declares that he left the country in Sept 43, but, having now returned, desires to report to the Gen. Court and Municipal Authorities of whom he was previously working.

Age: 37.

1. Lt Col Rhodes. Please
2. Lt Col Gapper
3. Capt. P. - Pls. handle and forward to Reg. 5

GFA
8/8

Waf 8/8

2322

Seen.
Capt. Precy.
N.A.P.

Waf 9 Aug.

4 AUG Recd

062 CCB

PW+U

8213 93

1st. Ind.

CU-780

Hq. Region 3, ACC., APO 394, U.S. Army, 2 August 1944

TO: Public Works & Utilities Sub-Commission
Hq. A.C.C. APO 394

5/8

debt Rapper
Ref 5/8

1. One pump has been repaired and is in service at Sorrento. The second pump and electric motor is being repaired by an electrical firm in Naples. They promise to have the job done by 10 August and will notify this office at once so delivery may be expedited. The Castellammare pump can be returned upon delivery of the second pump.

LJH/pc.

Lester J. Hensley
LESTER J. HENSLEY
Lt. Col. C.E.
Regional Engr. Officer
Region 3.

2329

Noted. No further action.

Given 5/8/44

Tel:478200

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/tr

92

ACC/062/PWU

22 Jul 44

SUBJECT : SORRENTO Water Supply .

TO : Regional Engineer, Region III A.C.C.

1. Ref. our letter ACC/138/PWU dated 7 Jul 44.

2. We should be glad to know the results of your investigations, please.

3. This subject was first brought to our notice by Major Howe, S.O.R.E. (E&M), 3 District, on 13 Jun, and was immediately communicated to you, but it appears that little progress had been made when Major Howe found it necessary to appeal to us again on 7 Jul. It is hoped that you may now be in position to report that the difficulties have been satisfactorily resolved.

W.M. Lapper
W.M. LAPPER, 2313
Lieut-Colonel,
Chief, Util&Adm. Div.

FILE

All these documents
to be filed together,
Please

Il CAPO UFFICIO

Roma, 11

Water Supplies.

Lt. Col. Laffer.

5 Aug 44

Ref. attached documents relating to
SORA water supply.

This scheme has been approved by the Regional Engineer under his legitimate powers, because (a) the estimate is less than one million lire, and (b) all materials are available. You will observe, however, from the footnote on the Order, that the copies of Form AC/1 have been sent to HQ. for usual action. According to my interpretation of the Directive, we do NOT require them, nor do we need to take any action beyond perusing the scheme and filing the documents for record.

Lt. Col. Findlay, however, contends that our Directive is NOT clear on this point and wishes the matter to be clarified in writing. Personally, I do not agree, but perhaps you have some views on the subject.

Kindly return the documents to me.

W. Westbury Maj. A.E.
5 Aug 44

W/8

101-14

ALLIED CONTROL COMMISSION
PUBLIC WORKS AND UTILITIES SUB-COMMISSION

Form ACC/7
(Estimate
Revised
7 June 44)

Estimate of Work to be carried out

Note: This form to be filled in triplicate; one copy to be retained in Sub-Comm. H.R., File, one to be returned to the Regional Engineer when approved, and one to be sent to the Minister of Public Works.

ESTIMATES - CAPITAL EXPENDITURE

(APPROVALS)

I. (a) Building, Bridge, Road, Power
Stn, Pumping Stn etc, and location Repair of Waterline in SORA

(b) By contract or direct labour contract

(c) Amount of approximate estimate Lire 970.000.-

(d) Urgency of project urgent

(e) Probable time for completion three weeks

(f) Special remarks Work in hand Materials available

2. Certificates:

(a) Certified that the attached approximate estimate amounting to Lire 970.000.- has been prepared by me; it covers the full requirements of the project, and is reasonable in amount.

Italian
Engineer

Signature Sd. Ing. Ugo DEL CHICCA

Official designation Ingegnere capo del Genio Civile Frosinone

Date, and place Fiuggi, 15 Luglio 1944

(b) I agree with the preceding certificate and ~~approve~~ approve.

Carla Fusy Date 27th July 1944

Deputy Regional Engineer, ~~XXXXXXXXXXXXXXXXXXXX~~

- (b) By contract or direct labour contract
- (c) Amount of approximate estimate Lire 970.000.-
- (d) Urgency of project urgent
- (e) Probable time for completion three weeks
- (f) Special remarks Work in hand Materials available

2. Certificates:

- (a) Certified that the attached approximate estimate amounting to Lire 970.000.- has been prepared by me; it covers the full requirements of the project, and is reasonable in amount.

Italian Engineer { Signature Sd. Ing. Ugo DEL CHICCA
 Official designation Ingegnere capo del Genio Civile Frosinone
 Date, and place Fiuggi, 15 Luglio 1944

- (b) I agree with the preceding certificate and ~~xxxxxxxxxx~~ approve it.

Carla Fusy Date 27th July 1944
 Deputy Regional Engineer, ~~xxxxxxxxxxxxxxxxxxxx~~

ACU IV.

2317

3. Approved.

(Highway Fund)
 (Other Funds)

Chief, Public Works Div. P.W. & U. Sub-Comm. ACC.

4. Approved.

Director, P.W. & U. Sub-Commission A.C.C.

W/8

29 JUL Recd

108. CCB.

HEADQUARTERS
Allied Control Commission
APO 394

GdeCEP/sc.

27th July 1944.

TO : Genio Civile - FROSINONE.
SUBJECT: SORA - Water Supply.
FILE No: R4/ENG/101.14.

Reference your letter dated 15th July received 26th July.

1. Enclosed is one copy of Form ACC/1 approved for Lire 970,000.- by Deputy Regional Engineer ACC IV.

2. Demand for funds to be made on Mod. SB5.

3. Remarks: This was explained by Maj. EVANS R.E. In any future projects please submit sketch and report shewing scope and work when submitting project.

In this case forward explanatory sketches and lay out.

[Signature]
Lt.Col. R.E.
Deputy Regional Engineer ACC IV.

Enclosures: ACC/1.


Copy to:

ACC IV. (Finance);

Provincial Commissioner FROSINONE Province (Finance);

→ ACC (P.W. & U.) with 3 copies of ACC/1 and Estimate for normal action.

[Signature]
Maj. Evans
27/7

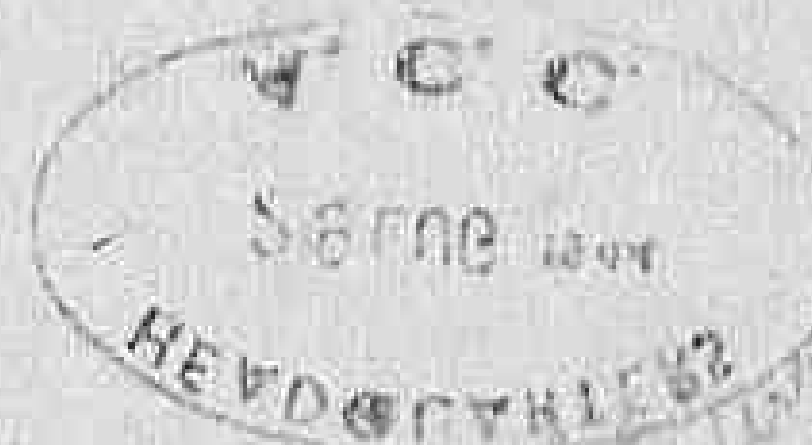

23/7

[Signature]
10000 Lire

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394.

HWW/ac

ACC/062/PWU

5 Aug. 1944.

Subject : SIMBRIVIO - Water Supply

To : Regional Engineer, H.Q., Region **IV**
AMG/ACC *for attention of Lt. Col. G. de C.E. Findlay, V.C., M.C., R.E.*

1. Reference letter R4/ENG/101.5, dated 27 July 44, from H.Q. original Region IV.

2. Approval having been given to the second part of the SIMBRIVIO water supply rehabilitation scheme, the following documents are returned to you herewith :-

- (a) One copy of form ACC/1, duly signed and countersigned, approving the scheme at an estimated cost of Lire, 5,600,000
- (b) One copy of the list of controlled materials.
- (c) "Relazione".
- (d) Estimate.
- (d) Plan.

3. We shall be glad to see the comprehensive plan which you have requested the officials of the Asquedotto to furnish.

4. As soon as possible, please submit Form ACC/2 in triplicate, in accordance with Instruction No. 4, dated 7 June 44.

5. We take this opportunity to remind you that we still await Form ACC/2 in respect of the first part of this scheme, viz. the repair of the main aqueduct.

W.M. LAFER,
Lieut-Colonel.
Chief Util. & Admin. Div.

~~Copy to Regional Engineer,~~
~~H.Q., Region IV, AMG/ACC.~~
File 108

Both now received.
231
9/10/44

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/tr

ACC/108/PWU

5 Aug, 44

SUBJECT : SIMBRIVIO Water works .

TO : Ministry of Public Works
att: Comm. Tizzano .

For your information we forward herewith a signed copy of Form ACC/1 relating to the second part of the scheme for rehabilitation of the Acquedotto Simbrivio. You will observe that the scheme has been approved for execution at an estimated cost of Lire 5,600,000.-

L.A. JENNY
Lt-Colonel,
Director

Copy to File 062

2314

G.deC.E.F./es

28 JUL Recd

060000.

HEADQUARTERS REGION IV
Allied Control Commission
APO 394PW+U 29
708227th July
22nd July 1944

TO : H.Q. AGC (Public Works & Utilities Sub-Commission)

SUBJECT: SIMBRIVIO Acquedotto (Distribution System)

FILE NO: R4/ENG/101.5

1. Enclosed is Form AG3/1 in triplicate, please return in duplicate with approval (Lire: 5.600.000)

2. Enclosed is list of controlled materials one copy please return. (Already obtained authority)

3. Enclosed is copy of following for retention by you:

a Letter from Genio Civile N° 1514 dated 16th July

b Relazione

c Stima

Plans - Photographed for return.

Verbale somma urgenza

Remarks:

- a) Approval has been confirmed to start work up to 200.000 lire under Reg. 350 - Decreto Reale N° by Società Italiana who made the Acquedotto and had a running contract for maintenance.
- b) The SIMBRIVIO Company have been asked for a complete plan of acquedotto which I have seen.
- c) The estimate is an approximate one as actual previous water tests alone can show breaks not outwardly visible.

I have called for plans of "Bottini Partitori" as I do not understand need of 900.000 for the two. But believe they are Reservoirs holding 10 days supply. Also walling should be in lime not cement.

The estimate is for approval.

231

1. Enclosed is Form ACC/1 in triplicate, please return in duplicate with approval (Lire: 5.600.000)

2. Enclosed is list of controlled materials one copy please return. (Already obtained authority)

3. Enclosed is copy of following for retention by you:
a. Letter from Genio Civile N° 1514 dated 16th July

b. Relazione } original return } Return
c. Stima

Plans - Photographed for return.
Verbale somma urgenza

4. Remarks:

a) Approval has been confirmed to start work up to 200.000 lire under Reg. 450 - Decreto Reale N° by Società Italiana who made the Acquedotto and had a running contract for maintenance.-
b) The SIMBRIVIO Company have been asked for a complete plan of acquedotto which I have seen.

c) The estimate is an approximate one as actual previous water tests alone can show breaks not outwardly visible.

I have called for plans of "Bottini Partitori" as I do not understand need of 900.000 for the two. But believe they are Reservoirs holding 10 days supply. Also walling should be in lime not cement.

The estimate is for approval.

Chilley 1231
Lt. Col. R.E.
Deputy Regional Engineer ACC IV.

Number of Enclosures: 2

Copy to Genio Civile: (Ispett. Generale) for information.

P.S. Please return also originals annexed 3 ~~a~~, b and c.

RECEIVED

28 JUL 1944

14 AUG 1944

8329

HEADQUARTERS
Allied Control Commission
APO 394

062

GdeCEF/so.

3rd August 1944.

TO : Genio Civile - LITTORIA.
SUBJECT: FONDI - Water Supply.
IN REPLY QUOTE: R4/ENG/101.39

1. This supply was in action until recently when apparently the Militar Pump was removed by whom or when no report was received and when passing Prof. Colosimo discerned the town was without water again.
2. Enclosed is report by Prof. Colosimo,
 - a) please take immediate action on "1° tempo" as Emergency job. This will supply water but no reserve if pump is temporarily out of action.
 - b) Work in "2° tempo" appears justified for preparation of scheme and execution to be completed by the date Electricity is expected which will NOT be early in this area.

[Signature]
Lt.Col.R.E.

Regional Engineer ACC IV (P.W.)

Enclosures: 1.

Copy to:

→ ACC. HQ. for information.

Ispettorato Generale with copy of report.

Sum
SEP
5/8

Lt Col Rappin

Hal 5/8 2312

H/c

W/30

Noted and recorded
in Box File.

[Signature]
2 Aug

HEADQUARTERS
Allied Control Commission
APO 394

062

8330

GdeCEF/so.

3rd August 1944.

TO : Ispettore Generale del Genio Civile per il
Lazio & Umbria
Roma, Via Monzambano 10.
SUBJECT: Monte SAN BIAGIO (Pop. 4.000).
IN REPLY QUOTE: R4/ENG/101.38

1. I received a report that this town was lacking in water and asked Prof. Colosimo to inspect when in the area. Enclosed is a copy of his report. No war damage has been suffered.
2. As the inhabitants are getting 43 litres per person per day and many places still without water I am NOT prepared to recommend any action at the present time.

Lucy

Lt.Col. R.E.

Enclosures: 1.

Regional Engineer ACC IV (P.W.)

Copy to:

→ ACC (P.W.) for information.

~~Genio Civile Litteria~~

Provincial Commissioner Litteria with copy of Report.

Note and
recorded in
Gov. file.

2 Aug

5/8

Local Rapper

5/8

23/8/44

N/31

Tel: 489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/tr

ACC/062/PWU

4 Aug, 44

SUBJECT: LIVORNO - Water Supply .

TO : Regional Engineer , HQ.
Region VIII AMC/ACC.

The attached copy letter of 1 Aug 44 from "S.A.T.A." is forwarded for your information as it is thought that it may be of interest to you. The firm's statements have not been verified.

W.M. LAPPER,
Lieut-Colonel,
Chief, Util. & Adm. Div. 2310

C O P Y

S.A.T.A.
Public Works
Water Supply

Rome - 8 - 1944
via Belluno 1

ENGINEERING DIVISION
Vth Army

SUBJECT : Purification Plant for Livorno - Aqueduct.

Our firm being especially qualified as constructor of ~~the~~ Purification Plant for Pond-water supply to the Aqueduct of the town of Livorno, used for drinking water provision, we beg to inform you to be able to reestablish the efficiency of this plant of highest importance for the supply of the town and the harbour.

As constructor of this Plant we are best informed of all constructional details of machinery and apparatus, which considered the fact that this water has all unfavourable qualities of surface - water extremely turbid and impure, are of highest complexity in both filtration - unit and sterilization and lifting-unit/

For these reasons no other firm is so qualified to reconstruct or to repair this Plant to full efficiency in a relatively short period of time.

We are always ready to get your orders for an eventually investigation made together with our engineer to verificate the entity of damages caused to the Plant.

Awaiting your dispositions we remain

Yours faithfully

SATA

ACC.HQ (Major Westwood)

This might be of interest to Region VIII- This firm is doing 2 contracts in this region.

1 Aug, 1944

Lt.Col. G.de C.E. Findlay
Regional Engineer ACC IV

2309

S. A. T. A.

PLUMBERIC WORKS

WATER SUPPLY - WATER PURIFICATION

CONSULTING, HYDRAULIC AND SANITARY ENGINEERS

Agency of the
JEWELL EXPORT FILTER COMPANY

New York - London - Calcutta

Water Works, Gravity and Pressure Filters
Chlorinators, etc.14 AUG Recd
062
C.B.Rome, 1 - 8 - 1944
VIA BELLUNOTel. Offices 862.546
80.168
Factory 490.666
Cable Address SATACQUA ROMA

ENGINEERING DIVISION

= V = ARMY

To be FILED
for referenceSUBJECT: Purification Plant for Livorno - Aqueduct.

Our firm being especially qualified as constructor of the Purification Plant for Pond-water supply to the Aqueduct of the town of Livorno, used for drinking water provision, we beg to inform you to be able to reestablish the efficiency of this Plant of highest importance for the supply of the town and the harbour.

As constructor of this Plant we are best informed of all constructional details of machinery and apparatus, which, considered the fact that this water has all unfavourable qualities of surface - water extremely turbid and impure, are of highest complexity in both filtration - unit and sterilisation and lifting - unit.

For these reasons no other firm is so qualified to reconstruct or to repair this Plant to full efficiency in a relatively short period of time.

We are always ready to get your orders for an eventually investigation made together with our engineer to verificate the entity of damages caused to the Plant.

Awaiting your dispositions we remain

Yours faithfully

2308

C.C.C. Hdr (this was was)

This might be of interest to
Regia VIII - This firm is doing
2 contracts in this region
1st May 1944

S. A. T. A.
SOC. AN. TRATTAMENTI ACQUE

Handwritten signature
Acc. ID

Tel:478200

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/tr

AOC/062/PWU

22 Jul 44

SUBJECT : SORRENTO Water Supply .

TO : Regional Engineer, Region III A.C.C.

1. Ref. our letter AOC/138/PWU dated 7 Jul 44.
2. We should be glad to know the results of your investigations, please.
3. This subject was first brought to our notice by Major Howe, S.O.R.E. (E&M), 3 District, on 13 Jun, and was immediately communicated to you, but it appears that little progress had been made when Major Howe found it necessary to appeal to us again on 7 Jul. It is hoped that you may now be in position to report that the difficulties have been satisfactorily resolved.

2307

W.M. LAPPER,
Lieut-Colonel,
Chief, Util & Adm. Div.

Tel-489081

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

File
HWV/tr

22 Jul, 44

ACC/062/PWU

SUBJECT : Repair of SIMBRIVIO Waterworks .

TO : Regional Engineer, A.C.C., Region IV .

1. Ref. your letter R4/ENG/101.1 dated 20 July 44.
2. Thank you for your remarks and for your report on the good progress of the provisional measures that have been taken.
3. Your letter of 9 Jul took four days to reach the Economic Section at this H.Q.
4. We await your submission of form ACC/2 as already stated in our letter of 14 Jul.

W.M. LAPPER
Lt-Colonel,
Chief, Util. & Adm. Div.

6097 *From Section 1
for PW & U. Sp*HEADQUARTERS
Allied Control Commission
APC 394HEADQUARTERS
G. de C. E. F. / sc.
21 AUG 1944

21 JUL Recd

062 CEB-

A. C. C.
20 July 1944

URGENT

TO : HQ ACC (P.W. & U. Sub Commission)

SUBJECT: Repair of SIMBRIVIO Waterworks.

FILE No: R4/ENG/101.1.

1. Your ACC/062 PWU dated 14th July 1944.
Form ACC/1 was sent to Genio Civile ready for signature (being the first) and received back from Genio Civile on 8th July and the whole was forwarded to you on 9th July this office reference R4/ENG/101.1.
2. I received a report on 18th July that through a pipe laid in bed of stream water is already being supplied to about 12 towns and they hope with further improvised repairs to get water to furthest town in about 2 or 3 weeks.
They expect to complete bridge by 1st September and have the main pipe replaced above flood level before floods start.
3. Water seems to flow faster than paper! Thanks to Major WESTWOODS help in getting cement and lead through, when official channel had failed.

Civilian

Lt.Col. R.E.

Deputy Regional Engineer ACC IV.

2308

21 Jul
96for our reply.
22 Jul

Tel: 478200

HEADQUARTER
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/tr

ACC/108/PWU

18 July, 44

SUBJECT : SIMBRIVIO WATER WORKS

TO : Regional Engineer, E.O. Region IV ,

1. Ref. your letter RA/ENG/101.1 dated 9 July 44.
2. Approval of the scheme is hereby confirmed. One copy of ~~Form~~ ACC/1 (Estimate) is accordingly returned ~~to~~ you herewith, duly signed. The detailed estimate and the drawing of the 20 m. steel span are also returned in compliance with your request. In your letter you speak of plans, but the aforesaid drawing was the only one that you enclosed.
3. In future cases it would be much appreciated if you would kindly provide a copy of every estimate and plan for retention in this office. In the present instance it has been necessary to make a copy of the detailed estimate for record purposes.
4. In accordance with paragraph 6 of Instruction No 4 dated 7 June 44, please submit form ACC/2 (Contracts) in triplicate, as soon as possible.

W.M. LAPPER
Lieut-Colonel
Chief, Util. & Adm. Div.

Copy to: File 062 ✓

0 on 108

W/2

Lt. Col. Lipper

I recommend that the
provisional ~~of~~ approval of this
scheme (which is already in hand)
be formally confirmed. If you
agree, will you please obtain the
necessary signatures on all three
copies of the attached Jones ACC/1
and return them to me for disposal.
I have the other documents.

W. R. R.
W.R.R.
18 Jul 44

OK. Sign this yourself
and ask Col Perry to
sign it.

W. R. R.

FILE ~~062~~ 062

2304

00-2371

13 JUL need

GdeCER/jam

CB 06

HEADQUARTERS REGION IV
Allied Control Commission
APO 394

9 July 1944

TO : HQ, ACC (Public Works & Utilities Sub-Comm.)

SUBJECT: Water Supply - Simbrivio Acquedotto

FILE NO: R4/BNG/101.1

1. Herewith ACC/1 for Simbrivio Acquedotto, in triplicate.

2. Please return estimate and plans.

*only one plan
received.
H. H. H.*

Carroll

Lt. Col. RE
Deputy Regional Engineer

Enclosures:

ACC/1 Form in Triplicate
Estimate & Plans

Copy to:

Ingegnere Capo del Genio Civile
10 Via Monzambano, Roma

Col. Copper

*Pls review and let me
have your recommendation.*

Waf 13/7

230

W/R

Tel: 178200

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/ccb 78

ACC/062/PWU

18 Jul 44

Subject: SORRENTO Water Supply.

To : Regional Engineer, Region IV, A.C.C.

1. Ref. our letter ACC/138/PWU dated 7 Jul 44.

2. We should be glad to know the results of your investigations, please.

3. This subject was first brought to our notice by Major Howe, S.O.R.E. (E&M), 3 District, on 13 Jun, and was immediately communicated to you, but it appears that little progress had been made when Major Howe found it necessary to appeal to us again on 7 Jul. It is hoped that you may now be in a position to report that the difficulties have been satisfactorily resolved.

2302

W.B. LAMPE,
Lieut-Colonel,
Chief, Util. & Adm. Div.

ADVANCE HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HW/ce

ACC/062/PWU

14 Jul 44

Subject: Repair of SIMBRIVIO Waterworks.

To : Regional Engineer, Region IV, A.C.C.

On Friday 30 Jun 44, at the urgent request of the Deputy Regional Engineer, a scheme for the restoration of the demolished portion of the main SIMBRIVIO aqueduct was cursorily examined and was provisionally approved in order that this important work should not be delayed for want of official sanction, it being then understood that there existed no other obstacle to the commencement of operations. The approval was given, however, with the proviso that details and financial estimates of the scheme must at the earliest possible moment be submitted to this Sub-Commission for examination in accordance with the prescribed procedure.

If you are not yet in a position to submit the required details it would be appreciated if you would kindly reply by return, stating the present position of the matter, in order that this Sub-Commission may have some basis on which to decide whether or not to cancel its provisional approval pending submission and examination of your official application.

W.M. LAPPER,
Lt. Col.
Chief, Utilities & Admin. Div.

2307

W/2

10 JUL Recd

CEA 062.

HEADQUARTERS REGION IV
Allied Control Commission
APO 394

3 July 1944

Lt. Col. HARTLEY called 3rd July in from PERUGIA province and reports verbally as under:

SUBJECT: Water Supply

FILE No: R4/ENG/11 (M)

1. Normal Supply undamaged at TODI, SPOLETO2. Damaged but Repaired.

FOLIGNO believed sufficient for all purposes.

3. PERUGIA (40,000 pop.) Both sources in hands of Germans and both cases breaks still under fire.

Town is at present living on Reserve in Reservoir which is only sufficient to supply 1 gallon per head for 3 weeks approximately, may be only 10 days.

(B) Army have provided AMG with n° 35 - 350 gallon Water Carts with ~~Electricity~~ set and pump.

~~Tank~~; Draws water from 8 Public Wells provided with Canvas, and mobile pump which goes from Well to Well in turn. - Depths of Wells not known.

(Tiber water too muddy to use as it clogs pumps.)

In all 52 Water Points in town.
Control very difficult.

(C) For washing and flushing, opening up 200 old wells (and chlorinated) drawing by hand.

Some are running dry, some refilling.

(D) Future Services

A new Source found yields at present 80,000 gallons per day. (320,000 lit/day) = 2 gallons per day per head. but said to dry in hot weather. - Planning to use this while it lasts. Capt. FAIR (lawyer) acts liaison for AMG between Military and Civil Engineers and i/c Rationing of Water.

FOLIGNO believed sufficient for all purposes.

3. ^(H) PERUGIA (40,000 pop.). Both sources in hands of Germans and both cases breaks still under fire. Town is at present living on Reserve in Reservoir which is only sufficient to supply 1 gallon per head for 3 weeks approximately, may be only 10 days.

(B) Army have provided AMG with n° 35 - 350 gallon Water Carts with ~~Electricity~~ ^{Chlorinating} set and pump.

^{Tank;} Draws water from 8 Public Wells provided with Canvas, and mobile pump which goes from Well to Well in turn. - Depths of Wells not known.

(Tiber water too muddy to use as it clogs pumps.)

In all 52 Water Points in town.
Control very difficult.

(C) For washing and flushing, opening up 200 old wells (and chlorinated) drawing by hand.

Some are running dry, some refilling.

(D) Future Services

A new Source found yields at present 30,000 gallons per day. (320,000 lit/day) = 2 gallons per day per head. but said to dry in hot weather. - Planning to use this while it lasts. Capt. FAIR (lawyer) acts liaison for AMG between Military and Civil Engineers and ^{i/c Rationing of Water}.

(E) SEWAGE System undamaged, danger of clogging through lack of flushing.

(F) Municipal and Provincial Engineers found, former good, latter bad.

Corliss

Taken down by Lt. Col. G. de C. E. Findlay.

DISTRIBUTION:

1. Major ~~Perley~~ ^{P.W.}
1. Regional Engineer (circulate)
1. Region IV (circulate)
1. ACC (HQ P.W.)
1. File.

What are you doing to record such data as that we may have a quick picture available at any time?

Plan to make plan

Lt. Col. Laffer

The answer to the Director's
query is that all such info
is abstracted and recorded in the
card index in Room 18.

J. W. L.

10 July.

ADVANCE HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/tr

ACC/062/PWU

10 Jul 44

Subject: Supply of chlorine
for Capua water
supply

To : Regional Engineer
(ACC)Region III ,
Naples

1. The attached letter, No. 3164, of 30 Jun 44,
from the Chief Engineer of the Genio Civile at CASERTA,
is passed to you for urgent attention and necessary
action, please.

W.M. LAPPER,
Lieut-Colonel
Chief, Util.& Adm.Div.

2 enclosures

2294

9 JUL Recd
CCB.

73

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

GWR/lp

ADG/136/PBU

7 July 1944

Subject: Sorrento Water Supply.

To : Regional Engineer, Region III

1. Major Howe (R2004) No 3 District called today to say that the Waterworks Engineer at the above place has been very unhelpful recently. Neither has the Mayor been very energetic.

2. A pumping-plant from Castellammare was loaned to Sorrento some time ago, and they will not

- (a) repair their own plant and
- (b) return the Sorrento unit.

This means "Castellammare".

3. Please have the matter investigated at once.

GER.

Copies to:
C.E. No 3 District.
P.W. & U., Adv.H.

C.E. EDWARDS
Lt Colonel R.E.,
Deputy Director.

*Chief Clerk
Rising from
for further action
17 July*

Lt Col Hopper

*Pls note & file
Try to follow up with Hensley*

RAJ. 7/2292

R/F 17/7.

Major Westmore to Sec.

*See letter of circa
17 Jul to Reg. Eng. II.
Mazzi
17 Jul*

Director

Phoned Major
Fitzgerald today.

Matter is
actively in hand.

GER.

7/7.

B/F to me
3/9

26/7

File in BORD

Planned re para 4.

B/F tomorrow

5/7

6/7

50050-19

Major Fitzpatrick (Reg III Eng)
Called Capt. Nelson & took care of this Release
 HEADQUARTERS
 ALLIED CONTROL COMMISSION
 Public Works and Utilities Sub-Commission
 APC 394.

URGENT

GER/ao

ACG/062/PWU

2 July 1944.

Subject : Military Railways. (Water for Locomotives).

To : Regional Engineer, Region XII.

1. The officers from the D.G. Military Railways called to see me today. One line of railway from Naples to Rome is operating and the other (the coastal one) may be ready by the middle of this month.
2. Diesel-driven locomotives have been sent to Rome and there is increased dependence on steam locomotives. The particular difficulty is at Avessa near Naples where anything up to 50,000 gallons a day at the railway station is required. To get this, probably a rationing scheme on the town will have to be enforced. A general investigation is required very urgently.
3. Please get one of your officers to telephone Capt. Nelson of the 701 Railway Operating Division. No. 54338 telephone, and Capt. Nelson will go out with your officer when he makes the investigation. When completed please send me a copy of the relevant report.
4. In view of the urgency of the matter will you please acknowledge receipt of this letter.

① *Donato*

Noted
GER

G.E. RICHES,
 Lieut-Colonel, R.E.,
 Deputy Director.

To see

② *W. R. L.*

GER 2297
 2/7



Ministero dei Lavori Pubblici
Direzione Generale

N. di prot. *11/* *Na* Div.

Napoli, addì *26* giugno 1944

Allegati N.

Risposta al foglio del 13/6/1944
N. ACC/062/PWU

Al Dr. Ing. Capo RUGGIERO
Placido - Esperto Acquedotti

N A P O L I

OGGETTO:
Tariffe dell'Acquedotto di Napoli.-

per conoscenza

Lt. Col. Lapper
Chief. Utilities & Adm. Div.
Sottocommissione A C C

N A P O L I

Sindaco di N A P O L I

Società Acquedotto

N A P O L I

Lt. Col. Lapper
16/6

In relazione alle autorizzazioni concesse dall'ACC per l'aggiunta di sovrapprezzi agli importi risultanti dalle fatture per la somministrazione dell'acqua, vi assicurerete che detti aumenti sono contenuti nei limiti delle autorizzazioni, e sono applicati in aggiunta all'ammontare della fattura liquidata in base alle tariffe convenzionali.-

IL DIRETTORE GENERALE

Capa 2295

File 62

70

MINISTRY OF PUBLIC WORKS

Naples 26 June 44

Subject: Tariff's of $\pm$ Naples Aqueduct.

To : Engr. Ruggiero Placido - Expert on Aqueduct.

Regarding authorization granted by ACC for increase in rates, on amounts resulting in bills, for distribution of water we assure you that said increases are within the authorized limits and are applied in addition to the charges calculated as per base tariff.

*For
H. M.
3/2/44*

2295

ADVANCE HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

WML/ce

ACC/062/PWU

5 Jul 44

Subject: Water Supply in Apulia
To : Regional Engineer, Region II.

1. Attached is a translation of a letter sent by H.E. the Minister of Industry, Commerce & Labour requesting 5 tons of Calcium carbide for use of public works in Apulia.
2. This letter was sent to the Industry & Commerce Sub-Commission and has been forwarded to us for approval.
3. Will you please state if the material is necessary and whether it is urgently required bearing in mind that it is an imported item.
4. If you consider the material should be obtained, please complete the M.A.T.10 form passing this through your Supply Officer to the Industry & Commerce Sub-Commission in the usual manner.

W. M. Lapper

W.M. LAPPER
Lieut-Colonel
Chief, Utilities & Adm.Div.

Encl.

30 JUN Recd
062
HEADQUARTERS
ALLIED CONTROL COMMISSION
INDUSTRY & COMMERCE SUBCOMMISSION
APO 394

WJM/oc

Ref. ACC/5084/IC

28 June 1944

SUBJECT: Public Works - Water Supply.

TO : Public Works & Utilities Subcommittee.

1. Attached is letter from H.E. the Minister of Industry, Commerce and Labour requesting 5 tons Calcium Carbide for use on public works in Apulia. Translation is enclosed.

2. Calcium Carbide is not in production in Liberated Italy, so far as is known at the moment, and must be imported. If the request is approved by you, please make application through A.F.L.R. (I) Board.

2 Incls. Ltr from Minister of Industry, Commerce & Labour, dated 22 June 44, and translation thereof.

John Stodd
W. P. EVANS
Colonel,
Director, Industry and
Commerce Subcommittee

2293

*At Col Rupper
Pls investigate
and act ac-
cordingly
H.J. 30/6*

C O P Y /al

MINISTERO dell'INDUSTRIA
del COMMERCIO e del LAVORO
- Servizio Consumi Industriali -

Vietri sul Mare, 22 Giugno 44

Div. 4 Prot. n. 1249

Alla Commissione Alleata di
Controllo - Sottocommissione
dell'Industria e Commercio

S A L E R N O

OGGETTO: Richiesta assegnazione alla cortese attenzione del Sig.
carburo di calcio. Col. Crump

L'Ente Autonomo per l'Acquedotto Pugliese di Bari ha richiesto a questo Ministero qli. 50 di carburo di calcio, da servire per l'illuminazione delle Gallerie durante i lavori necessari alla manutenzione del canale principale dell'acquedotto stesso.

Tenendo conto della necessità di provvedere alla manutenzione del suddetto canale, lungo circa cento chilometri - manutenzione che impiega 600 operai per volta e che consente il normale rifornimento d'acqua a tutta la Regione Pugliese, si prega codesta Commissione voler esaminare benevolmente e con cortese urgenza la richiesta avanzata dall'Ente suddetto.

Si resta in attesa di cortesi notizie al riguardo.

p. IL MINISTRO
(firma illegibile)

2292

T R A N S L A T I O N

=====

The "Ente Autonomo Acquedotto Pugliese" (Water supply in Apulia) has requested from this Ministry 50 quintals of calcium carbide in order to have illuminated the principal channel for maintenance work, done by 600 workers.

The length of the above channel is about 100 Km. and it supplies water to the entire Apulia region. Therefore this Ministry kindly requests Industry & Commerce Sub-Commission to consider the requested supply of calcium carbide.

o=o=o=o=o=o=o=o

ADVANCE HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWV/ce

ACG/062/PWU.

5 Jul 44

Subject: Capua Water Supply.

To : Regional Engineer Officer Region III.

You are aware of the works which were lately put in hand for the improvement of the CAPUA water supply. Previously the matter has been handled from H.Q. and the work has been inspected by Maj. Westwood. As this is no longer practicable, will you please ~~here~~^{make} an early inspection, and submit a brief report to this office on the progress of the work.

It was expected that the water tower at the Barracks near S.Maria C.V. would be completed and connected to the existing rising main (in the CAPUA-S.MARIA road) by about 4 July, and that after allowing a few days for sterilization would be in operation by about 10 July. Will you please report on the present state of progress of that portion (a) of the scheme, and also let us know what progress has been made with (b) the re-habilitation of the permanent electrical equipment at the pumping station, and (c) the installation of interconnected suction pipes in two of the six new wells, and a delivery pipe to the existing rising main, for the purpose of bringing a portable pump rapidly into use in the event of breakdown of the pumping station.

The work is under the direction of Ing.A.BARONE, of the Genio Civile, CASERTA. It is, therefore, suggested that you confer with him before making your inspection.

W.M. LAPPER
Lieut-Colonel
Chief, Util. & ~~Admin.~~ Div.

ADVANCE HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WVW/oe

ACC/062/PWU.

5 Jul 44

Subject: Cast Iron and Steel Water
Pipes and Fittings.

To : Regional Engineer Officer, Region III.

We have been informed by the Industry and Commerce Sub-Commission that large stocks of steel and cast iron pipes and fittings are lying in the basement magazine of the CISA VISCOSA plant at NAPLES. In view of the extensive need of stores for the re-habilitation of water supplies throughout liberated Italy, will you please arrange for an engineer to visit the aforesaid location and prepare an accurate inventory for submission to this Headquarters, as soon as possible. An adequate description of the pipes and fittings should be given, please, including (a) the material, (b) the internal diameter, (c) the wall thickness, (d) the length, (e) the type of joints, (f) whether coated and/or lined and, if so, with what, (g) the test pressure, if known.

We are informed, that the CISA VISCOSA plant is under the control of P.B.S. (Engineers). Please contact Maj. MacDonald of that Formation before making an inspection.

Your early reply will be appreciated.

W.M. LAPPER,
Lieut-Colonel
Chief, Util. & Admin. Div.

*Reviewed
area 7 Sept 44
17 Nov
2288
14 Sep 44*

NOTE re attached bill:

I endorsed a duplicate copy of ^{specimen} this bill as follows, and handed it to Comm. Tibb on 20 June 44:-

"I agree that this bill has been prepared and calculated in accordance with the temporary surcharge approved by the Allied Control Commission for inclusion in the August bills.

R. W. WESTWOOD

MAJOR, R.E.


for W.M. Laffer,
Lieut. Colonel,

Chief Econ. and Finance Div.

20 June 1944

It is to be noted that the 10% addition that is made 2287 behalf of the Commune has been calculated on the new temporary

rate (i.e. the base rate plus the authorized surcharge). In the first place I questioned the propriety of this, but after examination of the agreements between the Comins and the Company, and after discussion with Lt. Col. Rapper, it was decided to allow the procedure to stand. Various factors were taken into consideration, including the important fact that a precedent had already been created in the May Billing.

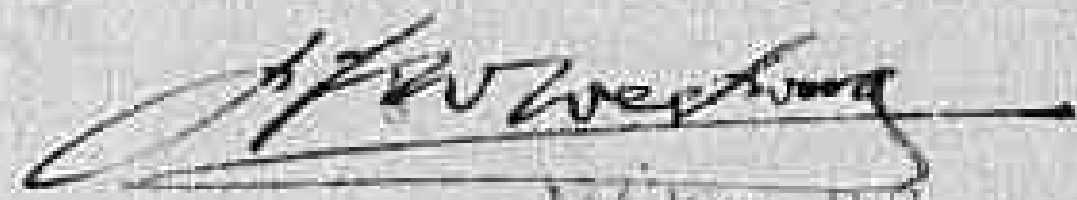
MAJOR, R.E.

22 June 44

Contratto Località		179202 P A VIA S. LUCIA 110 C 1° PIANO DES. 3		RUOLO N. 52097		ACQUEDOTTO I SOCIETÀ PER AZI CON SEDE IN N CAPITALE L. 70.455.000 INTERA C. P. E. Napoli N. 1	
Abbonato Domicilio dichiarato Cauzione		RISI EMMA ERNESTINA VIA G. BAUSAN 36		Sezione S. Ferdinando		VIA COSTANTINOPOLI Telefono int. N. 50.554 - Telegrammi: ACO	
		LG 300		SCADENZA DEL 23 4 MAGGIO 1944 30 GIUGNO		4/8-3/17/44	

LETTURA CONTATORI				CONSUMO MC	MINIMO TRIMESTRALE MC	ECCEDENZA DI CONSUMO MC	ECCEDENZA		CANONE TRIMESTRALE		Importo Geometri sulle Es Lire
Precedente		Attuale					Importo acqua comprensivo di manuten. imp., nolo e manut. app. Lire	Aumento Comunale nuovi lavori (10%) Lire	Minimo contrattuale comprensivo di manut. imp., nolo e manut. app. Lire	Aumento Comunale nuovi lavori (10%) Lire	
Data	Cifra	Data	Cifra								
4.2	609	4.5	639	30*	27	3*	9 15	0 90	63.18	6.31	1
In questa bolletta è incluso un temporaneo soprapprezzo del 200% autorizzato per mettere la Società in grado di sostenere l'aumentato costo di esercizio in periodo di emergenza. MED. 50-A-165000-4-44											
Legenda: MED. Cifra interpolata o con uno calcolato. CH. Chiuso. LINE. Lettura non eseguita.				Per i rapporti con la Società indicare sempre il numero del contratto ed il numero di ruolo.		Tutti i pagamenti debbono farsi alla Cassa della Società in Via Costantinopoli n. 98.		Con riserva di esigere il retrogrado giacché la prima prova nel pagamento.		TOTAL	



A S. LUCIA 110 PIANO DES. 3		RUOLO N. 52097		ACQUEDOTTO DI NAPOLI SOCIETÀ PER AZIONI CON SEDE IN NAPOLI CAPITALE L. 70.455.000 INTERAMENTE VERSATO C. P. E. Napoli N. 14143 VIA COSTANTINOPOLI, 98 Telefono int. N. 50.554 - Telegrammi: ACQUEDOTTO - NAPOLI 4/8-3/11/44				
SI EMMA ERNESTINA A G. BAUSAN 36		Sezione S. Ferdinando						
LG 300		SCADENZA DEL 23 4 MARZO 1944 23 AGOSTO						
CONSUMO MC	MINIMO TRIMESTRALE MC	ECCEDENZIA DI CONSUMO MC	ECCEDENZIA		CANONE TRIMESTRALE		Imposta Generale sulle Entrate Lire	TOTALE Lire
			Importo acqua comprensivo di manuten. imp., nolo e manut. app. Lire	Aumento Comunale nuovi lavori (10%) Lire	Minimo contrattuale comprensivo di manut. imp., nolo e manut. app. Lire	Aumento Comunale nuovi lavori (10%) Lire		
30*	27	3*	9 15	0 90	63.18	6.31	1 60	81.18
					64.00	6.40		82.05*
			PER QUIETANZA IL CASSIERE				Penale ed accessori . . .	
					TOTALE L.			
Per i rapporti con la Società indicare sempre il numero del contratto ed il numero di ruolo.			Tutti i pagamenti debbono farsi alla Cassa della Società, in Via Costantinopoli n. 98.			Con riserva di esigere qualunque credito ar- retrato giacché la presente bolletta non costi- tuisce prova nel pagamento della rate.		

RUOLO N.

52000

Sezione S. Ferdinando

SCADENZA DEL
4 MAGGIO 1944

2

ACQUEDOTTO DI NAPOLI

SOCIETÀ PER AZIONI

CON SEDE IN NAPOLI

CAPITALE L. 70.455.000 INTERAMENTE VERSATO
C. P. E. Napoli N. 14143

VIA COSTANTINOPOLI, 98

Telefono int. N. 50.554 - Telegr. ACQUEDOTTO NAPOLI

4/8-3/11/44


ECCEDENZA		CANONE TRIMESTRALE		Imposta Generale sulle Entrate	TOTALE
Importo acqua comprensivo di manuten. imp., solo e mant. app. Lire	Aumento Comunale nuovi lavori (10%) Lire	Minimo contrattuale comprensivo di mant. imp., solo e mant. app. Lire	Aumento Comunale nuovi lavori (10%) Lire	Lire	Lire
9 75	0 90	64 00	6 40	1 60	82 05*
Penale ed accessori . . .					
TOTALE L.					

CONTROBOLLETTA
NON COSTITUENTE PROVA DI PAGAMENTO

This 1

This is a bill form, filled as specimen for the approval of the A.C.C.

ACQUEDOTTO DI NAPOLI
Il Direttore Amministrativo

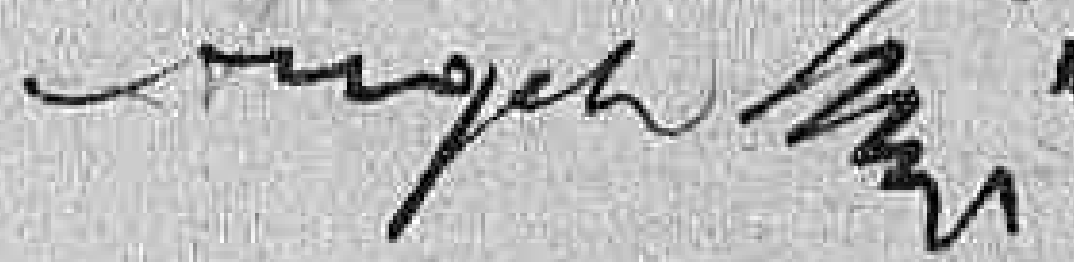

20/6/1944

ACQUEDOTTO DI NAPOLI
Società per Azioni con Sede in Napoli
Capitale L. 70.455.000 int. vers.
C. P. E. Napoli N. 14143
VIA COSTANTINOPOLI, 94

LE

Procedo

Data

4.2

AWWIS

ACQUEDOTTO DI NAPOLI
Società per Azioni con Sede in Napoli
Capitale L. 70.455.000 int. vers.
C. P. E. Napoli N. 14143

VIA COSTANTINOPOLI, 98
Tel. Int. N. 30 554
Telegrammi: Acquedotto - Nap.

Contratto
Località
Abbonato
Domicilio
dichiarato
Cauzione

179202

P. A. VIA S. LUCIA 110
C. 1° PIANO DES. 3MRS. MARIA ERNESTINA
VIA G. BAUSAN 36

RUOLO N.

Sezione S. Ferdinando

SCADENZA DEL
4 MAGGIO 1944
23

LETTURA CONTATORI

Precedente		Attuale		CONSUMO MC	MINIMO TRIMESTRALE MC	ECCEDENZA DI CONSUMO MC	ECCEDENZA	
Data	Cifra	Data	Cifra				Importo acqua comprensivo di manuten. imp., nolo e mant. app. Lire	Aumento Comunale nuovi lavati (10%) Lire
3.2	609	4.5	639	30*	27	3	9 15	0 90

AVVISO PER ECCEDENZA

Legenda

MED. Cifra interpolata o consumo calcolato.

CH. Chiuso.

LNE: Lettura non eseguita.

20/6/1944

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/md

ACC/062/PWU

13 June 1944

Subject: Water Rates.

To : Società Acquedotto di Napoli.

1. This letter is supplementary to our letter of 8th June 1944 which authorized the inclusion of certain surcharges in your August bills.

2. Consequent upon the representations personally made by Comm. Rag. Angelo Tibbò, when he called at this office today, the following confirmation is afforded of the interpretation that is to be placed on the authorization communicated in our letter of 8th June 1944.

3. In accordance with Articles 13 and 14 of the "Regolamento per la distribuzione dell'Acqua di Serino nel Comune di Napoli", the costs of rental and maintenance of meters and the cost of maintenance of service taps, etc. are NOT separately charged but are included in the basic rates (which embrace all such expenses on the basis of a fixed percentage).

Therefore, in your bills (of 4th August 1944) to consumers in the Comune of Naples, you are authorized to add the surcharge of 200% (already approved) to the existing basic rates which are inclusive of meter rent and maintenance charges.

4. It is to be understood, however, that in the case of bills relating to the sale of water in bulk to other Communes or to independent water supply undertakings, the surcharge of 160% (already approved) shall be applied only to charges (at existing basic wholesale rates) in respect of actual sales of

2283

60

water, and that the surcharge shall NOT be added to any charges in respect of rental and maintenance of meters or other installations.

W. M. LAXTER,
Lieut-Colonel,
Chief, Utilities & Ada. Div.

c/c. to:
Ministero Lavori Pubblici
Regional Commissioner, Region III,
Economic Section, I.C.C.,
P.B.S. Engineer Section.
File.

2284

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

59
HWW/in

ACO/062/PWU

8 June, 1944

Subject : Water Rates.

To : Società Acquedotto di Napoli.

1. We have carefully reviewed the data which you submitted to us in connexion with your application to increase Water Rates, and have arrived at the following conclusions.

2. In all bills rendered to consumers on the nominal date 4th August 1944 you are hereby authorised to add a temporary surcharge of not more than two hundred per cent (200%) to all retail charges and a temporary surcharge of not more than one hundred and sixty per cent (160%) to all wholesale charges. It is understood that the bills rendered on the nominal date 4th August 1944 in accordance with statutory regulations will include only the charges due in respect of the following:-

(a) Payments in advance for minimum chargeable consumption throughout the period 4th August 1944 to 3rd November 1944, both dates included;

(b) Payments in retrospect for excess consumption (i.e. over and above the minimum chargeable consumption) during the period 4th February 1944 to 3rd May 1944, both dates included.

3. "Retail charges" are hereby defined as relating to sales of water direct to the ultimate consumers. "Wholesale charges" are hereby defined as relating to sales of water in bulk either to municipal authorities or to independent water supply undertakings, for distribution by those authorities or undertakings to the ultimate consumers.

4. The surcharges may be applied only to charges which are directly in respect of actual sales of water. The surcharges shall not, therefore, be applied either to meter charges or to taxes collected from consumers.

5. The surcharge may be applied as a separate addition to the total amount of each bill for water (excluding taxes and meter charges) or, alternatively, it may be applied directly to the various component parts of the basic rates, it being understood that the basic rates shall remain unaltered and that no increase is to be made in the meter charge.

6. A notice must be delivered along with every bill rendered. The wording of the notices shall be in the following form:-

"Included in this bill is a temporary surcharge of * %. This surcharge has been authorized in order to enable the company to meet increased operating costs of the present emergency period."

* Here must be inserted the applicable percentage, either 200% or 150%.

7. Inasmuch as this action has been authorized in compliance with your request for additional revenues, under no condition shall any statement be made to your customers that the application of this surcharge has been ordered by the Allied Control Commission or the Allied Military Government.

8. You will send to this Sub-Commission an advance copy of a typical bill, together with a copy of the notice referred to.

c.c. to: Minist. Lavori Pubblici
Regional Commissioner Region III
Economic Section A.C.C.
File.

P.B.S. ENGR Section

W.M. LAYNER
Lt. Colonel,
Chief El. & Admin. Div

2282

57
HWW/hf

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

6 June 1944

ACC/062/FWU

Subject: Capua water supply.

To : Ing. A. Barone, Genio Civile, Caserta.

This letter places on record the agreement reached on Monday 5 June, between yourself and Major Westwood of this Sub-Commission, that either you or your contractors will arrange to transport, from the pumping station to the Barracks, the remaining 25 cast iron pipes (which you were unable to load on to the military transport on 4/5 June), provided that permission be granted for the use of a horse-drawn vehicle. Accordingly, this letter is written also with the additional purpose of certifying that the use of a horse-drawn vehicle will be necessary for the haulage of cast iron pipes during the period 8th to 25th June 1944, inclusive of both dates, between the following points on the CAPUA - S.MARIA road:-

- (a) The junction of the AVERSA road and the S.MARIA road immediately to the South of CAPUA.
- (b) The entrance to the Italian military barracks (now occupied by Allied Troops) situated between CAPUA and S.MARIA C.V.

W.M. LAPPER
Lieut-Colonel
Chief, Util. & Adm. Div.

2231

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/lp

ACC/062/PWU

3 June 1944

Subject: Water Rates.

To : Compagnia Imprese Condotte di Acqua
Acquedotto Vesuviano.

1. In reference to your letter (N°1017) of 25 May 1944:
2. After extensive discussions with Sig. ARBITRIO (your representative) at this office on 1st and 3rd June, we regret that this Sub-Commission cannot accede to your request for permission to levy a surcharge of 150% on bills rendered in respect of "excess" water consumption during the period 4th Nov. 43 to 3rd Feb. 44; but the surcharge already levied (in the February bills) to offset the 140% extra purchase cost of water from the Acquedotto di Napoli for the "excess" consumption during the period 4th Nov. 43 to 3rd Feb. 44 may be allowed to remain.
3. The specimen notice, submitted with your letter, is hereby approved for issue to all your customers in explanation of the computation of the bills rendered on 4th May (nominal date).
4. The specimen bill (N°1867), submitted with your letter, is considered to have been correctly calculated and prepared, provided that the amount deducted in respect of the unauthorized surcharge (on the "minimum" payment included in the corresponding bill of the 4th February) be 6.46 lire. The specimen calculation has been recorded in this office as follows:--

Minimo (at L.I. 9882)	15.24	} All relating to water consumed in the period 4th Feb. 44 to 3rd May 44.
I Eceed. (at L.I. 1902)	3.57	
II Eceed. (at L.I. 3402)	-----	
	<u>18.81</u>	

Surcharge on above at 150%

$$= 18.81 \times 1.5 = 28.21$$

Deduct: Unauthorised
surcharge included in
corresponding bill
of 4th Feb.

6.46
L. 21.75

nett surcharge in specimen bill
of 4th May.

W.M. LAPPER,
Lieut-Colonel,
Chief, Utilities & Adm.Div.

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

JFL/lp

25 April 1944

ACC/067/PWU

Subject: Water Rates.

To : Società Acquedotto di Napoli - Via Costantinopoli 98 -

1. On Jan. 12, 1944, Region III A.M.G. authorized your company to temporarily increase rates for water service.
2. The authority to temporarily increase rates is cancelled.
3. The cancellation order is effective on May 1st and applies to all bills submitted to your customers on and after that date.

L.A. JENNY,
Lt.-Col., C.E.,
Director.

This letter, originally in file 067 (now closed) is transferred to file 062. It is evident from other correspondence that this letter was not complied with, the bills of surcharge of 140% (now closed) authorized by the East letter in file 138 (now closed) dated 29 May 1944; viz. report from Mr. Kitchcock to the East letter, para 5 of said letter refers.

2278

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

HWW/lp

ACC/062/PWU

3 June 1944

Subject: Water Rates.

To : Compagnia Imprese Condotte di Acqua
Acquedotto Vesuviano.

1. In reference to your letter (N°1017) of 25 May 1944:
2. After extensive discussions with Sig. ARBITRIO (your representative) at this office on 1st and 3rd June, we regret that this Sub-Commission cannot accede to your request for permission to levy a surcharge of 150% on bills rendered in respect of "excess" water consumption during the period 4th Nov. 43 to 3rd Feb. 44; but the surcharge already levied (in the February bills) to offset the 140% extra purchase cost of water from the Acquedotto di Napoli for the "excess" consumption during the period 4th Nov. 43 to 3rd Feb. 44 may be allowed to remain.
3. The specimen notice, submitted with your letter, is hereby approved for issue to all your customers in explanation of the computation of the bills rendered on 4th May (nominal date).
4. The specimen bill (N°1867), submitted with your letter, is considered to have been correctly calculated and prepared, provided that the amount deducted in respect of the unauthorized surcharge (on the "minimum" payment included in the corresponding bill of the 4th February) be 6.46 lire. The specimen calculation has been recorded in this office as follows:-

Minimo (at L.I.0882)	15.24	{ } All relating to water consumed in the period 4th Feb. 44 to 3rd May 44.
I Eeced. (at L.I.1902)	3.57	
II Eeced. (at L.I.3402)	----	
	18.81	
	=====	

2277

00 52
Surcharge on above at 150%

$$= 18.81 \times 1.5 = 28.21$$

Deduct: Unauthorized
surcharge included in
corresponding bill
of 4th Feb.

<u>6.46</u>	
L. 21.75	nett surcharge in specimen bill of 4th May.

W.M. LAPPER,
Lieut-Colonel,
Chief, Utilities & Adm.Div.

S.P.A. IMPIRE CONDOTTE DI ACQUA
ACQUEDOTTO VESUVIANO

Resina, 25 Maggio 1944

Mod. 1 - 5000 - 8-1941

C.P.C. - N. 21577

U.I.F. - N. 22003

J.L.

ANNESSI

Mr. W.M. L A P P E R

Lt. Colonel

Chief El. & Adm. Div.

Sub Commission Public Works and Utilities

A.C.C.

N. 1017

N a p l e s

Subject: Water price.

Reference to your note of 17 th May concerning the authorization of increase of the 150 per cent, we take the liberty to submit to you the obstacles which come of by the applying of instructions contained in same note.

- 1) The revenues as by the accounts presented to you, as far as water is concerned, are represented by 323651.95 lire for the water consumed exceeding, since the 4th November 1943 to 3rd February 1944 and by 471179.50 lire for the compulsory minimum of water corresponding to the period 4th February - 3rd May 1944.
- 2) The ^{deficit} disbalance resulting from the accounts January - February and March 1944 is of 1.013.900.18 lire on the revenue of 794.831.47 lire only for water.
- 3) That Commission has authorized the increase of 150 per cent to cover the above resulting disbalance and for that reason the increase should to be applied, according n°2 of your note, to all our bills for water consumption issued on the 4th February 1944 which form the revenue amount.
- 4) The bills issued on the 4th February include the ^{retrospective} postponed cost of the ^{excess} water consumption since the 4th November to the 3rd February 1944, in surplus for 323.651.95 lire, and the advanced cost of the quantity of water as by contract since the 4th February to

the 3rd May 1944 for 471.179.50 lire.

- 5) Applying on the revenue as by the accounts for the three months of January - February and March 1944, the increase of the 150 per cent on the consumption effected in the three former months, as specifies n°4 of your note of 17 th May the Acqueduct, for this period, will collect the 150 per cent on 471.179.50 total amount of the quantity of water as by contract since 4th February to 3rd May 1944.
- 6) The remaining 323.651.95 lire, as represents the cost of the quantity of water consumed in exceeding since the 4th November 1943 to the 3rd February 1944, would your note n°4 exactly be interpreted, it would remain excluded from whatsoever increase.
- 7) Consequently the disbalance, acknowledged by that Commission in spite of the obtained increase, would still remain, for the period January-February and March 1944 of 485.478.00 lire, figure corresponding to the increase of the 150 per cent which you would not authorize to invoice on 323.651.95 lire.
- 8) After what above said, as that Commission after careful studies authorize the increase to cover quite the disbalance of last period, we dare insist requesting that the increase of 150 per cent be authorized on all the bills issued on 4th February this year.
- 9) Our request is supported also by the fact that, having this Acqueduct to pay to Naples Acqueduct, with the increase authorized for same of the 140 per cent the water purchased in surplus of that as by contract (exceeding) since 4th November to 3rd February 1944, it would set up the unbearable principle for us to acquire from Naples Acqueduct same quantity of water at a higher price than that of our sale to our inscribed people.
- 10) Consequently the necessity for the period 4th November 1943 - 3rd February 1944 (corresponding only to water consumed in exceeding) either to authorize the increase also for the Vesuvius Acqueduct, or to authorize the latter to pay to Naples Acqueduct without the increase that as already been allowed to that Acqueduct of 140 per cent.
- 11) Waiting for your decision, we enclose the notice that would be forwarded to the consumers and the typical bill of May 1944 by which appears

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
ACQUEDOTTO VESUVIANO



Resina, 25 Maggio 1944

Mod. 1 - 5000 - B-1941

C. P. C. - N. 21577

U. I. F. - N. 22003

ANNESSI

N. _____

that applying the dispositions of your notice of the 17 th May 1944, the increase is applied on the only part of the bill of February 1944 regarding the minimum consumption for 4 February to 3 May being without increase the consumption in excess of the same bill of February. *

Best regard.

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
 Il Rappresentante

Indirizzo Postale: Acquedotto - Resina
 Telefono: 55394

2426 - 28

* Para 11. There is misinterpretation of instructions.
 The waterworks may charge 150% extra on all payments
 in respect of water consumed in Feb, Mar & April,
 whether "paid in advance" or "paid in
 retrospect."

* Re para (2); it must be remembered
 that the Co. charged an extra 140% on
 the "excess" water consumed in May, Dec.
 and Jan. (but NOT on the Co's
 operating expenses) because they had had
 to pay that extra to the Naples waterworks Co.
A.C.C. is NOT asking the Co. to refund those extra.

ARBITRIO MASSIMO

227

AVVISO al Sig. _____

Via _____

N. _____

Comune di PORTICI

pel pagamento del Trimestre MAGGIO 1944

C. C. Poste 6/3825 - Telef. 55394 - U. I. F. N. 22003 - C. P. C. N. 21577

COMPAGNIA IMPRESE
ACQUEDOTTO

Polizza

2273

Mod. 24 - 340 - 3 - 1944

L. N. 2103 - C. P. C. N. 21577

22

Matricola	Rilievo		Quantità acqua mc.				I M P O R T O								
	In corso	Precedente	Consumata	Minimo	I. ecced.	II. ecced.	Minimo L. 1.0002	I. ecced. L. 1.1902	II. ecced. L. 1.3402	Nolo conduttore	Importo del afa	Rate Lavori	Riparaz. e Lavori	Postali e contratti	Diversi
843- 164	623	606	I7	I4	3		15.24	3.57		6.50	150				0.
							Arretrato 4/24/44 - 3/5/44				21.75				

Il controdistinto ammontare è pagabile nel quindici giorni dalla data apposta sul bollo del presente avviso di pagamento nonostante qualunque reclamo al quale sarà fatto ragione in seguito, se riconosciuto giusto. Trascorsi i suddetti quindici giorni l'abbonato incorrerà nella penale del 4 per cento sull'ammontare totale, salvo ogni altro provvedimento ed il diritto alla Compagnia di sospendere la somministrazione dell'acqua. I reclami debbono inviarsi per lettera alla Direzione in RESINA.

Bollo

Nel periodo di esazione l'Ufficio resterà aperto tutti i giorni, tranne i festivi dalle ore 9 alle 12.

Il controdistinto ammoniare è pagabile nel quindici giorni dalla data apposta sul bollo del presente avviso di pagamento nonostante qualunque reclamo al quale sarà fatto ragione in seguito, se riconosciuto giusto. Trascorsi i suddetti quindici giorni l'abbonato incorrerà nella penale del 4 per cento sull'ammoniare totale, salvo ogni altro provvedimento ed il diritto alla Compagnia di sospendere la somministrazione dell'acqua. I reclami debbono inviarsi per lettera alla Direzione in RESINA.

Nel periodo di esazione l'Ufficio resterà aperto tutti i giorni, tranne i festivi, dalle ore 9 alle ore 12.

Bollo

Mod. 24 - 540 - 3 - 1944

N.

AGGIO 1944

N. 22003 - C. P. C. N. 21577

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
ACQUEDOTTO VESUVIANO

Polizza

237

No

1867

acqua mo.

I M P O R T O

I. ecced.	II. ecced.	Minimo L. 1.0802	I. ecced. L. 1.1902	II. ecced. L. 1.3402	Nolo contatore	Aumento del c/a	Rate Lavori	Riparaz. e Lavori	Postali e controllo	Diversi	Bollo	TOTALE
3		15.24	3.57	.	6.50	150				0.100.50		47.66
												0.95
												48.61

Arretrato 4/24/44 - 3/5/44

21.75

Il controdistinto ammoniare è pagabile nei quindici giorni dalla data apposta sul bollo
 presente avviso di pagamento nonostante qualunque reclamo al quale sarà fatto ra-
 gione in seguito, se riconosciuto giusto. Trascorsi i suddetti quindici giorni l'abbonato
 correrà nella penale del 4 per cento sull'ammontare totale, salvo ogni altro prov-
 vimento ed il diritto alla Compagnia di sospendere la somministrazione dell'acqua.
 I reclami debbono inviarsi per lettera alla Direzione in RESINA.

Nel periodo di esazione l'Ufficio resterà aperto tutti i giorni, tranne i
 festivi, dalle ore 9 alle ore 12.

Bollo

Multa
imposta
entrata

N O T I C E

2272

A temporary surcharge of 150 per cent is included in this bill. This surcharge has been authorized on water consumption made in * months of February, March and April 1944 to make the Company able to balance the increased working charge of actual emergency period. The amount of arrear increase is:

- 1) Increase of minimum 4 February - 3 May 1944 invoiced with the bill of February 1944 reduced of the amount invoiced* in February 1944 for increase of water purchase in Naples on minimum.
- 2) Increase on consumption for excess 4 February - 3 May 1944 invoiced with bill of May 1944.

* 140% on that portion of the actual
related to purchase of water from Naples
Waterworks

AVVISO

Incluso in questa fattura c'è un temporaneo sopraprezzo del 150%.
Questo sopraprezzo è stato autorizzato sul consumo di acqua effettuato nei mesi di Febbraio, Marzo ed Aprile 1944 per mettere in grado la Compagnia di bilanciare l'aumentato costo di esercizio del presente periodo di emergenza.

La cifra di aumento arretrato rappresenta:

- 1) Aumento sul minimo 4 Febbraio - 3 Maggio 1944 fatturato sulla bolletta di Febbraio 1944, diminuito della somma fatturata a Febbraio 1944 per aumento di acquisto dell'acqua a Napoli sul minimo.
- 2) Aumento sul consumo per eccedenza 4 Febbraio - 3 Maggio 1944 fatturato sulla bolletta di Maggio 1944.

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
ACQUEDOTTO VESUVIANO



Resina, 25 maggio 1944

Mod. 1 - 5000 - 8-1941

C.P.C. - N. 21577

U. I. F. - N. 22003

ANNESSI

H.Q. Commissione Alleata di Controllo
 Sottocommissione Lavori Pubblici e Pubblica Utilità

N a p o l i

N. 1017

OGGETTO: Prezzi dell'acqua.

Riscontriamo Vostra del 17 maggio in riferimento all'autorizzazione di aumento del 150% e ci permettiamo sottoporre gli ostacoli che si presentano nell'applicazione delle disposizioni contenute nella nota stessa;

- 1) Le entrate di cui al rendiconto presentatoVi, per quanto riguarda la sola acqua, sono rappresentate da L. 323651,95 per acqua consumata (in eccedenza) dal 4 novembre 1943 al 3 febbraio 1944 e da Lire 471179,50 per quantitativo minimo obbligatorio di acqua relativo al periodo 4 febbraio 1944 al 3 maggio 1944.
- 2) Il deficit risultante dal rendiconto dei tre mesi gennaio, febbraio e marzo 1944 è di L. 1013900,18 sulla entrata di L. 794831,47 per sola acqua.
- 3) Cotesta Commissione ha autorizzato l'aumento del 150% per coprire il deficit come sopra risultante, e per tal ragione l'aumento dovrebbe essere applicato, secondo il n°2 della Vostra nota, a tutte le nostre fatture per consumo acqua emesse al 4 febbraio 1944 che formano il totale delle entrate.
- 4) Le fatture emesse al 4 febbraio comprendono il costo posticipato del consumo acqua dal 4 novembre al 3 febbraio 1944, in eccedenza, per lire 323651,95, e il costo anticipato della quantità contrattuale di acqua dal 4 febbraio al 3 maggio 1944 per L. 471179,50. 2273
- 5) Applicando sulle entrate di cui al rendiconto per i tre mesi gennaio febbraio e marzo 1944 l'aumento del 150% sul consumo effettuato nei

tre mesi precedenti, come specifica il n°4 della V/nota del 17 maggio, questo Acquedotto, per il detto periodo, incasserà il 150% su lire 47.117.950 totale importo della quantità contrattuale di acqua dal 4 febbraio al 3 maggio 1944.

- 6) Le rimanenti L.323651,95 poichè rappresentano il costo della quantità di acqua consumata in eccedenza dal 4 novembre 1943 al 3 febbraio 1944, se si interpreta esattamente il n°4 della Vostra nota, resterebbero escluse da qualsiasi aumento.
- 7) Quindi, il deficit, riconosciuto da Cotesta Commissione, malgrado l'aumento ottenuto, resterebbe per il periodo gennaio, febbraio e marzo 1944 ancora per L.485478,00 cifra che corrisponde all'aumento del 150% che non si autorizzerebbe a fatturare su L.323651,95.
- 8) Da quanto sopra, poichè Cotesta Commissione, dopo gli accurati studi autorizza l'aumento per coprire totalmente il deficit del periodo trascorso ci permettiamo; insistere nella richiesta che l'aumento del 150% venga autorizzato su tutta la fatturazione emessa al 4 febbraio corrente anno.
- 9) La nostra richiesta è convalidata anche dal fatto che, dovendo questo Acquedotto pagare all'Acquedotto di Napoli, con l'aumento ad esso autorizzato del 140% l'acqua acquistata in più di quella contrattuale (eccedenza) dal 4 novembre al 3 febbraio 1944, verrebbe a crearsi il principio insostenibile di dover noi acquistare dall'Acquedotto di Napoli la medesima quantità di acqua ad un prezzo superiore a quello di nostra vendita ai consumatori.
- 10) Conseguo la necessità, per il periodo 4 novembre 1943-3 febbraio 1944, relativamente alla sola acqua consumata in eccedenza, o di autorizzare l'aumento anche all'Acquedotto Vesuviano o di autorizzare quest'ultimo a pagare all'Acquedotto di Napoli senza l'aumento che è stato già autorizzato a quell'Acquedotto del 140%.
- 11) In attesa di V/decisione in merito, escludiamo l'avviso che sarebbe inviato ai consumatori e la fattura tipo di maggio 1944, dalle quali risulta che applicando le disposizioni della V/nota del 17 maggio 1944, l'aumento è applicato sulla sola parte della fattura di febbraio 1944

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
ACQUEDOTTO VESUVIANO



Resina, 25 maggio 1944
Mod. 1 - 5000 - 8-1941

C.P.C. - N. 21577

U. I. F. - N. 22003

ANNESSI

N. relativa al consumo minimo dal 4 febbraio al 3 maggio, rimanendp
escluso dall'aumento il consumo in eccedenza della stessa fattura di febbraio.

COMPAGNIA IMPRESE CONDOTTE DI ACQUA
Il Rappresentante

Ing. Giuseppe...

Indirizzo Postale: Acquedotto - Resina
Telefono: 55394

HEADQUARTERS
 ALLIED CONTROL COMMISSION
 Public Works and Utilities Sub-Commission
 APO 394

WAH/lp

17 May 1944

ACC/062/PWU

Subject: Water Rates.

To : Compagnia Imprese Condotte di Acqua Acquedotto Vesuviano. *RESINA*

1. We have carefully reviewed the data which you have submitted to us in connection with your application to increase Water rates, and have arrived at the following conclusion.
2. You are authorized to add a temporary surcharge of not to exceed one hundred fifty per cent (150%) to all consumer's bills.
3. The surcharge will not apply to taxes collected from the consumer.
4. The surcharge may be added to bills sent out on the nominal 4th May 1944 for water consumed in the approximately 3 months preceeding.
5. The surcharge may be applied as a separate addition to the total amount of all bills for water (excluding taxes) or, it may be applied directly to the various component parts of the basic rates, it being understood that the basic rates remain unaltered and no increase in the meter charge is to be made.
6. A notice must be delivered to consumers with all bills. This notice should read approximately as follows:
 "Included in this bill is a temporary surcharge of 150%. This surcharge has been authorized in order to enable the company to meet increased operating costs of the present emergency period."
7. Inasmuch as this action has been authorized in compliance with your request for additional revenues, under no conditions shall any statement be made to your customers that the application of this surcharge has been ordered by the Allied Control Commission or the Allied Military Government.
8. You will send to this Sub-Commission an advance copy of a typical bill with a copy of the notice referred to.

2263

c.c. to: Minist. Lavori Pubblici.
 Regional Commissioner Region III
 Controller of Property Reg. III.
 Economic Section ACC.
 File.

W.M. LAPPER,
 Lt. Colonel, .,
 Chief El. & Adm. Div.

FILE

48

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

HWW/in

ACC/062/PWU

1st June 1944

Subject : CAPUA Water Supply

TO : Lt.Col. W.M. Lapper, Chief of Public Utilities,
& Admin.Div. of Public Works Sub-Commission ACC.

From : Major H.W. Westwood, R.E.

The subject was initiated by letter 3155/DW dated 17 May 44, from the D.W., A.A.I., to C.E. No. 3 District; copy to H.Q., A.C.C., Public Works & Utilities Sub-Commission.

The following is my abbreviated report on the progress of the matter to date:-

After technical consideration of the proposals put forward, I agree that the scheme is practicable and economical, but I am not in a position to comment authoritatively upon its alleged urgency. As the existing system is functioning satisfactorily and is supplying ample water to the S.M.E., the RETD (Gibraltar Barracks) and the town of CAPUA, I have some personal doubts about the importance of the work.

The principal defect of the present improvised water supply system is the likelihood of failure of electric power supply to the pumping station, there being no storage whatsoever for the town and only 12,800 gallons at the S.M.E. and 12,800 gallons at the R.E.T.D. The water tower which is now intended to be completed and brought into use has, however, a capacity of only 110,000 gallons, or about one

2 No. 3 tanks arranged for 0900 hrs. Monday 5 June. They
 are being supplied by 10 C.R.C. tanks at request of Mr. H.W. (ACC/062/3155)
 H.W. Westwood 5 June.

Major Westwood

2268

Good, please pass Major H.W. Westwood
 Supply for Transport. Tell him that 1900
 tanks have had to be sent forward to assist
 in refugee problems. H.W.

147
eighth of the present daily water consumption, and could not, therefore, replace the pumped supply during more than a brief hiatus in the electric power.

On 24 May 44, I visited CAPUA and CASERTA. I called on LT.Col.W.A.R.Smith, R.E., who personally conducted me over the water works. I also called on the Cmdt. of the S.M.E., the P.O. of CAPUA, the D.C.R.E. CAPUA, and the deputy engineer of the Comune of CAPUA.

Of the required works, scheduled in the above mentioned letter, A.C.C. are requested to deal with the following four items:-

1. Completion of the water tower at the Barracks (capacity 500 cub. metres).
2. The laying of a 200 m/m dia. C.I. main through the Barracks, to connect the water tower with the existing rising main in the CAPUA - S.MARIA road.
3. Re-habilitation of the original electrical equipment (transformer sub-station and control panel) at the Pumping station. (The plant is at present operating on temporary equipment).
4. The installation of suction and delivery mains from two wells of the new group, in order that a type "A" pump might be rapidly connected and brought into temporary use in the event of failure of the existing pumping station.

The provision of an additional tank at the R.E.T.D., and of an additional tank and chlorinator at the S.M.E., will be undertaken by the D.W.

On 25 May, I called at the office of the Genio Civile, CASERTA. Ing. Virno explained that the civil scheme was in the hands of Ing. Barone, who would call upon me at H.Q. the following morning. Ing. Barone duly called

on 26 May, and brought with him plans and technical data. In the afternoon I accompanied Lt.Col. Lapper to the office of Lt.Col. Hensley, Public Works Officer of Region 3, to discuss the acceleration of the work,

It having been generally agreed that the original contractors should re-commence work on Monday, 29 May, I visited CAPUA and CASERTA again on 30 May. Work had not been started. On returning to this H.Q., I learned that Ing. Barone had called in my absence, to say that funds had been secured and that all materials were available (partly in NAPLES and partly in CAPUA) but that the work was held up for want of transport to convey the stores to the barracks.

yesterday After discussing the position with Lt.Col. Lapper ~~this~~ morning, I called on Major Fitzgerald (in the absence of Lt.Col. Hensley, Public Works Officer of Region 3) and asked if he could arrange to furnish the necessary transport. He explained that out of 200 trucks which were at the disposal of Region 3 until a few days ago, 160 have now been taken for use in military operations. The Public Works Branch of Region 3 is, therefore, unable to help, and it is suggested that the C.E., 3rd District, should be asked to furnish the transport, especially as the works are required primarily as a military need.

11/24 ~~30~~ ⁶ tons of materials have to be transported from NAPLES to the Barracks (situated between CAPUA and S.MARIA) and ~~30~~ tons from CAPUA to the Barracks.

11/24 ³⁰ I would remark that the engineers of the Genio Civile, CASERTA, have acted energetically and speedily in this matter and that I personally hope their efforts will not be nullified for want of the relatively small amount of transport necessary.

H.W. Westwood
H.W. WESTWOOD
Major R.E.

2266

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

45
HWW/in

1st June 1944

Subject : CAPUA Water Supply

TO : Lt.Col. W.M. Lapper, Chief of Public Utilities,
& Admin.Div. of Public Works Sub-Commission ACC.

From : Major H.W. Westwood, R.E.

The subject was initiated by letter 3155/DW dated 17 May 44, from the D.W., A.A.I., to C.E. No. 3 District; copy to H.Q., A.C.C., Public Works & Utilities Sub-Commission.

The following is my abbreviated report on the progress of the matter to date:-

After technical consideration of the proposals put forward, I agree that the scheme is practicable and economical, but I am not in a position to comment authoritatively upon its alleged urgency. As the existing system is functioning satisfactorily and is supplying ample water to the S.M.E., the RETD (Gibraltar Barracks) and the town of CAPUA, I have some personal doubts about the importance of the work.

The principal defect of the present improvised water supply system is the likelihood of failure of electric power supply to the pumping station, there being no storage whatsoever for the town and only 12,800 gallons at the S.M.E. and 12,800 gallons at the R.E.T.D. The water tower which is now intended to be completed and brought into use has, however, a capacity of only 110,000 gallons, or about one

44

eighth of the present daily water consumption, and could not, therefore, replace the pumped supply during more than a brief hiatus in the electric power.

On 24 May 44, I visited CAPUA and CASERTA. I called on LT.Col.W.A.R.Smith, R.E., who personally conducted me over the water works. I also called on the Cmdt. of the S.M.E., the P.O. of CAPUA, the D.C.R.E. CAPUA, and the deputy engineer of the Commune of CAPUA.

Of the required works, scheduled in the above mentioned letter, A.C.C. are requested to deal with the following four items:-

1. Completion of the water tower at the Barracks (capacity 500 cub. metres).
2. The laying of a 200 m/m dia. C.I. main through the Barracks, to connect the water tower with the existing rising main in the CAPUA - S.MARIA road.
3. Re-habilitation of the original electrical equipment (transformer sub-station and control panel) at the Pumping station. (The plant is at present operating on temporary equipment).
4. The installation of suction and delivery mains from two wells of the new group, in order that a type "A" pump might be rapidly connected and brought into temporary use in the event of failure of the existing pumping station.

The provision of an additional tank at the R.E.T.D., and of an additional tank and chlorinator at the S.M.E., will be undertaken by the D.W.

On 25 May, I called at the office of the Genio Civile, CASERTA. Ing. Virno explained that the civil scheme was in the hands of Ing. Barone, who would call upon me at H.Q. the following morning. Ing. Barone duly called

43

on 26 May, and brought with him plans and technical data. In the afternoon I accompanied Lt.Col. Lapper to the office of Lt.Col. Hensley, Public Works Officer of Region 3, to discuss the acceleration of the work,

It having been generally agreed that the original contractors should re-commence work on Monday, 29 May, I visited CAPUA and CASERTA again on 30 May. Work had not been started. On returning to this H.Q., I learned that Ing. Barone had called in my absence, to say that funds had been secured and that all materials were available (partly in NAPLES and partly in CAPUA) but that the work was held up for want of transport to convey the stores to the barracks.

yesterday After discussing the position with Lt.Col. Lapper ~~this~~ morning, I called on Major Fitzgerald (in the absence of Lt.Col. Hensley, Public Works Officer of Region 3) and asked if he could arrange to furnish the necessary transport. He explained that out of 200 trucks which were at the disposal of Region 3 until a few days ago, 160 have now been taken for use in military operations. The Public Works Branch of Region 3 is, therefore, unable to help, and it is suggested that the C.E., 3rd District, should be asked to furnish the transport, especially as the works are required primarily as a military need.

from ⁶ ~~30~~ tons of materials have to be transported from NAPLES to the Barracks (situated between CAPUA and S.MARIA) and ~~5~~ tons from CAPUA to the Barracks.

from ³⁰ I would remark that the engineers of the Genio Civile, CASERTA, have acted energetically and speedily in this matter and that I personally hope their efforts will not be nullified for want of the relatively small amount of transport necessary.


H.W. WESTWOOD
Major R.E.

2263

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WAM/lp

AGC/062/PWU

17 May 1944

Subject: Water Rates.

To : Società Appalti Industria Manifatti Esercizi.
(SAIME) Pozzuoli.

1. We have carefully reviewed the data which you have submitted to us in connection with your application to increase water rates, and have arrived at the following conclusion.

2. You are authorized to add a temporary surcharge of not to exceed two-hundred per cent (200%) to all consumer's bills.

3. The surcharge will not apply to taxes collected from the consumer.

4. The surcharge may be added to bills sent out as on the 4th May 1944 for water consumed in the approximately 3 months preceeding.

5. The surcharge may be applied as a separate addition to the total amount of all bills for water (excluding taxes) or, it may be applied directly to the various component parts of the basic rates, it being understood that the basic rates remain unaltered and no increase in the meter charge is to be made.

6. A notice must be delivered to consumers with all bills. The notice should read approximately as follows:

"Included in this bill is a temporary surcharge of 200%. This surcharge has been authorized in order to enable the company to meet increased operating costs of the present emergency period."

7. Inasmuch as this action has been authorized in compliance with your request for additional revenues, under no conditions shall any statement be made to your customers that the application of this surcharge has been ordered by the Allied Control Commission or the Allied Military Government.

8. You will please send to this Sub-Commission an advance copy of a typical bill, with a copy of the notice referred to.

2262

c.c. to: Minist. Lavori Pubblici.
Regional Commissioner Reg. III
Economic Section AGC.
File. ✓

H.A. JENNY,
Lt-Col., C.E.,
Director.

C O P I A



MINISTERO DEI LAVORI PUBBLICI
ISPETTORATO SUPERIORE DEL GENIO CIVILE CON SEDE IN NAPOLI
UFFICIO DEL GENIO CIVILE DI CASERTA

Caserta, 12 aprile 1944

All'ISPETTORATO SUPERIORE DEL
GENIO CIVILE CON SEDE IN

N. 1267 di Prot. - Sez.

Allegati N.

Risposta al Foglio del

N. Div. Sez.

N A P O L I

OGGETTO Danni bellici - Lavori completamento e ripara-
zioni del serbatoio pensile in prossimità delle Caser-
me tra S. Maria e Capua ed allacciamento del serbatoio
stesso alla rete di distribuzione di Capua.-

E' noto che per l'approvvigionamento idrico di Capua e della zona tra S. Maria e Capua erano in corso alcune opere all'atto della occupazione Alleata.

Il serbatoio pensile di Capua, destinato a funzionare da compenso nei consumi della rete di Capua, ed a costituire una riserva, in caso di mancanza di corrente, fu fatto saltare dalle fondamenta dalle truppe tedesche in ritirata.

L'impianto di sollevamento e la rete di distribuzione di Capua è stata già da tempo riattivata ed ora funziona; ma naturalmente l'acqua viene a mancare ad ogni interruzione di corrente, interruzioni non rare, date le attuali condizioni delle linee di trasporto e di produzione di energia elettrica.

Ad ovviare a tale inconveniente si è pensato, di accordo col Sig. Major F.R. Oxenham O.C. 360 Works Suzion R.E. di allacciare alla rete, attraverso la condotta di alimentazione delle Caserme tra S. Maria e Capua, l'altro serbatoio pensile costruito in pros-

./.

N. B. - Si prega d'indicare nella risposta il numero e la sezione della presente.

simità delle Caserme stesse.

A tale scopo occorre eseguire alcuni lavori di completamento e di riparazione al serbatoio e la condotta in ghisa del diametro di 200 m.m. di allacciamento.


Tali opere sono previste nell'acclusa perizia dello importo di L.525.000.00.

Per quanto riguarda l'esecuzione dei lavori in una recente visita fatta a Napoli insieme al Major Oxenham sono state interpellate le ditte RIVELLI che ha eseguiti gli altri lavori e che dispone delle impalcature, e la Soc.Acquedotto Serino e S.I.C.I. che dispone dei materiali occorrenti per la esecuzione dei lavori: le suddette Società si sono dichiarate disposte ad eseguirli e pertanto si propone di affidare la esecuzione dei lavori alle ditte stesse.-

p. L'INGEGNERE CAPO

f° C.Ruggeri

per copia conforme

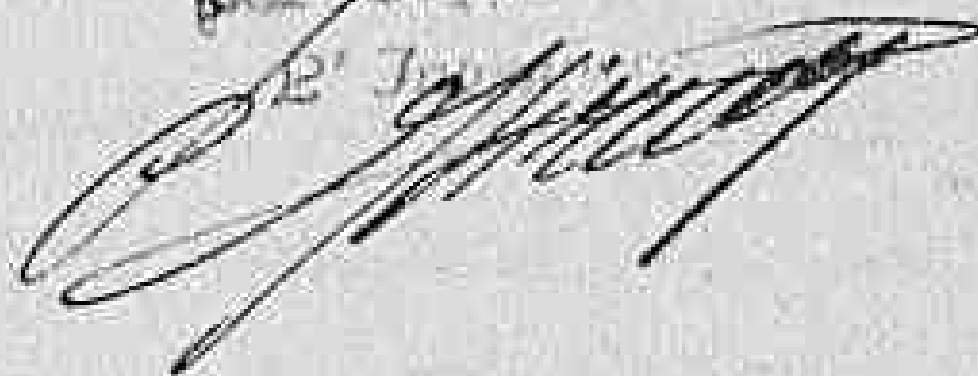

Allegato N.

Mod. N. 9
Art. 26 del RegolamentoMINISTERO DEI LAVORI PUBBLICI
ISPETTORATO SUPERIORE DEL GENIO CIVILE CON SEDE IN NAPOLI

UFFICIO DEL GENIO CIVILE DI CASERTA

Provincia di NAPOLI

Ufficio di CASERTA

Opere di competenza del Ministero dei Lavori Pubblici

(Legge DANNI BELlici)

~~Progetto~~ Perizia dei lavori di completamento e riparazione del
serbatoio pensile in prossimità delle caserme tra S. Maria e Capua ed
allacciamento del serbatoio stesso alla rete di distribuzione di Capua.

IMPORTO L. 525.000.00

Addi: 12 Aprile 1944

Visto: L' INGEGNERE CAPO

Redatto dall' Ingegnere di 2269

Provincia di NAPOLI

Ufficio di CASERTA

Opere di competenza del Ministero dei Lavori Pubblici

DANNI BELLICI

(Legge

)

Progetto perizia dei lavori di completamento e riparazione del

serbatoio pensile in prossimità delle caserme tra S. Maria e Capua ed

allacciamento del serbatoio stesso alla rete di distribuzione di Capua,

IMPORTO L. 525.000.00

Add: 12 Aprile 1944

Visto: L' INGEGNERE CAPO

Redatto dall' Ingegnere di 2283

F. A. Ruggieri C.

F. A. Ruggieri






Per copia Contorno

[Signature]

Caserta - Tip. E. Farina

MAPS AND CHARTS TOO LARGE TO FILM
ON ONE EXPOSURE ARE FILMED CLOCKWISE
BEGINNING IN THE UPPER LEFT CORNER,
LEFT TO RIGHT, AND TOP TO BOTTOM.

SEE DIAGRAMS BELOW.

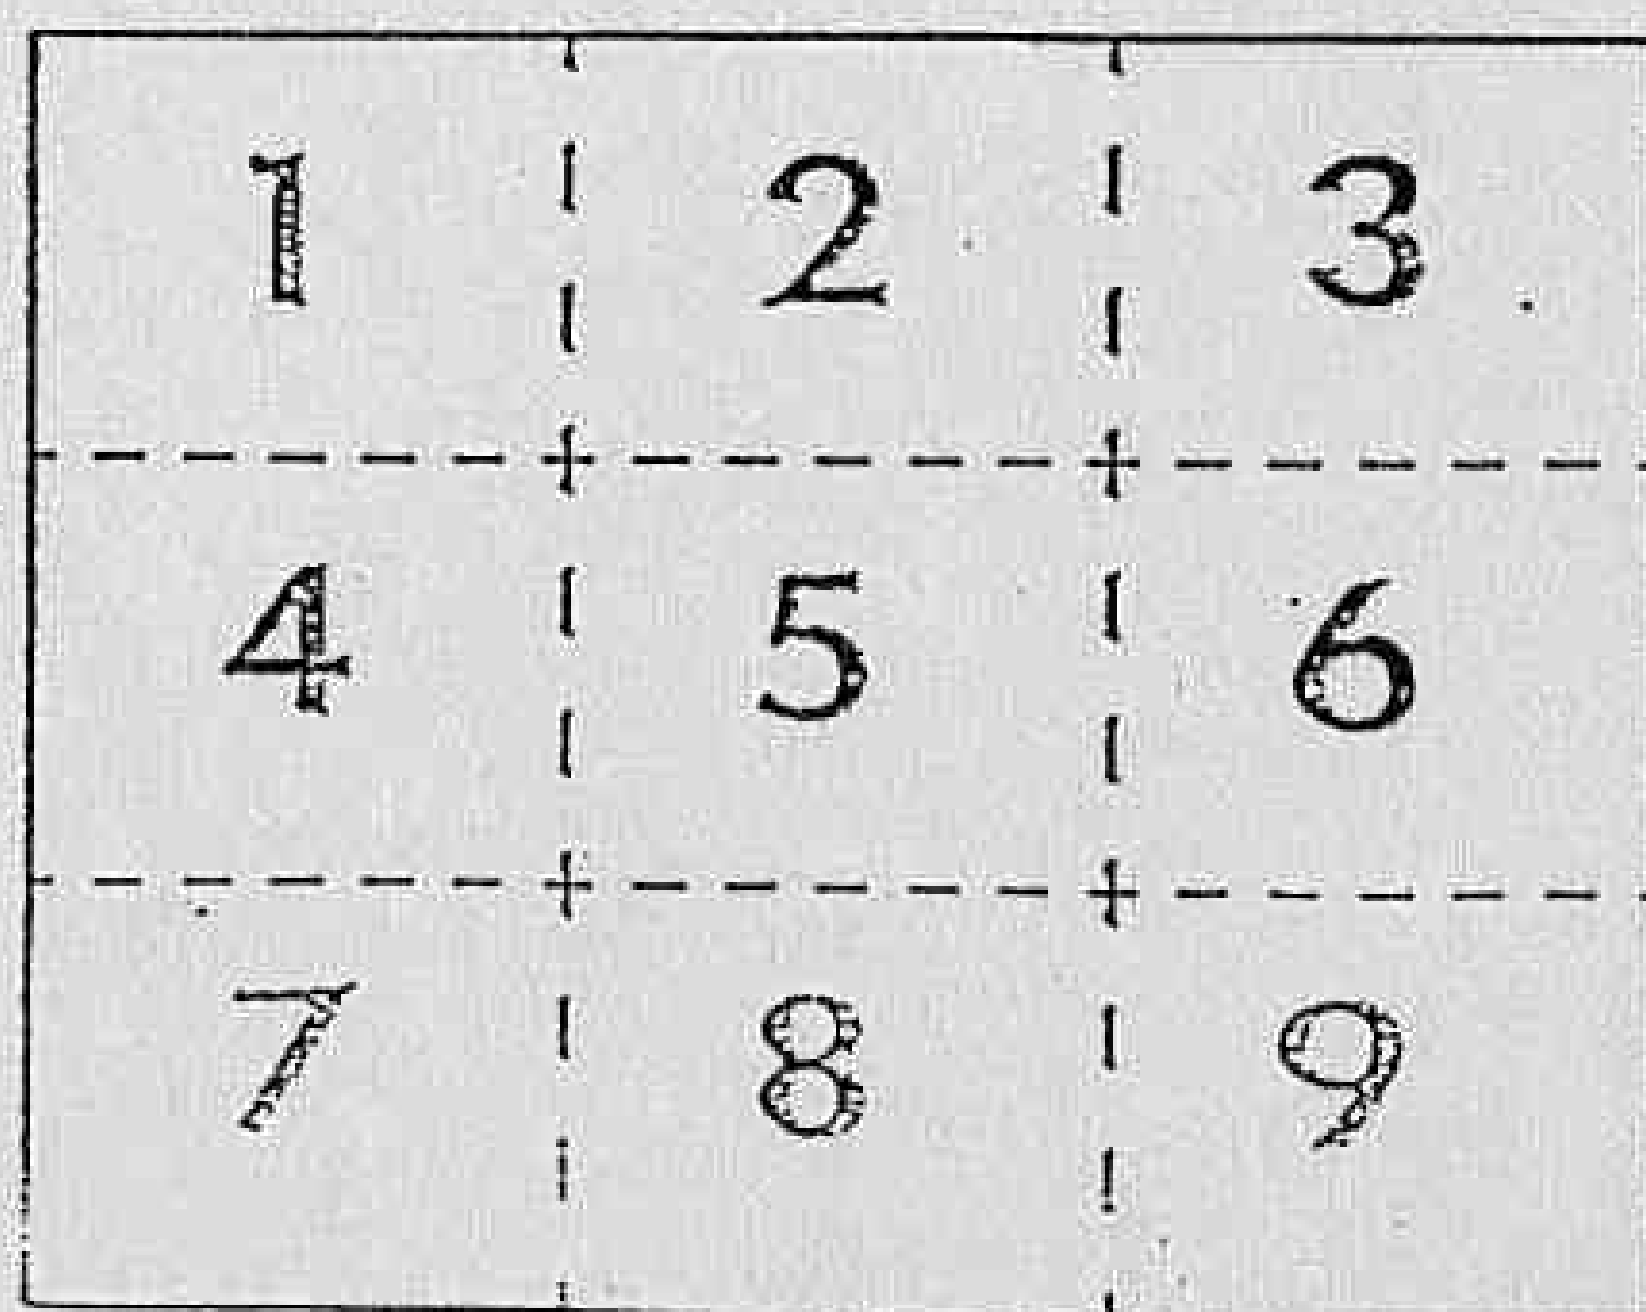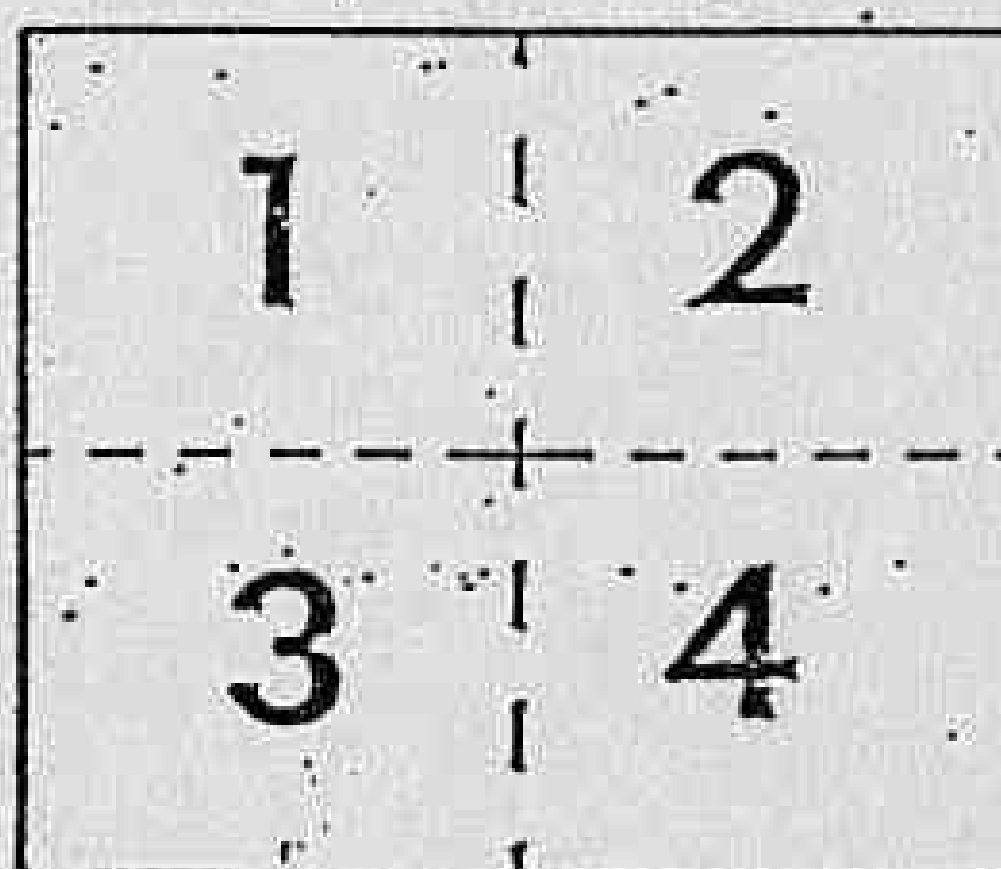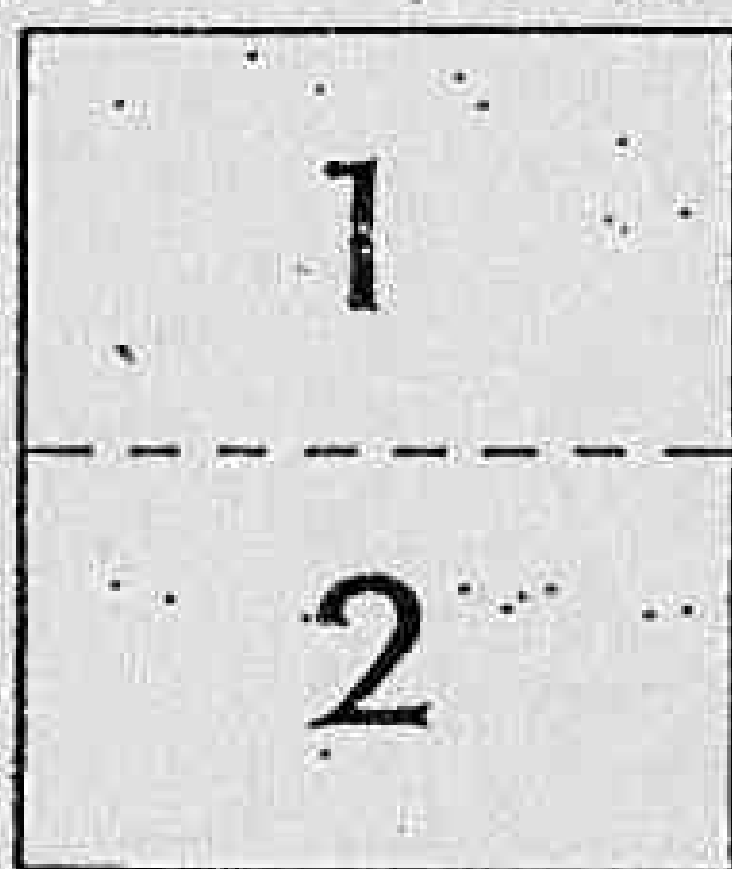

N° d'ordine	INDICAZIONE DEI LAVORI E DELLE PROVVISTE	LENGTH LUNGHEZZA	WIDTH LARGHEZZA	HEIGHT ALTEZZA	QUANTITÀ	Numero corri- spon- dente delle analisi	PREZZO
	A) Lavori a Misura						
1	Intonaco di cemento per le parti esterne del serbatoio compresi anditi a stima mq.				300==		
2	Intonaco civile a stucco per l'in- terno del locale e pinterreno a stima mq.				400,00		
3	Pavimento di piastrelle di cemento comprese per il locale a piano terra, compresa la formazione del sottofondo e tutto quanto neces- sario per dare l'opera compiuta mq. $\Pi \times 5,10^2 = 116,80$				11680		
4	Telai a vetro di legno castagno dello spessore di 5 cm. completi in opera, compreso gli scuretti in legno abete dello spessore di $\varnothing$ 3 cm. a doppio riquadro e spec- chiatura ferramenta serratura imprimitura ad olio 2	1,00		2,00	400		

2	Intonaco civile a stucco per l'interno del locale a pinterreno a stina	mq.					400,00		
3	Pavimento di piastrelle di cemento compresse per il locale a piano terra, compresa la formazione del sottofondo e tutto quanto necessario per dare l'opera compiuta	mq. $\Pi \times 5,10^2 = 116,80$					11680		
4	Telai a vetro di legno castagno dello spessore di 5 cm. completi in opera, compreso gli scuretti in legno abete dello spessore di 3 cm. a doppio riquadro e specchiatura ferramenta serratura imprimitura ad olio	2	1,00			2,00	400		
5	Per porta a doppia partita in legno castagno dello spessore di 5 cm. con doppia specchiatura, completa in opera compreso ferramenta serrature, stuccatura ed imprimitura ad olio	mq.	1,50			300	450		
	A riportare								

400,00

11680

2.00

400

300

450

N. d'ordine	INDICAZIONE DEI LAVORI E DELLE PROVVISTE	LENGTH LUNGHEZZA	WIDTH LARGHEZZA	HEIGHT ALTEZZA	QUANTITÀ
	RIPORTO				
6	Vetri in opera mq.				400
7	Coloritura ad olio a doppia passata degli infissi mq.				1700
8	Scavo e successivo rinterro per la posa di tubazioni, compreso il disfacimento del piano stradale e successiva ricomposizione	450,00	1,00	1,50	67500
9	Tubazione di ghisa in opera del diametro di 200 m/m ml.				45000
10	Pezzi speciali per la suddetta condotta Kg.				25000
11	Apparecchiatura idraulica e colonne montanti ecc. per il serbatoio pensile a stima L.				
12	Ferro lavorato per le scale alla marinara di accesso al serbatoio Kg. 31x13 =				40300
13	Per piccoli lavori di rifinitura				

Numero corrispondente delle analisi	PREZZO
	325 00
	80 00
	40 00
	600 00
	14 00
	30 00

50	67500	14000	27.000 00
	45000	600 00	270.000 00
	25000	14.00	3.500 00
			100.000 00
	40300	30 00	12.070 00
			16.080 00
			500.000 00
			25.000 00
			525.000 00

Caserta, li 12 Aprile 1944

Redatta dall'Ingegnere

Ing. A. Baroni

Visto: L'INGEGNERE CAPO

Ing. C. Ruggeri



[Handwritten signature]

45.00

18.000.00

150.00

17.520.00

1200.00

4.800.00

2259

1300.00

5.850.00

~~67.870.00~~

Pozzuoli Water Co.

Rate Increase of 140% allowed to Naples Water Co. reduced to 100% (April)

Cost of water - 244,000

Based on reduced rate = $244,000 \times \frac{200}{240} = 200,000$

Deficit reduced { $\begin{array}{r} 305,000 \\ 44,000 \\ \hline 261,000 \end{array}$

Revenue from sale of Water = 180,000

Surcharge = $\frac{261}{180} = 145\%$

Use - 150%

2258

Note: Increased taxes not considered,

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

12 May 1944

subject: SAIME (Pozzuoli Water Co.)

To : Lt-Col. J.S. Laboon.

1. The Societa Appalti Industria Manifatti Esercizi (SAIME) has submitted its report for the three months ending March 31 1944. The comparison with the estimate is shown in the attached sheet.

Based on the actual costs of operation there resulted a deficit of 305,035 L. to which should be added the additional taxes which will be levied on this amount should surcharge be allowed. The resulting deficit shows it necessary to increase the rate 192% of that now charge for water.

It is therefore recommended that the company be allowed the surcharge as estimated in report namely 200%.

W.A. HITCHCOCK
Major C.E.

Approved
for John F. Laboon
Lt Col. CMP
Joseph G. Rively
Capt., Inf.

copy to Lt. Col. Thompson

POZZUOLI WATER CO.

Operating Statement for period Jan. 1 1944 to March 31 1944

Income	Actual	Estimated
Sale of water	175,87	250,000
Interest	3,310	
Miscel	346,34	
Total	<u>217,815</u>	<u>250,000</u>
Production Expense		
Water Purchase	243813	310000
Distribution Expense	13530	360000
General Expense	83633	
Lapses	42000	63750
Interest	13000	11300
	<u>522850</u>	<u>745050</u>
Deficit	305035	
Add Tax	30000	
Deficit incl Tax	<u>335035</u>	<u>495050</u>
On increased rate		
surcharge recommend	<u>359742</u>	<u>500000</u>
	<u>24707</u>	<u>4950</u>

Increase necessary to offset loss on operation in 1954 of the charge for water.

This item includes value of the free water supplied to communes.

An additional tax of 8% on the increased rate to be paid and the communes.

Area 1% government tax month allword.

Alleg.
SOCIETÀ ANONIMA PER DERIVAZIONI DELLE
ACQUE DI S.TA MARIA DELLA FOCE ED ALTRE

Capitale versato L. 600.000 — Sede NAPOLI

C. P. E. C. N. 21513 - C/c. Postale N.º 6-1312

ACQUEDOTTO DI TORRE ANNUNZIATA

Napoli li 10 Maggio 1944

ALLIED CONTROL COMMISSION

Public Works and Utilities Sub-Commission

APQ 394

Sig. Lt. Col. C.M.P.

Jehn F. Labeen

O G G E T T O

Richiesta proroga consegna rendi-
cente. -

In relazione alla lettera 1º Maggio 1944 inviataci per la compilazione del rendiconto Gennaio - Febbraio - Marzo 1944, ci preghiamo comunicare Vi che per poter compilare il suddetto rendiconto e raccogliere tutti gli elementi relativi, abbiamo bisogno di una proroga del termine di 10 giorni fissato per poterlo ultimare. -

Vi preghiamo pertanto di volerci concedere una proroga di altri 10 giorni e sarà a cura nel caso potessimo consegnarle prima farlo pervenire a Codesta Commissione. -

SOCIETÀ ANONIMA PER DERIVAZIONI DELLE ACQUE
DI SANTA MARIA DELLA FOCE ED ALTRE
AL CAPO D'ORO

Extension granted.
H. Thompson

2253

SUBJECT: Water Supply - CAPUA

18 MAY 1944

Directorate of Works
HQ, AAI, CMF.

HEAVY QUARTERS

18 MAG 1944

A. C. C.

CE No. 3 District

3155/DW

17 May 1944

1. A scheme for improving the water supply to British Military Installations in the town of CAPUA has been approved under HQ AAI letter No. 2073/4/1/Q2 of 12 May 44.

2. The scheme was initiated through the Comd HQ SWE & RETD who has provided the relevant data on which the following technical instructions are based.

3. The system as originally planned consisted of two groups of tube wells situated near the junction of CASERTA - MAPLES road (MR 183773) from which it was intended to pump to two water towers, one in CAPUA Town and the other in the Barracks about 1 1/2 miles away on the CASERTA Road. From the water towers it was intended to gravitate to two independent distribution systems.

4. The present situation is that one group of wells which had been fully in operation, is now functioning reasonably well after having suffered considerable war damage. The other group was never completed. The Water Tower in CAPUA has been completely demolished and the Water Tower in the Barracks is about 90% complete. The system is working at present without a fixed head and with only a few Braithwaite Tanks installed in the SWE & RETD to serve as storage (total capacity - 25,600 gallons).

5. The estimated daily consumption of Military installations is as follows:-

SWE	27,000 galls per diem
RETD	40,000 galls per diem
RETD Extension	6,000 galls per diem
TOTAL	73,000 galls per diem

6. The Civil population is stated to be using 800,000 galls per diem. Without some accurate figures it is not possible to say whether this is a reasonable figure, but it would appear to be capable of considerable reduction without hardship. The first group of wells is stated to be using 800,000 galls per diem at present and there is a possibility of reducing this to 400,000 galls per diem.

1. A scheme for improving the water supply to British Military Installations in the town of CAPUA has been approved under HQ AAI letter No. 2073/4/1/Q2 of 12 May 44.
2. The scheme was initiated through the Comd HQ SAE & RETD who has provided the relevant data on which the following technical instructions are based.
3. The system as originally planned consisted of two groups of tube wells situated near the junction of CASERTA - NAPLES road (MR 183773) from which it was intended to pump to two water towers, one in CAPUA Town and the other in the Barracks about 1 1/2 miles away on the CASERTA Road. From the water towers it was intended to gravitate to two independent distribution systems.
4. The present situation is that one group of wells which had been fully in operation, is now functioning reasonably well after having suffered considerable war damage. The other group was never completed. The Water Tower in CAPUA has been completely demolished and the Water Tower in the Barracks is about 90% complete. The system is working at present without a fixed head and with only a few Draithwaite Tanks installed in the SAE & RETD to serve as storage (total capacity - 25,600 gallons).

5. The estimated daily consumption of Military installations is as follows :-

SAE	27,000 galls per diem
RETD	40,000 galls per diem
RETD Extension	6,000 galls per diem
<u>TOTAL</u>	<u>73,000 galls per diem</u>

6. The Civil population is stated to be using 800,000 galls per diem. Without some accurate figures it is not possible to say whether this is a reasonable figure, but it would appear to be capable of considerable reduction without hardship. The first group of wells is yielding 850,000 gallons per diem at present and there is nothing to suggest that this figure cannot be maintained throughout the year.

7. The extent of the work now to be done is as follows :-

- * (1) Completion of the Water Tower in the Barracks.
- * (2) Pipe connections from the existing rising main to the Water Tower.
- RE (3) Construction of one additional 12,800 gall tank for the RETD to ensure adequate pressure and storage in that area.
- * (4) Reconstruction work on building structures and rehabilitation of the electricity installation on the pumping station area.
- RE (5) Preparation of two wells in the second group to receive an engine driven pump Type "A" to provide a standby source of supply in the event of failure in Electricity Supply. It is NOT proposed to instal the pump at present.
- RE (6) Construction of an elevated 12,800 gall tank and automatic Chlorinator for SAE.

37

8. Item (1)⁽²⁾ will provide 110,000 gallons of storage and will assist in maintaining a steady pressure in the Main Supply. It will be necessary to connect this Reservoir so that water can feed back into the rising main as no separate distribution main to the Town system is provided. The arrangement is far from ideal, but operated as follows it will be a valuable asset.

9. When the draw off in the Town is normal there will be insufficient pressure in the system to reach the top of the water tower. It is therefore necessary to shut off the Town Supply for six to eight hours per diem to fill the reservoir. To ensure a good pressure in the system, it may be desirable to feed back into the main during certain hours. This will deplete the reserve storage and experience in operating will indicate whether it is necessary.

10. The installation was in the hands of three Contractors :-

- (1) Contractor RIVELLI was responsible for the Water Tower
- (2) Societa Acquedotto Napoli was dealing with the water pipe connections.
- (3) RUFER Company was dealing with Electrical Appliances.

11. The state of the various contracts is shown in the attached statement issued by GENIO CIVILE DI CASERTA.

12. The ACC have been approached and are prepared to assist in dealing with the whole contract matter. It is suggested that you contact The Director, Public Works and Utilities, Sub-Commission at Provincia Buildings, NAPLES. Their address is HQ ACC, APO 394. Phone Vapour (Dial 10050) Ext. 17.

WARS/slv.

W.A.R. Smith
W.A.R. SMITH,
Lieut-Col RE
for Brigadier.
Director of Works

Copy to:- HQ ACC Public Works & Utilities Sub-Commission with reference to conversation (Lt.Cols Lapper - Smith speaking) on 15.5.44.

Comd HQ SMT & HSTD (2 copies)

10.

- (1) (2) (3)

II.

21

W.A.R. SMITH,
Lieut-Col RE

W.A./R. SMITH,
Lieut-Col RE
for Brigadier,
Director of Works

Copy to: - HQ ACC Public Works & Utilities Sub-Commission with
reference to conversation (Lt. Cols Lapper - Smith speaking)
on 15.5.44.

Cond HQ, SMC & RCTD (2 Copies)

225

6
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100

062. Secret #24 •

35.

AQ/8. Folio 65

14/5/44

From H.Q. A.A.I

Information on the
water position in
the Iremite Gps &
Pelagosa -

2252

062 Secret 124
Folio 56.

34

From H.Q. A.F.I.
18/5/44

Report, Natural
Springs in area
Mt. Petrocelli.

2251

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WHH/lp 37

ACC/062/PWU

22 May 1944

Subject: Water Rates.

To : Acquedotto di Torre Annunziata.

1. We have carefully reviewed the data which you have submitted to us in connection with your application to increase water rates, and have arrived at the following conclusion.

2. You are authorized to add a temporary surcharge of not to exceed three-hundred per cent (300%) to all consumer's bills.

3. The surcharge will not apply to taxes collected from the consumer.

4. The surcharge will be based on the bills which were sent out in April for the water consumed in the 3 months prior thereto.

5. The surcharge may be applied as a separate addition to the total amount of all bills for water (excluding taxes) or, it may be applied directly to the various component parts of the basic rates, it being understood that the basic rates remain unaltered and no increase in the meter charge is to be made.

6. A notice must be delivered to consumers with all bills, reading approximately as follows:

"Included in this bill is a temporary surcharge of 300%. This surcharge has been authorized on the request of the Company in order to enable them to meet increased operating costs of the present emergency period".

7. Inasmuch as this action has been authorized in compliance with your request for additional revenues, under no conditions shall any statement be made to your customers that the application of this surcharge has been ordered by the Allied Control Commission or the Allied Military Government.

225

8. You will please send to this Sub-Commission an advance copy of a typical bill, with a copy of the notice referred to.

c.c.to: Minist. Lavori Pubblici.
Regional Commissioner Reg. III .
Economic Section ACC.
File. -

L.A. JENNY,
Lt-Col., C.E.,
Director.

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WAH/lp 31

Subject: Rate Adjustment.
Acquedotto di Torre Annunziata.

18 May 1944

To : Lt-Col.W.M.Lapper.

1. The Acquedotto di Torre Annunziata has submitted its report for the three months ending March 31 1944. The comparison with the estimated statement is as shown on the attached sheet.

2. Based on the actual operating costs there resulted as of March 31 1944 a deficit of £.321,461, attributal in part to the fact that the full cost of repairing services and labor furnished by the Company has not been billed to the customer and in part to extra expenses caused by the eruption of mt.Vesuvioes. The latter being but a small item may be neglected.

3. While the deficit justifies an increase of 333 1/3 %. I recommend an allowance of but 300% on the sale of water and an order to the company to discontinue billing their labor and materials for less than cost.

4. The surcharge should be figured on the bills payable April 1 and added to bills presented July 1st.

Walter A. Hitchcock
WALTER A. HITCHCOCK
Major C.E.

ACQUEDOTTO DI TORRE ANCONZIATA

Operating Statment for Period 1 Jan. 1944 to 31 March 1944

<u>Income</u>	Actual £.	Estimated £.
Sale of Water	97,599	125,000
Meter Rental	12,128	10,500
Miscellaneous	<u>40,157</u>	<u> </u>
Total Income	149,884	135,500
 <u>Expenses</u>		
Productions	91,956	} 325,299
Distribution	213,266	
General	147,618	
Taxes	16,193	23,000
Interst	<u>2,312</u>	<u> </u>
	471,345	348,299
Deficit from Operation	321,461	212,799
Increase needed to wipe out deficit 333 I/3%	<u>325,330</u>	
Surplus	3,869	

Old Letter

5/19/44

At a conference with Tom Coppola
last night he agreed to accept 30%
and desires to send out the bill for
his salary next week around
July 1st. His bills were sent out
in April.

He took exception to the fact that
I did not allow the amortization of
Employs salaries which should have
been allowed but he thought "they
could get along".

Coppola will be in Monday at
2 PM. at which time I told him we
could give the final word.

W.H.

2247

R E P O R T
ON
APPLICATION FOR INCREASE
IN
WATER RATES
BY
SOCIETA ANONIMA PER DERIVAZIONI DELLE ACQUE
di S.MARIA DELLA FOCE ED ALTRE

ACQUEDOTTO DI TORRE ANNUNZIATA

GENERAL DISCUSSION
AND METHOD OF ANALYSIS

Subject: Application for rate increase by Società Anonima per derivazioni delle Acque di S. Maria della Foce ed altre.

General: The above Società has since 1887 undertaken the Water Supply of Torre Annunziata and the Villages Staiano and Poggiomarino. Since the construction of the original scheme in 1887 an additional Hydro-Electric plant and Reservoirs were added in 1926. The source of water is a natural spring situated 9 miles N.E. of Torre Annunziata.

The application of the Company is for an increase of 373% in exerting price charged for water. The application has been conditionally agreed to by the Prefect of Naples and the Genio Civile in a letter dated 4 March 1944.

Considerable damage to property by the German was suffered by this Company. The Hydro-Electric plant and pump house being totally destroyed, beside damage to mains. It has been possible to restore one pump and a second pump is being installed. Bills are rendered quarterly on 4/I, 7/I, 10/I. Population served about 100,000.

Method of Analysis : Profit and loss statements have been obtained from the Company for the years 1942, 1943, and for 1944 as estimated. These are submitted herewith. This application for increase of rates, as with others, has been examined on the basis that it would not be practical nor wise at this time to permit interest on capital, and depreciation and amortization as items of normal operating costs. Therefore only so called "out of pocket" expenses have been considered and balanced against total receipts.

Structural damages caused by the war on property or plant owned by the Company has not been broken down to develop the presence, if any of unusual or unwarranted transaction affecting costs of operation.

The recommended increase in percent of receipts from water sales has been calculated to the nearest 5% or a convenient figure fixed.

FINANCIAL STRUCTURE OF SOCIETA' ACQUEDOTTO DI
TORRE ANNUNZIATA

The Società Anonima per Derivazione delle Acque di S. Maria della Foce ed altre is^a limited Company with a capital of 876.558 with a legal reserve of £.45.058. No Bank-Loans outstanding. No dividends have been paid.

PHYSICAL DESCRIPTION OF WORKS OWNED BY THE COMPANY.

This Company obtains its water from a natural spring 9 miles N.E. of Torre Annunziata with an approximate yield of 120 million litres per day. The water from the spring is compounded in masonry traps and conveyed to the Suction Sump of the main Pumping Station. Excess water was diverted through vertical Water Turbines to actuate 2 double acting Ram pumps and an electrically driven centrifugal pump added in 1926. Water is pumped by these pumps to a Reservoir at elevation 90 m. Torre Annunziata is supplied from this Reservoir by a 300 mm. pipe capacity 45 litres per Sec.

Owing to destruction by the Germans only one ram pump is available and the Hydro-Electric system was entirely destroyed.

The present pumping capacity is 10 litres per Sec. and water is available only in the town for two hours daily.

The centrifugal pumps in addition have been installed by the British Military R.E's and a normal supply of water will be available within the next few weeks on completion of the two Centrifugal Pumps 20 litres per sec., driven by 75 HP Electric Motor.

The population served is as follow:

Torre-Annunziata-Boscotrecase	70.000
Poggiomarino	20.000
Staiano	7.000
	<u>97.000</u>

RECOMMENDATIONS

It is recommended that:

- (1) Rate adjustments be based on actual operating statements after examination and approval by ACC at billing periods.
- (2) The Company be allowed sufficient revenue to meet all "out of pocket" expenses including the contribution or payment of taxes to the Commune.
- (3) Dividend payments be "frozen" for the present emergency period.
- (4) In view of the deficit incurred by the Company permission should be given to the Società Anonima per Derivazioni delle acque di S.Maria La Foce ed altre to increase its rate by 160%. The rates shall operate from 4th February.
- (5) That no increased charge shall be made for rental of meters or any similar service charge which may be in force.

TORRE ANNUNZIATA
APPLICATION FOR INCREASE IN WATER RATE
 Profit and Loss Statement
 1942, 1943 and 1944 (estimated)
 Billing Period quarterly, Feb. 4th, May 4th, Aug. 4th
 Nov. 4th

Income:

	1942	1943	Estimated 1944
From Sale of Water	555.518	500.000	500000
Other sources of income	47.282	35.000	42000
<i>TOTAL</i>	<u>602.800</u>	<u>535.000</u>	<u>542000</u>
<u>Expenses</u>			
Wages and Salaries	352.180	365.000	565088
Materials	321.315	350.000	600000
Energy Electric	2.209	16.000	136108
Taxes	14.509	17.000	17000
Contribution to the Commune of Torre Annunziata	75.000	75.000	75000
<i>Total</i>	<u>766.213</u>	<u>823.000</u>	<u>1.393.196</u>
Deficit	163.413	288.000	851.196

2243

TORRE ANNUNZIATA
APPLICATION FOR INCREASE IN WATER RATE
PROFIT AND LOSS STATEMENT 1944
3 Months Period (estimated)

Income:

From Sale of Water	£. 125.000	
Other sources of income	<u>10.500</u>	£. 135.500
	135.500	

Expenses

Wages and Salaries	141.272	
Materials	150.000	
Energy (electric)	34.027	
Taxes	4.250	
Contribution to the		<u>348.299</u>
Commune of Torre Annunziata	<u>18.750</u>	
	348.299	Deficit 212.799

Increase of Rate necessary	
to cover deficit + 160%	<u>226.800</u>
Surplus	<u>14.001</u>
	=====

160% on 135.500 = 216.800

ACQUEDOTTO

DI

TORRE ANNUNZIATA

:-:-:-:-:-

RENDICONTO DAL 1/1/ - 31/3/944

:-:-:-:-:-

Water 1/2 per. hills under out Aqueduct

BEST COPY POSSIBLE

SOCIETÀ ANONIMA PER DERIVAZIONI DELLE
ACQUE DI S.TA MARIA DELLA FOCE ED ALTRE

Capitale versato L. 600.000 — Sede NAPOLI

C. P. E. C. N. 21513 - C/c. Postale N.º 6-1312

ACQUEDOTTO DI TORRE ANNUNZIATA

Napoli 11 16 Maggio 1944. -

ALLIED CONTROL COMMISSION

Public Works and Utilities Sub- Commission

APO 394

N A P O L I

OGGETTO: - Trasmissione rendiconto. -

In riferimento alla V/ lettera Iº Maggio 1944, ci preghiamo rimetterVi un rendiconto e Nº 4 allegati delle entrate e delle spese, dal Iº Gennaio al 31 Marzo 1944, ricavato da documenti e contabilità adattati per la sua compilazione in conformità del V/ formulario. -

In merito all'aumento, riteniamo doveroso farVi rilevare:

- Iº) - Nonostante le difficoltà finanziarie verificatesi nel settembre scorso, abbiamo prima provveduto al ripristino dell'esercizio dell'Acquedotto e poi richiesto l'aumento del prezzo dell'acqua in base alle nuove esigenze. -
- 2º) - La domanda del 25 febbraio c.a. fu da noi consegnata all' A.M.G. Sezione P.U. che richiese il parere del Prefetto e del Genio Civile. -
- 3º) - Con nota nº 1694 del 4/3/944 il Genio Civile ha espresso parere favorevole agli aumenti da noi richiesti ed illustrati per ogni singola categoria di spese. -
- 4º) - Con nota Nº 2548 del 4/3/944 il Prefetto ha espresso parere favorevole alla n/ richiesta. -
- 5º) - Le lettere originali, indicate nei numeri 3 e 4, furono allegate alla n/ domanda del 25 febbraio 1944 e consegnate a codesta Commissione. -
- 6º) - A vostra richiesta, abbiamo consegnato una relazione sull'aumento del prezzo ed un questionario in conformità dei modelli presentati. -

Seguito della lettera 16 Maggio 1944 alla Commissione Alleata di Controllo sub-Commissione lavori ed Utilità Pubbliche. -

7°) - Il 1° Maggio ci è stato da Voi richiesto il rendiconto e gli allegati di cui è oggetto la presente. -

Dai documenti innanzi citati risulta chiaramente:

- a) che l'esercizio dell'Acquedotto non può essere continuato, senza aumentare i prezzi di vendita dell'acqua e dei noli e manutenzione contatori, per adeguarli al reale attuale costo dei materiali, mano d'opera e diversi, così come si è già fatto per altri Pubblici Servizi, come le tramvie, Funicolari, Ferrovie Secondarie, ecc. -
- b) che il deficit del 1° trimestre non può essere ancora tenuto in sospeso, nè può essere ulteriormente aggravato, dovendosi pagare i lavori e forniture già effettuati e non trovandosi ulteriore credito per la Società. -
- c) che le entrate attuali sono appena sufficienti per il pagamento del solo personale, mentre è da prevedere un ulteriore aumento dei salari che già è in discussione presso le competenti Autorità. -
- d) che su richiesta del Governo Militare Alleato le Autorità Italiane, di fronte alla difficile situazione prevista fin dal febbraio scorso, hanno già dato il 4 Marzo c.a. il loro consenso all'aumento, come da noi richiesto. -
- e) che mentre gli aumenti concessi per altri pubblici servizi, gravano sugli utenti per decine di lire al giorno, gli aumenti da noi richiesti ci mettono in condizioni di espletare regolarmente un Pubblico Servizio vitale, gravando sulla massa degli utenti soltanto un aumento di pochi centesimi al giorno. -

La n/ Società quindi ha fatto tutto ciò che era in suo potere per l'eser


- 3 -

Seguito della lettera 16 Maggio 944 alla Commissione Alleata di Controllo
sub-Commissione Lavori ed Utilità Pubbliche. -

cizio dell'Acquedotto e nessun addebito potrà esserle fatto per quanto dipende e
dipenderà dalla sua insostenibile situazione finanziaria, e specialmente per il
mancato pagamento delle forniture indispensabili. -

Preghiamo perciò codesta Commissione volersi compiacere esaminare con corte
se urgenza la n/ giustificata e fondata richiesta ed autorizzarci all'applicazio-
ne degli aumenti. -

SOCIETA ANONIMA PER DERIVAZIONI DELLE ACQUE
DI SANTA MARIA DELLA FUCE ED ALTRE
A. AMMINISTRATORI

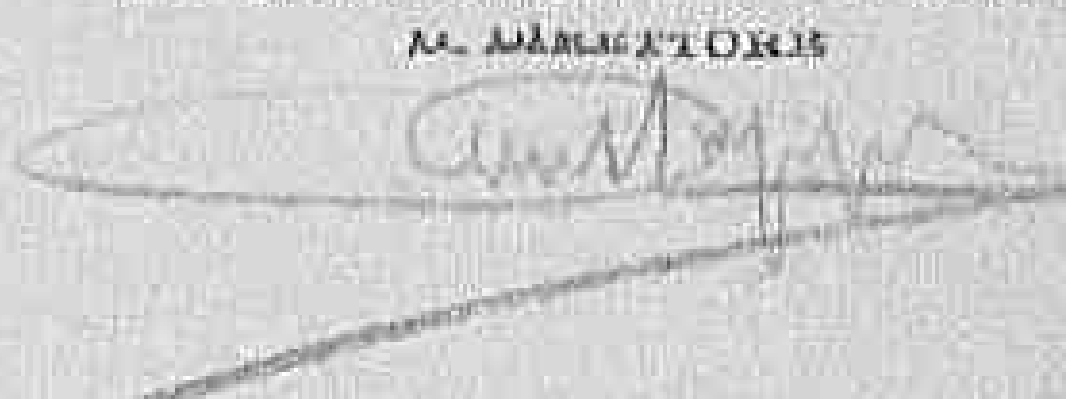

Annessi N° 1 rendiconto e 4 allegati. -

Recapito: - Napoli - Piazza Nazionale 50 - telefono 53.517

Torre Annunziata - Via Parini. -

SOCIETÀ ANONIMA PER DERIVAZIONI DELLE
ACQUE DI S.TA MARIA DELLA FOCE ED ALTRE

Capitale versato L. 600.000 — Sede NAPOLI

C. P. E. C. N. 21513 - C/c. Postale N.° 6-1312

— ACQUEDOTTO DI TORRE ANNUNZIATA —

RAPPORTO MENSILE (O PERIODICO)

Società Acquedotti

Nome della Società - Società Anonima per Derivazione delle Acque di S.Maria
della Foce ed altre. -

Località - Sede in Napoli

Servizio - Terre Annunziata - Poggioreale - Striano.

Dal - 1° Gennaio 1944 Al - 31 Marzo 1944. -

Periodo di fatturazione - Trimestrale

Fondi in cassa alla fine del periodo di fatturazione - L. 7.256,35 -

<u>Entrate:</u> Acqua venduta (al dettaglio)	L. 75.220,15
" " (all'ingrosso)	"
" " (Ai Municipi)	" 22.378,90
Nole contatori (e manutenzione)	" 12.127,80
1. Interessi	"
Altri introiti 2 Dividendi	"
3 Diversi	" 40.157,35 (a)
Totale	L. 149.884,20

Spese di esercizio

Acqua (acquistata) L. (1)

2

Mano d'opera (alle sorgenti, presa d'acqua)

" " (Acquedotto)

L. 39.120,24

" " (Impianti pompe)

Energia Elettrica

" 43.200,00 (2)

Materiali

" 7.635,35

Diversi

" 2.000,00

Totale spese di esercizio

L. 91.955,59

Spese per la distribuzione dell'acqua:

Manutenzione dei serbatoi

L. (3)

Pompaggio (mano d'opera)

" (4)

" (Materiali)

" (5)

Energia elettrica

" (6)

Tubazioni (Mano d'opera)

" 47.634,86

" (Materiali e lavori)

" 107.806,05 (7)

Contatori e servizi (Mano d'opera)

" 57.825,00 (8)

" " " (Materiali)

"

Diversi

Totale spese di distribuzione

L. 213.265,91

Spese Generali

Stipendi dei Funzionari

" degli Impiegati

L. 94.385,47 (9)

Spese di posta

"

a Riportare

223.94.385,47

- 3 -

	Riporto	L. 94.385,47
Forniture diverse	"	28.078,86 (10)
Altre spese	"	25.153,25 (11)
Totale spese generali	L.	147.617,58

Totale spese di esercizio	L. 91.955,59
" " distribuzione	" 213.265,91
" " Generali	" 147.617,58

Totale	L. 452.839,08
--------	---------------

Entrate	" 149.884,20
---------	--------------

Perdita dell'esercizio	L. 302.954,88	L. 302.954,88
------------------------	---------------	---------------

Spese Generali (Amministrative)

Ammortamento (Impianti di produzione)	}	L. 27.081,00
" (" distribuzione)		

Altri ammortamenti	" 27.348,00
--------------------	-------------

Tasse	" 16.192,85 ✓
-------	---------------

Interessi su prestiti	"
-----------------------	---------

Interessi su obbligazioni	" 2.312,25 ✓
---------------------------	--------------


L. 72.943,10	" 72.943,10
--------------	-------------

Totale perdita dell'esercizio	L. 375.897,98
-------------------------------	---------------

Dati Statistici:

Totale fatturazione acqua	L. 97.599,05
---------------------------	--------------

Totale fatturazione noli e manutenzione contatori	" 12.127,80
---	-------------



- 4 -

Totale incassi su fatture (del corrente esercizio)	L.
" " " " (arretrate)	" 74.798,40
" fatture arretrate (del corrente esercizio)	"
" " " (dei precedenti esercizi)	" 137.454,30
" Acqua acquistata	Mo.
" " immessa nelle tubazioni	Mo. 190.140
" " venduta al dettaglio	Mo. 148.803
" " venduta all'ingrosso	Mo.
Numero dei consumatori serviti	N° 2.910.-

Aumenti di salari e paghe. -

In conformità di ordine Regionale in data 11 Dicembre 1943 furono appertati gli aumenti stabiliti al personale dipendente. - Detti aumenti hanno avuto decorrenza anteriore al periodo 1° Gennaio - 31 Marzo 1944. -

Percentuale di ammortamento e spese riparazioni danni di guerra. -

Gli ammortamenti sono stati calcolati in maniera lineare in rapporto alla durata della concessione e riferite le quote al periodo 1° Gennaio - 31 Marzo 1944. -

Nel rendiconto non sono comprese spese per danni di guerra, perchè i lavori vengono eseguiti a cura e spesa del Genio Civile. -

Tasse pagate od allocate per il corrente esercizio. -

L'ammontare totale delle tasse è di L. 16.192,85. -

La loro percentuale è variabile e dipende dagli accertamenti che esegue il

- 5 -

fisco in base ai bilanci annuali. -

Nel rendiconto manca la tassa in surrogazione non ancora accertata e pagata e manca la cartella dei nuovi accertamenti che probabilmente perverrà nei mesi prossimi. -

Contratti speciali. -

Non vi sono contratti speciali con conti speciali. -

Il solo Comune di Torre Annunziata gode di una tariffa speciale per i suoi usi di L. 0,30 al mc. -

(a) - Entrate diversi L. 40.157,35

Questa cifra riguarda lavori eseguiti e già liquidati e pagati dagli utenti e non è più suscettibile di aumento o rettifica. -

Spese di esercizio

(1) - Acqua (acquistata). - L'acqua proviene da sorgenti di n/ proprietà. -

(2) - Energia elettrica - L'impianto di sollevamento alle sorgenti venne totalmente distrutto e per il periodo dal 1° Gennaio al 31 Gennaio l'acqua è stata sollevata in quantità insufficiente, bastevole per una distribuzione di N° 2 ore al giorno. - Col 12 febbraio 944 è stata messa in esercizio una elettropompa il cui consumo non ancora è stato fatturato dalla Società elettrica ma che da calcoli approssimati si è ricavato in L. 43.200,00

Spese per la distribuzione dell'acqua

(3) - Manutenzione dei serbatoi - Non si sono sostenute spese per mancanza di fondi.

(4) - Pompaggio (mano d'opera)

(5) - Pompaggio (materiali)

(6) - Energia elettrica

Per la distribuzione non vi è pompaggio né consumo di energia elettrica. -



- 6 -

(7) - Tubazioni (materiali e lavori)

Della somma di L. 107.806,05 è stata differita la somma di L. 59.863,70 per
mancanza di fondi. -

(8) - Contatori e servizi. -

Tutta la somma non è stata pagata e differita per mancanza di fondi. -

Spese Generali

(9) - Stipendi dei Funzionari e degli Impiegati

Non si è tenuto conto della quota di aumento da versare al fondo indennità di
licenziamento. -

(10) - Forniture diverse. -

Della somma indicata nel rendiconto è stata differita per mancanza di fondi
la somma di L. 27.975,91. -

(11) - Altre spese. -

Sono state differite L. 21.594,50 per mancanza di fondi. -

Vi sono altre spese differite che al momento non si conoscono ma che verranno
liquidate in seguito ed imputabili al trimestre di cui è oggetto il presente
rendiconto. -

SOCIETÀ ANONIMA PER DERIVAZIONI DELLE ACQUE
DI SANTA MARIA DELLA FOCE ED ALTRE
AL DIRETTORE

Alberto Loppolo

Napoli li 16 Maggio 1944. -

Certifico vero e perfetto il rendiconto di cui sopra
degli affari della Società Anonima per derivazione delle acque di Santa
Maria della Foe ed altre per il periodo ~~quadrimestre~~ ^{trimestre} *quadrimestre*

*Certifico in ogni sostanza e stato che la firma che pre-
cede è del Sig. ~~Alberto Loppolo~~ ^{Alberto Loppolo} Direttore e Legale
rappresentante della Società Anonima per derivazione delle acque*

ALLEGATO N° 1

LISTA DELLE SPESE DIFFERITE CHE RICADONO NELL'ESERCIZIO

1° GENNAIO-31 MARZO 1944

Energia Elettrica

Il consumo dell'energia elettrica indicato (2) nel rendiconto non è stato fatturato dalla Società Elettrica nè è stato pagato. -

Manutenzione Serbatoio.

La manutenzione del Serbatoio e dei castelli di carica indicata (3) nel rendiconto non è stata eseguita per mancanza di fondi e nei prossimi mesi dovrà essere effettuata. -

Tubazioni (materiali e lavori).

Della somma indicata (7) nel rendiconto L. 59.863,70 non sono state pagate per mancanza di fondi. -

Contatori e servizi.

Tutta la somma indicata (8) nel rendiconto non è stata pagata per mancanza di fondi.

Forniture diverse.

Della somma indicata (10) nel rendiconto, L. 27.976,11 non sono state pagate per mancanza di fondi. -

Altre spese.

Della somma indicata (11) nel rendiconto, L. 21.594,50 non sono state pagate per mancanza di fondi. -

• / •

- 2 -

Imposte e Tasse. -

Oltre l'ammontare delle Imposte e Tasse accertate e pagate vi sarà certamente altre somma da pagare quando perverrà la cartella delle imposte per 1944. - Di più è da te ner conto che sull'aumento di tariffa che sarà concesso, l'uno per cento per l'impo- sta sull'entrata graverà sull'aumento stesso. -

Fitto Locali. -

Per i locali di Ufficio occorrono riparazioni agli infissi e manutenzione che non si è potuta eseguire per mancanza di fondi. -

Stampe e cancelleria. -

Si è dovuto rinviare la stampa delle schede per gli utenti, di bollettari e moduli per mancanza di fondi. -

Postali - Telegrammi e Telefoni. -

Nel rendiconto non è stata segnata alcuna somma perchè i servizi di posta, telegrammi e telefoni non erano in funzione. Essendo ora ripristinati nei prossimi mesi si dovrà sopportare la relativa spesa. -

Illuminazione e riscaldamento. -


Nel rendiconto sono state comprese solamente i noli contatori senza il consumo perchè la Società Elettrica non ha inviato le fatture. -

Spese legali, Notarili, Assembleari e Carta bollata. -

Nel rendiconto, mancano le spese legali, perchè queste vengono liquidate a fine di anno, analogamente avviene per le Notarili. - Le spese Assembleari ed i compensi ai Sindaci si avranno nei prossimi mesi dopo l'assemblea degli Azionisti. -

Manutenzione - Sorgenti e impianto sollevamento. -

Molte spese occorrenti alle sorgenti ed al macchinario di sollevamento sono state dif- ferite per mancanza di fondi, e per mancanza di mezzi di trasporto. 223

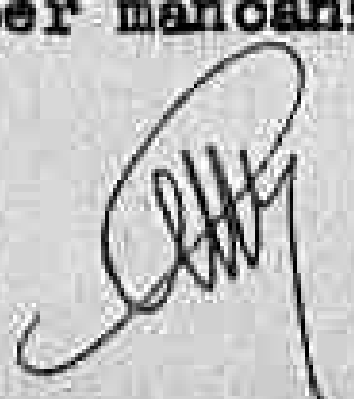

- 3 -


Manutenzione condutture - cambio saracinesche - svellimento basoli - manutenzione
impianti e diversi. -

Molte spese si sono dovute differire per mancanza di fondi e per deficienza di mezzi
di trasporto. -

=====

L'ammontare di tutte le spese sopraelencate non può essere precisato, stante la va-
riabilità dei prezzi del mercato e della mano d'opera. -

CONSIGLIO COMUNALE DEL MUNICIPIO DI NAPOLI
DI SANTA MARIA DELLA FOVE ED ALTRE
CANTIERI COMUNALI

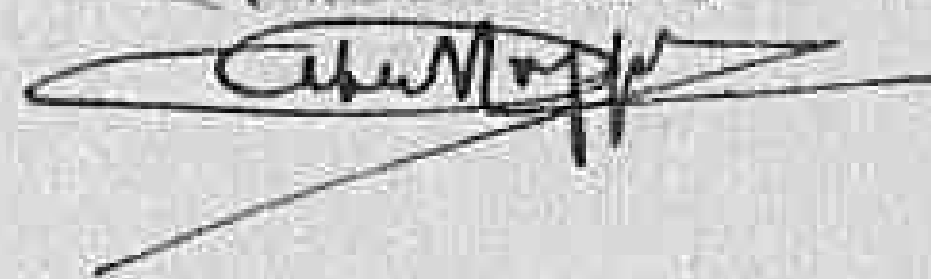

Napoli 11 16 Maggio 1944. -

ALLEGATO N° 2

DESCRIZIONE DELLA SOCIETÀ ED ELENCO CONSIGLIERI

Nel 1887 la Ditta Bartolomeo Mazza & C. acquistò dal Principe di Ottaviano le sorgenti il Mulino, i fabbricati ed il terreno ad essi adiacenti in S. Maria della Foce nel tenimento di Sarno. - Nello stesso anno 1887 la Ditta ottenne dal Comune di Torre Annunziata la concessione per la costruzione ed esercizio di un Acquedotto per convogliare e distribuire l'acqua delle proprie sorgenti nel territorio della Città di Torre Annunziata. -

Il 31 Ottobre 1899 fu costituita la Società Meridionale Derivazione Acque, che acquistò dalla Ditta Mazza & C. La proprietà delle sorgenti, Mulino, fabbricati e terreni, nonché la concessione dell'Acquedotto di Torre Annunziata. -

Tale acquisto venne effettuato in data 24 Gennaio 1900. -

La Società Meridionale Derivazione Acque cambiò la sua denominazione in "Società per la Derivazione delle Acque delle Sorgenti di S. Maria la Foce ed altre." ed il capitale iniziale di L. 20.000,00 venne elevato a L. 600.000,00, che all'epoca aveva equivalente valore in oro. -

Attualmente il capitale della Società è di L. 600.000,00. -

Elenco dei Consiglieri. -

- | | |
|-----------------------------------|---------------------|
| 1°) - Comm. Rag. Angelo Tibò | - Presidente. - |
| 2°) - Comm. Guglielmo Cutolo | - Vice Presidente - |
| 3°) - Dott. Mario Merolla | - Consigliere - |
| 4°) - Ing. Ferdinando Frigerio | - Consigliere - |
| 5°) - Cav. Uff. Raffaele Pezzullo | - Consigliere - |

Napoli li 16 Maggio 1944

SOCIETÀ MERIDIONALE PER DERIVAZIONE DELLE ACQUE
DI SANTA MARIA DELLA FOCE ED ALTRE

Autografo 2220

ALLEGATO N° 3

ELENCO DELLE OBBLIGAZIONI E DELLE AZIONI

Obbligazioni. -


- 1°) - Con deliberazioni dell'Assemblea Straordinaria degli Azionisti in data 10/4/1900 furono emesse delle obbligazioni al tasso del 4 % per un ammontare di L. 600.000,00
- 2°) - Con deliberazione dell'Assemblea Straordinaria degli Azionisti del 3/4/1909 furono emesse obbligazioni al tasso del 5 % per un ammontare di L. 75.000,00. -

Azioni. -

- 1°) - Con l'atto costitutivo della Società del 31 Ottobre 1899 venne fissato il capitale Sociale in L. 20.000,00 mediante emissione di azioni da L. 100,00 ognuna. -
- 2°) - Con deliberazione dell'Assemblea Straordinaria degli Azionisti del 24/1/1900 venne aumentato il Capitale Sociale a L. 600.000,00 mediante altra emissione di azioni da L. 100,00 ognuna. -

Il capitale quindi è formato fin dal 24 Gennaio 1900 da N° 6.000 azioni da L. 100,00 ognuna e per un totale di L. 600.000,00. -

VERBALE DELLA ASSEMBLEA STRAORDINARIA DEL 24 GENNAIO 1900
DELLA SOCIETA' DI RACCOMANDA DI AZIONI

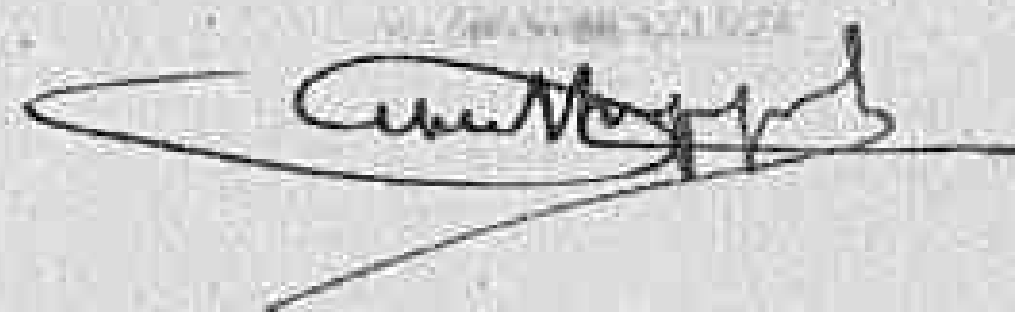

Napoli li 16 Maggio 1944. -

ALLEGATO N° 4

PERDITE E PROFITTI	1940	1941	1942
<u>Perdite. -</u>			
Conto Manutenzione	223.019,71	205.322,18	279.855,95
Interessi obbligazioni	1.000,00	875,00	750,00
Interessi conti A. e B.	-----	2.357,90	1.753,45
Spese Generali	240.676,95	255.635,85	241.363,37
Ammortamento Acquedotto	4.300,00	4.300,00	4.300,00
	468.996,66	468.490,93	528.022,77
<u>Profitti. -</u>			
Produzione acqua	405.734,95	433.691,65	480.518,20
Fitto contatori	7.854,00	7.819,10	7.830,75
interessi o/o.	990,10	634,85	646,25
Utili vari	20.440,70	25.957,54	38.805,22
	435.019,75	468.103,14	527.800,42
Perdita esercizio in corso	33.976,91	387,79	222,35
	468.996,66	468.490,93	528.022,77

Napoli li 16 Maggio 1944. -

SOCIETA' ANONIMA PER DERIVAZIONI DEL 1908
O, SANTA MARIA DELLA FOCE ED ALTRE

AL DIRETTORE



HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

30
GER/ccb

ACC/O62/PWU

22 May 1944

Subject: Decree 12 April 1944. N°127 Pugliese Aqueduct.
Increase in price of water.

To : Ministry of Public Works,
att: Sig. Tizzano, Director General.

1. The above was published in Gazzetta Ufficiale N°27,13 May 44.
2. This Sub-Commission has no knowledge of the matter. Will you kindly explain the circumstances, and why, and to what extent the increases were granted.

L. A. JENNY,
Lt.-Col., C.E.,
Director.

Copy

on 134

222

TORRE ANNUNZIATA WATER Co.

Application for Rate increase 4/3/44 after tentative agreement to review by Prefect and Genio Civile.

Supplemental statement of operations filed 18/5/44.

Report on specifications and recommendations 19/5/44.

Conference New Coppola 5/19

29

2225

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

GER/ccb
28

ACC/062/PWU

3 Mar 44

Subject: Water Companies, applications for charges increases.

To : The Director General, Technical Services,
Ministry of Public Works,
Museo Nazionale, 2nd floor,
Via Foria, corner of Salita,
Naples.

1. Reference discussions already held with you and the three local applications you now have (Naples, Pozzuoli, Vesuviana) I send six copies of the detailed information to be supplied.

2. It is understood that you have informed the three Companies that, in the first instance, you are considering their applications.

L.A. JENNY,
Lt-Col., C.E.
Director.

2224

29

WATER COMPANIES

Subject: Rate increase applications

Replies

1. Name of Company
2. Whether subsidiary of another Company.
3. Has Co. subsidiary companies ?
If so give names. When was Co. established ?
4. Location of Head Office
n (for correspondence)
5. (a) Map showing general distribution, supply lines and territory served.
(b) Give capacities of main supply arteries.
6. (a) Water from own sources; or if bought in bulk state price paid, and from whom.
(b) Date of agreement with selling company, and date of expiry.
7. No. of people actually supplied, and names of Communes.
8. Average quantity of water supplied per 24 hours.
9. Quantity per head per day ($= 8 \div 7$).
10. Proportions (a) domestic supplies (%)
(b) industries (%)
11. (a) Employees by general categories, and numbers new on payrolls.

222

4. Location of Head Office
(for correspondence)
5. (a) Map showing general distribution, supply lines and territory served.
(b) Give capacities of main supply arteries.
6. (a) Water from own sources; or if bought in bulk state price paid, and from whom.
(b) Date of agreement with selling company, and date of expiry.
7. No. of people actually supplied, and names of Communes.
8. Average quantity of water supplied per 24 hours.
9. Quantity per head per day ($= 8 \div 7$).
10. Proportions (a) domestic supplies (%)
(b) industries (%)
11. (a) Employees by general categories, and numbers now on payrolls.
(b) Average wages paid; lire per day for each category.
(c) Total wages paid 1942, 1943.
(d) " " " estimated in 1944.
12. Maintenance costs exclusive of any depreciation or amortization allowances for 1941 and 1942, including ALL salaries, labour, supplies, materials, transport etc.
13. Monthly totals of (12) listed by months.

= 1 =

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works & Utilities Sub-Commission
APO 394

LAJ/efe 26

ACC/072/PWU

20 February 1944

Subject: Form of presentation of Utility Rate Increase Reports.

To : Lt. Col. Lapper.
" " Laboon. ✓

In presenting your analysis of rate increase requests the following form of presentation will be used so that all reports follow a uniform pattern.

1. A brief description of the property, what it is, where located, extent of property, locations of power plants, substations or transformer stations, reservoirs, gas plants, etc. etc., size or capacity of such units and any other pertinent data that will help higher officials, who will review these reports, to obtain a quick picture of the size and relative importance of the property involved. (This should be in short form, not over 2 pages, and clearly written in a form so that "he who runs may read".)
2. Give names of all subsidiaries of such company, or, if the property covered is a subsidiary of some parent company, so state.
3. Give a quantitative outline of the production of such property, including all by-products, etc.
4. Capital Structure. First list the various bond issues in their respective priorities, if any priority exists, otherwise lowest interest bearing first and highest last, giving number of bonds outstanding, denominations and total sum in lire, then a grand total in lire of all bonds. Next list all outstanding stock, par value if any, and total sum, then a grand total in lire of all stock.
Following this, list all bank loans outstanding, amounts, interest rate to be paid, and monthly amortization, and amount of interest, and total of such monthly expense, chargeable to operating expenses.

2222

25
5. Revenues. List all yearly revenues of whatever source and monthly averages, including sale of main product, by-products, interest received from investments, etc.

6. Operating Expenses. List all annual expenses chargeable to operation, with monthly averages, including purchase of power, materials, supplies, maintenance, labor, amounts to be paid on loans, etc. (Lt. Col. Lapper and Laboon will agree on a uniform sequence of these elements so that all reports follow the same pattern) (Make a statement that no depreciation or amortization is included)

7. Brief report of survey of property, highlights, condition, amount of destruction, % of capacity in operation, what should be done to increase capacity (if that is needed and is simple) efficiency of operation, inefficiency and waste, use of by-products or lack of use, with a brief analysis of simple remedies to improve output and consequent increase of revenues.

8. Recommendation. "A" Here first state (and restrict this to vital recommendations) things which must be done to improve plant and output. Then give a statement of revenues and adjusted expenses as you may consider these to be proper if expenses appear too high, then the annual deficit with monthly average.

"B" State what the present rates are for the various classes of service and what they will have to be to merely meet monthly operating expenses, with percentages of increase.

"C" State what these rates should be if 2% is allowed, then 4% on outstanding bond issues in addition to bare operating costs, and % of increase over present rates.


L. A. JENNY,
Lt. Col., C.E.R.
Director.

cc Lt Col Rhodes.

222

HEADQUARTERS
ALLIED CONTROL COMMISSION
Public Works and Utilities Sub-Commission
APO 394

WAH/lp

9 May 1944

Subject: Public Utility Rate Investigations.

To : Lt-Col. J.F. Laboon.

On order of Lt-Col. Jenny, the Div. of P.W. & U. was made responsible for investigations of applications for increase in rates by all utilities with the exception of Electric Companies. On King's Italy, applications for rate increases were directed to the Minister of Public Works. Applications for rate increase in the Army Zone were to be submitted through Regional Offices but again this division did not wait for routine procedure in the interest of time. So far, two classes of Utilities rates have been studied - Gas and Water.

GAS COMPANIES

At the request of the Public Utility Companies, investigations were made of the various manufacturing plants of the Gas Companies in Southern Italy. The plant at Salerno, Bari, Nocera, Castellammare di Stabia and Naples were inspected and work started on rate adjustments.

Due to the King taking over the control of the provinces South of Naples all work on plants in that area was discontinued and the companies then informed that rate matters would have to be submitted to the Ministry of Public Works for recommendations to us.

On those plants in the Military Zone the investigations were completed and reports and recommendations on new rates made on the following plants:

Naples Gas Co.

Castellammare Gas Co.

(The final approval for the latter company is awaiting the statement of actual operation for the period Jan.-March 1944).

WATER COMPANIES

To date only companies in the Military Zone have been investigated or have requested adjustment of rates:


Naples Water Co. The report was completed and recommendations made for an increase.

2220

23
Vesuviana Water Co. Report complete, supplemental statement filed and recommendations made to allow an increase of 125%.

Torre Annunziata Water Co. Report completed but no recommendations will be made until the company files its supplemental operating statement.

Pozzuoli Water Co. The report completed and recommendations of increase submitted. Awaiting now the filing of actual operating statement Jan-March 1944.

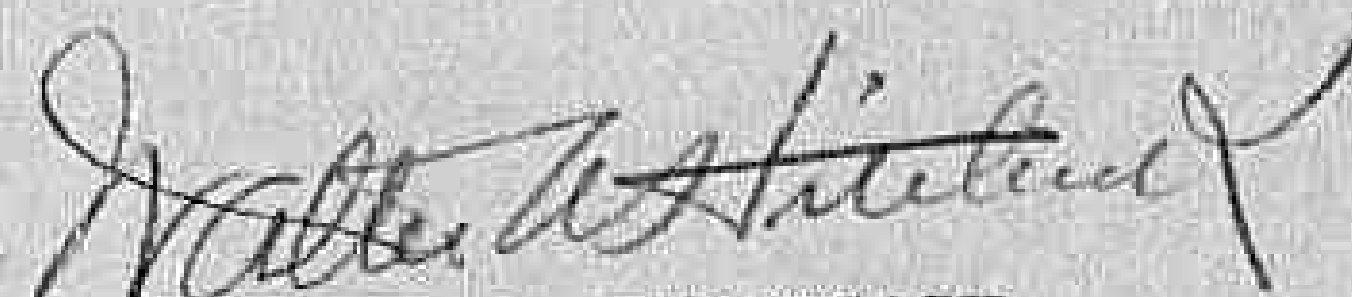

WALTER A. HITCHCOCK
Major C.E.

Note: M.L. = Millions
of Lire

WATER COMPANIES

Applications for Rate Increases.

(Brief summary of Applications)

ACC/062/PWU

1. Acquedotto Di Napoli.

(a) On 5th Jan 44 Company applied to AMG for increased rates to be charged to consumers. In 1942 the revenue was nearly 30 M.L., this being made up of 21.6 M.L. domestic and institutions, 4.4 M.L. municipalities, and about 4 M.L. industries. Contract quantities amounted to about 20 M.L., and what the company terms "Surplus" quantities 9.9 M.L. These excesses, or surpluses, appear to be charged at higher rates than the normal.

For 1944 the probable income is put at only 21 M.L., of which industries will be only 0.8 M.L., domestic etc 16.6 M.L., and municipalities 3.5 M.L. Diminution about 9 M.L.

Expenses in 1942 were 28 M.L. and in 1943 33.6 M.L., so that even in 1943 (according to the submission) expenses exceeded income by well over 3 1/2 M.L.. For 1944 with expenses constantly expanding, the figure is put at 40 M.L.

(b) Apart from that, the company points out that Regional Order No 2 of AMG (concerning Wages and Salaries) imposed an average increase in these of about 60%, equal to a further expenditure in 1944 of 9 M.L.; Thus, the 1944 expenses are put at 49 M.L. and if income is reduced to 21 M.L. the deficiency will thus be 28 M.L..

(c) To meet this, charges to consumers are proposed to be increased by 140%, e.g. private houses from lire 0.65 to 1.60 per cubic metre, industries 0.5 to 1.2, and so on; also "Surplus" supplies in similar proportion.

(d) Company's states that these increases will cover ordinary expenses exclusively, without taking into account a return on the capital invested; also not taking into account war-damage. They point out that present charges are the same as they were 20 years ago.

(e) Meters are read quarterly on 4 Feb, 4 May, 4 Aug, and 4 Nov. Contract quantities are paid for in advance, and the "surplus" consumption later after due calculation. Company stress that their calculations are temporary, and may be varied in actual fact.

being made up of 21.6 M.L. domestic and institutions, 4.4 M.L. municipalities, and about 4 M.L. industries. Contract quantities amounted to about 20 M.L., and what the company terms "Surplus" quantities 9.9 M.L. These excesses, or surpluses, appear to be charged at higher rates than the normal.

For 1944 the probable income is put at only 21 M.L., of which industries will be only 0.8 M.L., domestic etc 16.6 M.L., and municipalities 3.5 M.L. Diminution about 9 M.L..

Expenses in 1942 were 28 M.L. and in 1943 33.6 M.L., so that even in 1943 (according to the submission) expenses exceeded income by well over 3 1/2 M.L.. For 1944 with expenses constantly expanding, the figure is put at 40 M.L.

(b) Apart from that, the company points out that Regional Order No 2 of AMG (concerning Wages and Salaries) imposed an average increase in these of about 60%, equal to a further expenditure in 1944 of 9 M.L.; Thus, the 1944 expenses are put at 49 M.L. and if income is reduced to 21 M.L. the deficiency will thus be 28 M.L..

(c) To meet this, charges to consumers are proposed to be increased by 140%, e.g. private houses from lire 0.65 to 1.60 per cubic metre, industries 0.5 to 1.2, and so on; also "Surplus" supplies in similar proportion.

(d) Company's states that these increases will cover ordinary expenses exclusively, without taking into account a return on the capital invested; also not taking into account war-damage. They point out that present charges are the same as they were 20 years ago.

(e) Meters are read quarterly on 4 Feb, 4 May, 4 Aug, and 4 Nov. Contract quantities are paid for in advance, and the "surplus" consumption later after due calculation. Company stress that their calculations are temporary, and may be varied in actual fact.

(f) The increased rates above noted were approved by AMG on 12 Jan 1944; over the signature of a Capt. Wingate. The endorsement stated that increases were approved on a temporary basis "Waiting final decision of the Economic Commission".

2. The above proposals were apparently examined by the Genio Civile, and their report dated 15 Feb 44 was signed by Sig. Pettineo, the Hydraulic Engineer and by Sig. Tizzano, the Chief Engineer? Their report is little more than a re-statement of the Company's application, expressed in different words, and a recommendation that A.C.C. should agree to the overall increase in charges of 140%. The Genio Civile add, however, that the increase should be considered to be of a temporary nature only, subject to further rectification in the light of experience. (They also say that the revised rates should be heard according to "The opinion of the Commune of Naples", which has contractual relations

with the Company.
meaning of this)

At the moment, I am not clear as to the exact

3. S.A.I.M.E. (Pozzuoli Water, near Naples).

There are 3 letters from this Company dated 16 Nov 43, 26 Jan 44, and 27 Jan 44. I have had translations made. The application is for very heavy increases in charges. It has not been examined by the Genio Civile, but such examination will have to be made. The Nov letter was full of detail and was addressed to the Mayor of Pozzuoli, the Prefect of Naples, and to AMG Pozzuoli. A very brief summary is as follows:-

- (a) The Commune formally managed the Water Works, there was a deficit, and the Company took over in Jan 1939 following competitive bids
- (b) Fascist activities described and condemned, and the difficulties the Company suffered. Materials could only be bought on the black market, increasingly, and their cost went up from 400 to 800% (expressed in Lire.) Position of employees economically very serious with average wage 25 lire a day. Cannot retain men. State that Allied Command is paying from 50 to 150 lire per day. Charges for water remain at the 1937 level. Examples given of local railways, charges increased 100% or considerably more.
- (c) If increases allowed, effect on about 85% of consumers almost negligible, a few Lire a month. Burden of maintaining meters in working order, on accuracy of which all revenue is based.
- (d) Proposal to increase charges by 100% viz domestic supplies from 1.50 to 3.00 Lire per cubic metre, trade supplies from 2 to 4, and so on. Cost of "surplus" supplies to be increased from 25% to 82% above the normal rates.
- (e) Several other points also set out which would operate in favour of the Co. e.g. water supplied free to the Commune to be reduced from 85,000 to 25,000 cubic metres per year; certain special concessions

There are 3 letters from this Company dated 16 Nov 43, 26 Jan 44, and 27 Jan 44. I have had translations made. The application is for very heavy increases in charges. It has not been examined by the Genio Civile, but such examination will have to be made. The Nov letter was full of detail and was addressed to the Mayor of Pozzuoli, the Prefect of Naples, and to AMG Pozzuoli. A very brief summary is as follows:-

(a) The Commune formally managed the Water Works, there was a deficit, and the Company took over in Jan 1939 following competitive bids

(b) Fascist activities described and condemned, and the difficulties the Company suffered. Materials could only be bought on the black market, increasingly, and their cost went up from 400 to 800% (expressed in Lire.) Position of employees economically very serious with average wage 25 lire a day. Cannot retain men. State that Allied Command is paying from 50 to 150 lire per day. Charges for water remain at the 1937 level. Examples given of local railways, charges increased 100% or considerably more.

(c) If increases allowed, effect on about 85% of consumers almost negligible, a few Lire a month. Burden of maintaining matters in working order, on accuracy of which all revenue is based.

(d) Proposal to increase charges by 100% viz domestic supplies from 1.50 to 3.00 Lire per cubic metre, trade supplies from 2 to 4, and so on. Cost of "surplus" supplies to be increased from 25% to 82% above the normal rates.

(e) Several other points also set out which would operate in favour of the Co. e.g. water supplied free to the Commune to be reduced from 85,000 to 25,000 cubic metres per year; certain special concessions to be revoked; Company will pay over to Commune 4% on its receipts.

4. The letter 26 Jan 44 was submitted, apparently, after the Co. had heard that the Naples Co. had been granted an increase of 140% in their charges to consumers. Since the Pozzuoli Co. buys its water in bulk from the Naples Co., and will therefore have to pay this 140%, they wish to withdraw and amend their application of 16 Nov. A sharp distinction is drawn, rightly or wrongly, between the two Companies on the ground that the water itself does not cost the Naples Co. any more than it did before the war; the Naples Co. does not have to buy the water, it actually owns it. If the Pozzuoli Co. has to pay 140% more for its raw material (i.e. water), then taking this into account along with all the other increased charges already outlined, their charges should be increased not by 100%, but by 230%.

5. The letter 27 Jan 44 refers to a meeting to be held the following

20
day. The actual new tariffs asked for are set out on the enclosure marked 3. (That enclosure has not been translated as it is too lengthy and involved).

6. The above papers from the Pozzuoli Co. seem to have been in this office for sometime, and they have not received attention until now, which is unfortunate; but in any event the application must be seen, in the first instance, by the Genio Civile.

7. Acquedotto Vesuviano Resina near Naples.

This Company applied on 11 Feb 44 to Region III T.C. & P.U. Sect. who sent it immediately to ACC. The statement of 9 Feb 44 gives details and I summarize as follows:-

(a) This Co. serves towns round the foot of Mt. Vesuvius to the number of 18. It is of Belgium Nationality and has its main office at Liege, Belgium. The branch office for management is at Regina near Naples. There are 350 K.M. of pipelined, distributing the "Serino" water. Water is bought in bulk from the Naples Co., like that of the Pozzuoli Company. At the end of the concession the pipeline are to be the property of the Communes.

(b) Usual reasons are given for the application. The various Communes each have different scales of charges (a serious complication).

(c) Working expenses in 1942 were 1.64 M.L., and the estimate for 1944 is 3.90 M.L. Since 1942 owing to lack of materials, proper maintenance has not been possible, and to make up for this the 1944 maintenance figure may be 30% higher than the proper annual average. They say that in recent months the Genio Civile has applied a 350% increase in the cost of excavation and metal works.

(d) To the 1944 total expenditure should be added 0.22 M.L. to balance a certain Insurance Fund.

7. Acquedotto Vesuviano Resina near Naples.

This Company applied on 11 Feb 44 to Region III T.C. & P.U. Sect. who sent it immediately to ACC. The statement of 9 Feb 44 gives details and I summarize as follows:-

(a) This Co. serves towns round the foot of Mt. Vesuvius to the number of 18. It is of Belgium Nationality and has its main office at Liege, Belgium. The branch office for management is at Regina near Naples. There are 350 K.M. of pipelined, distributing the "Serino" water. Water is bought in bulk from the Naples Co., like that of the Pezzuoli Company. At the end of the concession the pipeline are to be the property of the Communes.

(b) Usual reasons are given for the application. The various Communes each have different scales of charges (a serious complication).

(c) Working expenses in 1942 were 1.64 M.L., and the estimate for 1944 is 3.90 M.L.. Since 1942 owing to lack of materials, proper maintenance has not been possible, and to make up for this the 1944 maintenance figure may be 30% higher than the proper annual average. They say that in recent months the Genio Civile has applied a 350% increase in the cost of excavation and metal works.

(d) To the 1944 total expenditure should be added 0.22 M.L. to balance a certain Insurance Fund.

(e) In 1942 the Naples Co. were paid 1.45 M.L., equivalent to 0.389 per cubic metre of water. That figure will go up to 3.91 M.L., allowing for a drop of 10% in the water sold.

(f) Thus, the price per cubic metre will be raised to 1.168 L, an increase of about 3 times.

(g) Workmens wages are taken at 68% increase. Charges required to be increased by 200% for the water, and by 279% for hiring and maintenance of meters. Tabular statement given relating to the 18 Communes in detail.

(h) This application will also have to be investigated by the Genio Civile.

G.E. Rhodes
Lt. Col. R.E.

20. 2. 44.

(e) In 1945 the Median Co. were being 1.42 W.P., equivalent to offering for a grab of 10% to the water body. That figure will go up to 2.01 W.P. 0.380 per cent more of water.

petence & certain knowledge.

(d) To the extent of

increased in the cost of excavation and rebar work.

The increase in the cost of execution was applied as 350% there being that in recent months the Genito Civilis has suffered a 350% increase in the cost of execution higher than the proper annual average. The inference has not been possible, and to make up for this the 1944 inference has not been possible, and to make up for this the 1944 inference has not been possible, and to make up for this the 1944 inference has not been possible.

of Atlanta edf 523 .J. H. 43.1 525W SAT AT 525WZ 525WZ (c)

Comments each have different scales of operation (e.g. letters combination).
(p) Every resource are given for the objection. The answer is

the property of the community.

the production of the company.
Kensington Company. At the end of the concession the pipeline was to be
water. Water is brought in from the Naples Co.'s line west of the
Naples. There are 320 K.W. of pipeline, distributed the "Sarno".
Belgium. The main office for management is at Belgium near
number of 18. It is at Belgium responsibility and has its main office

1. The above information was obtained from the files of the FBI, New York Office, and is being furnished to you for your information.

only I understand as follows:-

The statement of 2 Sep 44 gives reference to the receipt of 11 Sep 44 to Regfor III L.C. & I.N. 2003.

7. Acquired and Residual Assets and Liabilities.

the first instance, by the Court of Appeals.

The above behavior from the Rosenhoff Co. seems to have been in the

6. The above papers from the Rosenzweig Co. seem to have been in Apple
Joseph and involved).

Joseph and involved).
marked 3. (This envelope has not been translated as it is too
bad. The original was marked for use as the envelope.)

Genito Clavie.

(b) The obligation will time have to be investigated by the

Commence in 1947.

reference of water. Technical statement given relating to the 18
to be increased by 500% for the water, and by 50% for piping and
(a) Workmen wages are fixed at 28% increase. Charges regarding

increases of about 3 times.

(2) Thus, the price per cubic metre will be raised to 1.108 L. and
allowing for a grab of 10% in the water sold.
0.382 per cubic metre of water. Last figure will go up to 3.21 M.P.

(3) In 1945 the Waples Co. were paid 1.42 M.P. expenditure for
refuse & certain insurance fund.

(4) In the 1944 total expenditure should be added 0.55 M.P. to
increase in the cost of excavation and water works.

They say that in recent months the Genito Clavie has applied a 350%
maintenance figure may be 30% higher than the proper current average.
Maintenance has not been possible, and to make up for this the 1944
1944 is 3.20 M.P. Since 1945 owing to lack of materials, proper

(c) Working expenses in 1945 were 1.04 M.P. and the estimate for

Commence each have different scales of charges (a serious complication).
(b) Many reasons are given for the obligation. The various C

the probability of the Commence.

Beznorij Company. At the end of the concession the pipeline are to be
water. Water is bought in bulk from the Waples Co., the price of the
Waples. There are 320 K.M. of pipeline, guaranteeing the "Genito"
of 1944, Belgium. The principal office for management is at Genito near
number of 18. It is of Belgium Nationalist and has its main office

(e) This Co. serves towns round the loop of W.P. Avenue to the

and I estimate as follows:-

are sent to immediately to VCC. The statement of 2 Sep 44 gives details
This Company applied on 11 Sep 44 to Region III L.C. & L.U. Reg.

1. Accounting Statement Before next Waples.

19

REPORT TO THE COMMISSION FOR ECONOMIC AND SOCIAL DEVELOPMENT OF THE UNITED NATIONS

REPORT TO THE COMMISSION FOR ECONOMIC AND SOCIAL DEVELOPMENT OF THE UNITED NATIONS
ON THE ECONOMIC AND SOCIAL DEVELOPMENT OF THE UNITED NATIONS
IN THE YEAR 1944

We have examined the request, dated January 1944, of a rise of the water-rates, asked to the Allied Military Government by the Society of Hospital Aqueduct, in order to be able to counterbalance the rise of expenses and the contribution of income, that this society has suffered owing to war-events.

The rises which are required are the following:

1) FOR THE WATER-RATES AND CONTRIBUTIONS:

Private dwellings	From 0.25 to 1.00 L. per
Charitable institutions	0.25 " " 0.50 " "
Town Premises	" 0.25 " " 0.50 " "
Industries	" 0.50 " " 1.00 " "
Transient Concessions	" 1.00 " " 2.00 " "
Premises not destined for private dwellings	" 0.50 " " 1.00 " "

2) FOR THE CONTRIBUTIONS TO THE FUND FOR THE ECONOMIC AND SOCIAL DEVELOPMENT OF THE UNITED NATIONS

Private dwellings	From 0.25 to 2.00 L. per
Charitable institutions	" 0.25 " " 1.00 " "
Town Premises	" 0.25 " " 0.50 " "
Industries	" 0.50 " " 1.00 " "
Transient Concessions	" 1.00 " " 2.00 " "

We have examined the request, dated January 1944, of a rise of the water-rates, asked to the Allied Military Government by the Society of Metropolitan Engineers, in order to be able to counterbalance the rise of expenses and the contraction of income, that this Society has suffered owing to war-events.

The rises which are required are the following:

(a) FOR THE MONTHS JANUARY TO MARCH 1944:

Private Dwellings	From 0.15 to 1.00	"	"	"
Hotel and Public Buildings	0.25	"	0.50	"
Town Premises	"	0.25	"	0.50
Industries	"	0.50	"	1.00
Transient Concessions	"	1.00	"	2.00
Premises not detailed				
as private dwellings	"	0.80	"	2.00

(b) FOR THE MONTHS APRIL TO DECEMBER 1944:

Private Dwellings	From 0.85 to 2.00	"	"	"
Hotel and Public Buildings	"	0.50	"	1.00
Town Premises	"	0.25	"	0.50
Industries	"	0.75	"	1.50
Transient Concessions	"	1.50	"	3.00
Premises not detailed				
as private dwellings	"	1.20	"	2.00

The new rates should become effective from the 4th of February 1944 for the lowest contractual subscriptions, and from the 4th of November 1944 for the excesses. The re-evaluation of which is made, as by regulations, from the 4th of February 1944. These rates have been 2215 approved, waiting for the final decision of the Municipal Council, with a measure of the 1944, dated 12th of January 1944, and with of

authorisation to apply the new rates from the 1st January 1945 mentioned. The Society denounces that the increase verified in the year 1944, of 29.960.000 liras in round-figure. While it foresees that, in consequence of the war damages the real properties and the industries have suffered in the year 1945, the incomes will, in the assessment of the 1944, be reduced to 20.960.000.-liras, round-figured, amount to which it comes estimating a destruction or a disabbling of the 20% for the industries, of the 20% of the lowest contractual subscription and of the 20% on the excesses for private dwellings and different institutions, and at least of the 20% for the different Commons.-

As for the expenses, the Society denounces that during the 1942 they have amounted, on the whole, to 28.660.000.- liras; during the 1943 they rose to 33.800.000.-liras with an average price of the 20% from that it derives, in the most favourable hypothesis, that this percentage rise will remain unaltered, it foresees the expenses will reach, during the 1944, the amount of 40.000.000.-liras, round figure, and this amount will rise to 49.000.000.-owing to the temporary settlement of salaries and wages to its staff, according to the Regional ordinance No. 2 of the Allied Government. In fact, this settlement, with an average increase of 60% amounts to a rise of 9.000.000.- liras on the expense of about 15.000.000.- substantiated for salaries and wages during the 1945.-

According to the mental and data and hypothesized, the Society amounts to

.(49.000.000.- 28.660.000.-)=20.340.000.000.- the deficiency that presumably will be for the period of 1944 of the Metropolitan Aqueduct and only to refund this deficiency, it makes the above mentioned new rates in the water supply, corresponding to those in force, which have been increased to the 140%.-

The Society requests appear based on likely provisions and, in excess-

for the industries, of the 20% of the lowest contractual subscription and of the 30% on the excesses for private dwellings and different institutions, and at least of the 20% for the different communes.

As for the expenses, the Society denounces that during the 1942 they have amounted, on the whole, to 25,000,000.- liras; during the 1943 they rose to 33,000,000.- liras with an average price of the 20% from that it derives, in the most favourable hypothesis, that this percentage rise will remain unaltered, it foresees the expenses will reach, during the 1944, the amount of 40,000,000.- liras, round figure, and this amount will rise to 49,000,000.- owing to the temporary settlement of salaries and wages to its staff, according to the Regional Ordinance No. 2 of the Allied Government. In fact, this settlement, with an average increase of 50% amounts to a rise of 9,000,000.- liras on the expense of about 15,000,000.- substantiated for salaries and wages during the 1943.

According to the mentioned data and hypotheses, the Society moves to

“(49,000,000.- 25,000,000.-) = 24,000,000.- the deficiency that presumably will be for the period of 1944 of the Metropolitan Aqueduct and only to refund this deficiency, it asks the above mentioned new rates in the water supply, corresponding to those in force, which have been increased to the 140%.”

The Society requests appear based on likely provisions and, in consequence, are worth to be accepted.

But, considering they are, after all, only provisions, which can differ from reality, we propose that the new rates are only temporarily approved, or for a period not superior to six months, with the exception of ratifications and equalizations, which could be brought, according to the results of the periodical verifications on the effective income and expenses.

18

In the revision is to be heard the opinion of the Council of Mayles, which the granting being, and which has regular contractual relations with the mentioned Society.

Mayles. 15 FEB. 1949...

Belville

THE INDEPENDENT EXHIBITION

Chapman



FIG. 1: THE CHIEF OF THE INDEPENDENT EXHIBITION

BOARD OF PUBLIC WORKS

SUPERIOR INSPECTORSHIP OF CIVIL ENGINEERING IN NAPLES

REPORT to the COMMISSION FOR WORKS and PUBLIC SERVICES OF THE ALLIED
MILITARY GOVERNMENT ON THE REQUEST OF A RISE OF THE WATER-RATES,
ASKED BY THE SOCIETY OF THE NEAPOLITAN AQUEDUCT.-

We have examined the request, dated January 1944, of a rise of the water-rates, asked to the Allied Military Government by the Society of Neapolitan Aqueduct, in order to be able to counterbalance the rise of expenses and the contraction of incomes, that this Society has suffered owing to war-events.-

The rises which are required are the following:

A) FOR THE LOWEST CONTRACTUAL SUBSCRIPTIONS:

Private dwellings	from 0,65 L. to 1.60 L. a mo
Charitable Institutions	" 0,25 " " 0.60 " " "
Town Premises	" 0.25 " " 0.60 " " "
Industries	" 0.50 " " 1.20 " " "
Transient Concessions	" 1.00 " " 2.40 " " "
Premises not destined as private dwellings	" 0.80 " " 2.00 " " "

B) FOR THE CONSUMPTION-EXCESSES OF THE MENTIONED LOWEST PRICES

Private dwellings	from 0.85 L. to 2.00 L. a mo
Charitable Institutions	" 0.45 " " 1.00 " " "
Town Premises	" 0.25 " " 0.60 " " "
Industries	" 0.70 " " 1.70 " " "
Transient Concessions	" 1.50 " " 3.60 " " "
Premises not destined	

We have examined the request, dated January 1944, of a rise of the water-rates, asked to the Allied Military Government by the Society of Neapolitan Aqueduct, in order to be able to counterbalance the rise of expenses and the contraction of incomes, that this Society has suffered owing to war-events.-

The rises which are required are the following:

A) FOR THE LOWEST CONTRACTUAL SUBSCRIPTIONS:

Private dwellings	from 0,65 L. to 1.60 L. a mo
Charitable Institutions	" 0,25 " " 0.60 " " "
Town Premises	" 0.25 " " 0.60 " " "
Industries	" 0.50 " " 1.20 " " "
Transient Concessions	" 1.00 " " 2.40 " " "
Premises not destined as private dwellings	" 0.80 " " 2.00 " " "

B) FOR THE CONSUMPTION-EXCESSES OF THE MENTIONED LOWEST PRICES

Private dwellings	from 0.85 L. to 2.00 L. a mo
Charitable Institutions	" 0.45 " " 1.00 " " "
Town Premises	" 0.25 " " 0.60 " " "
Industries	" 0.70 " " 1.70 " " "
Transient Concessions	" 1.50 " " 3.60 " " "
Premises not destined as private dwellings	" 1.10 " " 2.60 " " "

The new rates should become efficient from the 4th of February 1944 for the lowest contractual subscriptions, and from the 4th of November 1943 for the excesses, the ascertainment of which is made, as by regulations, from the 4th of February 1944.--These rises have been temporarily approved, awaiting for the final decision of the Economical Commission, with a measure of the A.M.G. , dated 12th of January 1944, and with an

authorization to apply the new rates from the above mentioned dates.-

The Society denounces that the incomes verified in the period 1942 were of 29.960.000 liras in round-figures. While it foresees that, in consequence of the war damages the real properties and the industries have suffered in the year 1943, the incomes will, in the ascertainment of the 1944, be reduced to 20.960.000.-liras, round-figure; an amount to which it comes estimating a destruction or a disabling of the 80% for the Industries, of the 20% of the lowest contractual subscriptions and of the 30% on the excesses for private dwellings and different Institutions, and at last of the 20% for the different Commons.-

As for the expenses, the Society denounces that during the 1942 they have amounted, on the whole, to 28.000.000.- liras; during the 1943 they rose to 33.600.000.-liras with an average price of the 20% from that it derives, in the most favourable hypothesis, that this percentual rise will remain unaltered, it foresees the expenses will reach, during the 1944, the amount of 40.000.000.-liras, round figure, and this amount will rise to 49.000.000.-owing to the temporary settlement of salaries and wages to its staff, according to the Regional ordinance No2 of the Allied Government? In fact, this settlement, with an average increase of 60% amounts to a rise of 9.000.000.- liras on the expense of about 15.000.000.- substaigned for salaries and wages during the 1943.-

According to the mentioned data and hypotheses, the Society amounts to

L. (49.000.000.- 28.000.000.-) = L. 21.000.000.- the deficiency that presumably will be for the period of 1944 of the Neapolitan Aqueduct. and only to refund this deficiency, it asks the above mentioned new rates in the water supply, corresponding to those in force, which have been increased to the 140%.-

The Social Service requests - cannot be based on likely provisions and, in conse-

and of the 30% on the excesses for private dwellings and different Institutions, and at last of the 20% for the different Commons.-

As for the expenses, the Society denounces that during the 1942 they have amounted, on the whole, to 28.000.000.- liras; during the 1943 they rose to 33.600.000.-liras with an average price of the 20% from that it derives, in the most favourable hypothesis, that this percentual rise will remain unaltered, it foresees the expenses will reach, during the 1944, the amount of 40.000.000.-liras, round figure, and this amount will rise to 49.000.000.-owing to the temporary settlement of salaries and wages to its staff, according to the Regional ordinance No2 of the Allied Government? In fact, this settlement, with an average increase of 60% amounts to a rise of 9.000.000.- liras on the expense of about 15.000.000.- substaigned for salaries and wages during the 1943.-

According to the mentioned data and hypotheses, the Society amounts to

L. (49.000.000.- 28.000.000.-)=L.28.000.000.- the deficiency that presumably will be for the period of 1944 of the Neapolitan Aqueduct. and only to refund this deficiency, it asks the above mentioned new rates in the water supply, corresponding to those in force, which have been increased to the 140%.-

The Society requests appear based on likely provisions and, in consequence, are worth to be accepted.-

But, considering they are, after all, only provisions, which can differ from reality, we propose that the new rates are only temporarily approved, or for a period not anterior to six months, with the exception of rectifications and equalizations, which could be brought, according to the results of the periodical verifications on the effective incomes and expenses.

In this revision is to be heard the opinion of the Common of Naples, which is the granting Being, and which has regular contractual relations with the mentioned Society.-

Naples... 15 FEB. 1944


L. Felice

THE INTRUSTED ENGINEER



VISA: THE CHIEF OF THE INSPECTORSHIP

Carpan

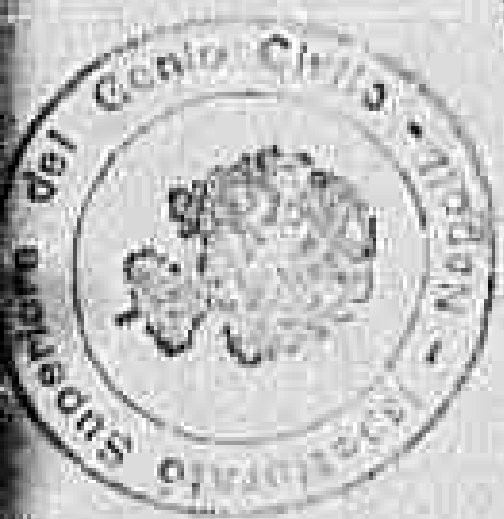

VISA: THE CHIEF OF THE INSPECTORSHIP

Chapman

221

MINISTERO DEI LAVORI PUBBLICI
ISPETTORATO SUPERIORE DEL GENIO CIVILE CON SEDE IN

NAPOLI

=====

RELAZIONE alla Commissione Lavori e Servizi Pubblici del Comando Militare Alleato, sulle richieste di aumento di tariffe per la vendita dell'acqua, avanzate dalla Società dell'Acquedotto di Napoli.

Si sono esaminate le richieste di aumento delle tariffe per la vendita dell'acqua, fatte al Governo Militare Alleato dalla Società dell'Acquedotto di Napoli in data gennaio 1944, per poter bilanciare l'aumento delle spese e la contrazione dei redditi, cui essa Società si è trovata esposta per effetto degli eventi bellici.

Gli aumenti richiesti sono qui di seguito riportati:

A) Per i minimi contrattuali di abbonamento

Abitazioni private	da L. 0,65 a L. 1,60 a mc.
Opere Pie	" " 0,25 " " 0,60 " "
Locali Municipali	" " 0,25 " " 0,60 " "
Industrie	" " 0,50 " " 1,20 " "
Concessioni temporanee	" 1,00 " " 2,40 " "
Locali non destinati ad abitazioni private	" " 0,80 " " 2,00 " "

B) Per le eccedenze di consumo su detti minimi

Abitazioni private	da L. 0,85 a L. 2,00 a mc.
Opere Pie	" " 0,45 " " 1,00 " "
Locali Municipali	" " 0,25 " " 0,60 " "
Industrie	" " 0,70 " " 1,70 " "

RELAZIONE alla Commissione Lavori e Servizi Pubblici del Comando Militare Alleato, sulle richieste di aumento di tariffe per la vendita dell'acqua, avanzate dalla Società dell'Acquedotto di Napoli.

Si sono esaminate le richieste di aumento delle tariffe per la vendita dell'acqua, fatte al Governo Militare Alleato dalla Società dell'Acquedotto di Napoli in data gennaio 1944, per poter bilanciare l'aumento delle spese e la contrazione dei redditi, cui essa Società si è trovata esposta per effetto degli eventi bellici.

Gli aumenti richiesti sono qui di seguito riportati:

A) Per i minimi contrattuali di abbonamento

Abitazioni private	da L. 0,65 a L. 1,60 a mc.
Opere Pie	" " 0,25 " " 0,60 " "
Locali Municipali	" " 0,25 " " 0,60 " "
Industrie	" " 0,50 " " 1,20 " "
Concessioni temporanee	" 1,00 " " 2,40 " "
Locali non destinati ad abitazioni private	" 0,80 " " 2,00 " "

B) Per le eccedenze di consumo su detti minimi

Abitazioni private	da L. 0,85 a L. 2,00 a mc.
Opere Pie	" " 0,45 " " 1,00 " "
Locali Municipali	" " 0,25 " " 0,60 " "
Industrie	" " 0,70 " " 1,70 " "
Concessioni temporanee	" 1,50 " " 3,60 " "
Locali non destinati ad abitazioni private	" 1,10 " " 2,60 " "

Le nuove tariffe dovrebbero essere applicate dal 4 febbraio 1944 per i minimi contrattuali e dal 4 novembre 1943 per le eccedenze il cui accertamento viene fatto, come da regolamento, dal 4 febbraio 1944.

Detti aumenti sono stati approvati su una base temporanea in attesa della decisione finale della Commissione Economica, con provvedimento dell'A.M.G. in data 12 gennaio 1944, e con autorizzazione di applicare le nuove tariffe dalle date suddette.

La Società denuncia che i redditi per fornitura d'acqua, accertati nell'esercizio 1942 ascendono a complessive L. 29.960.000 in cifra tonda, mentre prevede che, in conseguenza dei danni bellici subiti nel 1943, dagli immobili e dalle Industrie, essi si ridurranno nell'accertamento del 1944 a L. 20.960.000 in cifra tonda, cifra alla quale perviene valutando una distruzione o comunque inutilizzazione dell'80% per le Industrie, del 20% sui minimi contratti e del 30% sulle eccedenze per gli stabili privati ed Enti diversi ed infine del 20% per i diversi Comuni.

Quanto alle spese, la Società denuncia che nel 1942 esse sono state complessivamente di L. 28.000.000= e nel 1943 si sono elevate a L. 33.600.000= con un aumento medio del 20%, per cui, nella ipotesi più favorevole che tale percentuale di aumento resti inalterata, prevede che le spese raggiungeranno nel 1944 la somma di L. 40.000.000= in cifra tonda che si eleva ancora a L. 49.000.000= per effetto della sistemazione temporanea degli stipendi e dei salari al personale in base all'Ordinanza Regionale n° 2 del Comando Alleato, sistemazione che, difatti, con una maggiorazione media del 60%, importa un aumento di L. 9.000.000= sulla spesa di circa lire 15.000.000= sostenuta nel 1943 per stipendi e salari.

In base ai dati ed alle ipotesi suddette la Società fa ascendere a L. (49.000.000= - 21.000.000) = L. 28.000.000= il deficit che presumibilmente si verificherà per l'esercizio del=

La Società denuncia che i redditi per fornitura d'acqua, accertati nell'esercizio 1942 ascendono a complessive L.29.960.000 in cifra tonda, mentre prevede che, in conseguenza dei danni bellici subiti nel 1943, dagli immobili e dalle Industrie, essi si ridurranno nell'accertamento del 1944 a L.20.960.000 in cifra tonda, cifra alla quale perviene valutando una distruzione o comunque inutilizzazione dell'80% per le Industrie, del 20% sui minimi contratti e del 30% sulle eccedenze per gli stabili privati ed Enti diversi ed infine del 20% per i diversi Comuni.

Quanto alle spese, la Società denuncia che nel 1942 esse sono state complessivamente di L.28.000.000= e nel 1943 si sono elevate a L.33.600.000= con un aumento medio del 20%, per cui, nella ipotesi più favorevole che tale percentuale di aumento resti inalterata, prevede che le spese raggiungeranno nel 1944 la somma di L.40.000.000= in cifra tonda che si eleva ancora a L.49.000.000= per effetto della sistemazione temporanea degli stipendi e dei salari al personale in base all'Ordinanza Regionale n°2 del Comando Alleato, sistemazione che, difatti, con una maggiorazione media del 60%, importa un aumento di L.9.000.000= sulla spesa di circa lire 15.000.000= sostenuta nel 1943 per stipendi e salari.

In base ai dati ed alle ipotesi suddette la Società fa ascendere a L.(49.000.000= - 21.000.000) = L. 28.000.000= il deficit che presumibilmente si verificherà per l'esercizio dell'acquedotto nel 1944, ed appunto al solo fine di colmare tale deficit richiede le suesposte nuove tariffe per la somministrazione dell'acqua, corrispondenti a quelle vigenti aumentate del 140%.

Le richieste della Società appaiono basate su previsioni attendibili, e si ravvisano, pertanto, degne di essere accolte.

Ma poichè si è, tuttavia, nel campo delle previsioni che, come tali, possono differenziarsi dalla realtà, si propone che le

./.

nuove tariffe siano approvate in via temporanea ed in ogni caso per un periodo non superiore ad un semestre, con salvezza delle rettifiche e conguagli che potranno esservi apportate a seconda dei risultati accertamenti periodici sui redditi e sulle spese effettive, e che in detta revisione sia sentito il comune di Napoli, che è l'Ente concedente ed ha regolari rapporti contrattuali con la predetta Società.

Napoli, 15 FEB. 1944

L'INGEGNERE INCARICATO

B. Bellucci

VISTO: IL CAPO DELL'ISPETTORATO

Chian



poli, che è l'Ente concedente ed ha regolari rapporti contrattuali con la predetta Società.

Napoli, 15 FEB. 1944

L'INGEGNERE INCARICATO

Bellicini

VISTO: IL CAPO DELL'ISPettorATO

Chian



2010

A C Q U E D O T T O

144
Su 8/10/19

Risposte

Soggetto : Istanza aumenti tributi

1°- Nome della Compagnia

2°- Se sussidiaria di altra Compagnia

3° Ha la Compagnia Compagnie sussidia
rie? - Se così darne i nomi. Quando la
Compagnia fu fondata?

4°- Sede dell'ufficio centrale (per la c
corrispondenza)

5°-(a) Piano che mostri la distribuzio
ne generale, le linee di alimentazione e
territorio alimentato.

6°-(a) Acqua da sorgenti proprie o se
comprato o pagato in blocco, e da chi.

7°- Numero delle persone attualmente
fornite , e nomi dei Comuni.

8°- Quantità media di acqua erogata in
24 ore

2209

13° Totali mensili del(12) elencati per mese.

14°- Somme pagabili per tasse e concessioni; se queste debbono ancora pagarsi; denominazione di ogni tassa

15° - Dare separatamente la deduzione per il deprezzamento o l'ammortamento del 1941-42, se ve ne è, assieme al tempo medio delle unità depreziate, la durata ed il costo

16°- Finanziario

(a) Prestiti bancari o di altro genere insoluti, dare lista delle banche e somme, annuali da pagarsi così; sono queste assicurate da qualche ipoteca, se così indicare quale.

(b) Buoni, obbligazioni o ipoteche nella loro rispettiva priorità; numero e denominazione; tassi di interesse, somme annuali da pagarsi così

(c) Totale per (a) e (b); pagamenti
annuali

(d) Merci e azioni da pagare. valori, cate
gorie, numero di ciascun tipo e ammontare
totale

(e) Dividendi effettivi pagati nel 1941-42
esposti come tassi di interesse (percentuali)
solo sul capitale (d) suddetto

(f) Totale in lire per (e); pagamenti
annuali.

(g) Dare un rendiconto per il 1941-42-43
e "pro forma" un preventivo per il 1944

17°- Introito

(a) Ammontare in cifre per il 1941-42-43
includendo le vendite del prodotto prin
cipale e sottoprodotto ecc.

(b) Stima per il 1944

(c) Entrata dai canoni, investimenti e
tutte le altre fonti, egualmente per i 3
anni.

(d) Stima per il 1944

18- Deficit previsto e come fronteggiarlo

Proposte specifiche della società

8

ACQUEDOTTO

Soggetto : Istanza aumenti tributi

Risposte

1°-Nome della Compagnia

2°- Se sussidiaria di altra Compagnia

3°- Ha la Compagnia Compagnie sussidiarie?-Se così darne i nomi. Quando la Compagnia fu fondata?

4°- Sede dell'ufficio centrale (per la corrispondenza)

5°-(a) Piano che mostri la distribuzione generale, le linee di alimentazione e territorio alimentato.

6°-(a) Acqua da sorgenti proprie o se comprato o pagato in blocco, e da chi.

7°- Numero delle persone attualmente fornite, e nome dei Comuni.

8°- Quantità media di acqua erogata in 24 ore.

9°-Quantità giornaliera assegnata a persona.

10°-Proporzioni:
(a) rifornimento per uso domestico%

220x

3°- Ha la Compagnia Compagnie sussidiarie?--Se così darne i nomi. Quando la Compagnia fu fondata?

4°- Sede dell'ufficio centrale (per la corrispondenza)

5°-(a) Piano che mostri la distribuzione generale, le linee di alimentazione e territorio alimentato.

6°-(a) Acqua da sorgenti proprie o se comprato o pagato in blocco, e da chi.

7°- Numero delle persone attualmente fornite, e nome dei Comuni.

8°- Quantità media di acqua erogata in 24 ore.

9°-Quantità giornaliera assegnata a persona.

10°-Proporzioni:

(a) rifornimento per uso domestico%

(b) rifornimento per uso industriale %

11°-(a) Impiegati di categorie ganerale e numero attuale sui fogli paga

(b) Media degli stipendi pagati; lire pagate giornalmente per ciascuna categoria

(c) Totale salari pagati nel 1942-1943.

(d) Totale salari previsti per il 1944

12°-Mantenimento delle spese ad esclusione di ogni ammortamento o deprezzamento per il 1941 e 1942, inclusi tutti i salari, i lavori, i rifornimenti, i materiali, trasporti ecc.

13°- Totali mensili del (12) elencati per mese.

14°- Somme pagabili per tasse e concessioni; se queste debbono ancora pagarsi; denominazione di ogni tassa

15°- Dare separatamente la deduzione per il deprezzamento o l'ammortamento del 1941-42, se ve ne è, assieme al tempo medio delle unità depreziate, la durata ed il costo.

16°- Finanziario

(a) Prestiti bancari o di altro genere insoluti, dare lista delle banche e somme, annuali da pagarsi così; sono queste assicurate da qualche ipoteca, se così indicare quale.

(b) Buoni, obbligazioni o ipoteche nelle loro rispettiva priorità, numero e denominazione; tassi di interesse, somme annuali da pagarsi così

(c) Totali per (a) e (b); pagamenti annuali

14°- Somme pagabili per tasse e concessioni; se queste debbono ancora pagarsi; denominazione di ogni tassa

15°- Dare separatamente la deduzione per il deprezzamento o l'ammortamento del 1941-42, se ve ne è, assieme al tempo medio delle unità deprezzate, la durata ed il costo.

16°- Finanziario

(a) Prestiti bancari o di altro genere insoluti, dare lista delle banche e somme, annuali da pagarsi così; sono queste assicurate da qualche ipoteca, se così indicare quale.

(b) Buoni, obbligazioni o ipoteche nelle loro rispettive priorità, numero e denominazione; tassi di interesse, somme annuali da pagarsi così

(c) Totali per (a) e (b); pagamenti annuali

(d) Merci e azioni da pagare, valori, categorie, numero di ciascuno tipo e ammontare totale

(e) Dividendi effettivi pagati nel 1941-42 esposti come tassi di interesse (percentuali) solo sul capitale (d) suddetto

(f) Totale in lire per (e); pagamenti annuali.

(g) Dare un rendiconto per il 1941-42-43 e "pro forma" un preventivo per il 1944

17°- Introito

(a) Ammontare in cifra per il 1941-42-43 includendo le vendite del prodotto principale e sottoprodotto ecc.

(b) Stima per il 1944

(c) Entrata dei canoni, investimenti e tutte le altre fonti, egualmente per i 3 anni

(d) Stima per il 1944

18°- Deficit previsto e come fronteggiato

Proposte specifiche della società

ACQUEDOTTO

Soggetto : Istanza aumenti tributi

Risposte

1°-Nome della Compagnia

2°- Se sussidiaria di altra Compagnia

3°- Ha la Compagnia Compagnie sussidiarie? Se così darne i nomi. Quando la Compagnia fu fondata?

4°- Sede dell'ufficio centrale (per la corrispondenza)

5°-(a) Piano che mostri la distribuzione generale, le linee di alimentazione e territorio alimentato.

6°-(a) Acqua da sorgenti proprie o se comprato o pagato in blocco, e da chi.

7°- Numero delle persone attualmente fornite, e nome dei Comuni.

8°- Quantità media di acqua erogata in 24 ore.

9°-Quantità giornaliera assegnata a persona.

3°- Ha la Compagnia Compagnie sussidiarie? Se così darme i nomi. Quando la Compagnia fu fondata?

4°- Sede dell'ufficio centrale (per la corrispondenza)

5°-(a) Piano che mostri la distribuzione generale, le linee di alimentazione e territorio alimentato.

6°-(a) Acqua da sorgenti proprie o se comprato o pagato in blocco, e da chi.

7°- Numero delle persone attualmente fornite, e nome dei Comuni.

8°- Quantità media di acqua erogata in 24 ore.

9°-Quantità giornaliera assegnata a persona.

10°-Proporzioni:

(a) rifornimento per uso domestico%

(b) rifornimento per uso industriale %

11°-(a) Impiegati di categorie generale e numero attuale sui fogli paga

(b) Media degli stipendi pagati; lire pagate giornalmente per ciascuna categoria

(c) Totale salari pagati nel 1942-1943.

220

(a) Totale salari previsti per il
1944

12°- Mantenimento delle spese ad esclusione di ogni ammortamento o deprezzamento per il 1941 e 1942, inclusi tutti i salari, i lavori, i rifornimenti, i materiali, trasporti ecc.

13°- Totali mensili del (12) elencati per mese.

14°- Somme pagabili per tasse e concessioni; se queste debbono ancora pagarsi; denominazione di ogni tassa

15°- Dare separatamente la deduzione per il deprezzamento o l'ammortamento del 1941-42, se ve ne è, assieme al tempo medio delle unità depreziate, la durata ed il costo.

16°- Finanziario

(a) Prestiti bancari o di altro genere insoluti, dare lista delle banche e somme, annuali da pagarsi così; sono queste assicurate da qualche ipoteca, se così indicare quale.

(b) Buoni, obbligazioni o ipoteche nelle loro rispettiva priorità, numero e denominazione; tassi di interesse, somme annuali da pagarsi così

(c) Totali per (a) e (b); pagamenti annuali

14°- Somme pagabili per tasse e concessioni; se queste debbono ancora pagarsi; denominazione di ogni tassa

15°- Dare separatamente la deduzione per il deprezzamento o l'ammortamento del 1941-42, se ve ne è, assieme al tempo medio delle unità deprezzate, la durata ed il costo.

16°- Finanziario

(a) Prestiti bancari o di altro genere insoluti, dare lista delle banche e somme, annuali da pagarsi così; sono queste assicurate da qualche ipoteca, se così indicare quale.

(b) Buoni, obbligazioni o ipoteche nelle loro rispettive priorità, numero e denominazione; tassi di interesse, somme annuali da pagarsi così

(c) Totali per (a) e (b); pagamenti annuali

(d) Merci e azioni da pagare, valori, categorie, numero di ciascuno tipo e ammontare totale

(e) Dividendi effettivi pagati nel 1941-42 esposti come tassi di interesse (percentuali) solo sui capitali (d) suddetto

(f) Totale in lire per (e); pagamenti annuali.

(g) Dare un rendiconto per il 1941-42-43 e "pro forma" un preventivo per il 1944

17c- Introito

(a) Ammontare in cifra per il 1941-42-43 includendo le vendite del prodotto principale e sottoprodotto ecc.

(b) Stima per il 1944

(c) Entrata dei canoni, investimenti e tutte le altre fonti, egualmente per i 3 anni

(d) Stima per il 1944

18c- Deficit previsto e come fronteggiato

Proposte specifiche della società

0917